



Bestückungsplan - contact layout

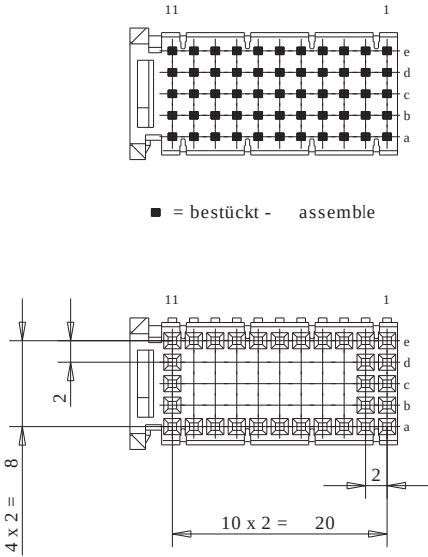


Lochbild für Leiterplatte
(Bestückungsseite)

Board hole pattern
(Component mounting side)

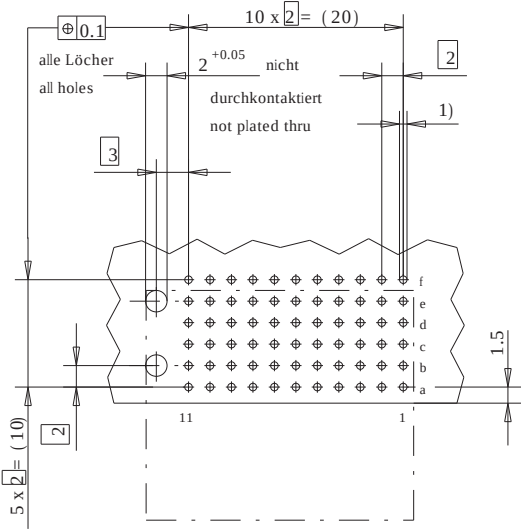

EE-Zone für
durchkontaktierte
Löcher $\varnothing 0.6 \pm 0.05$

Compliant zone for
thru hole
 $\varnothing 0.6 \pm 0.05$

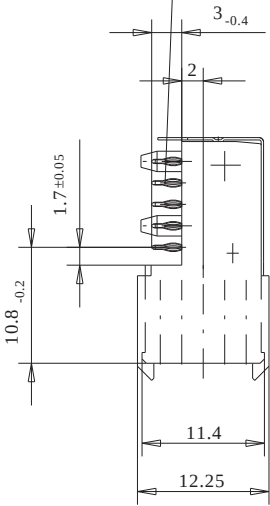

- 1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\varnothing 0.6 \pm 0.05$ Diameter of finished plated-through hole
 $\varnothing 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\varnothing 0.7 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406

Metal plating of plated-through hole
see drawing 114406

Fehlende Masse und Angaben nach IEC 61076-4-101

Bedruckung siehe Zeichnung 401194

Missing information and dimensions per IEC 61076-4-101

Marking see drawing 401194

Information: Abschirmblech oben montiert shielding mounted on top		Tolerances		Scale 2:1	
				Angaben zu entsprechender Ident-Nr. siehe Fertigungsunterlagen For further information about I.D. number see manufacturing document	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
				ERmet Federleiste C ERmet Female Type C	
				064556	
c		03.07.2003		I	
Index		Date		V:00034252.SZN	
				ERMC	