

For a printed version of this information use our FAX-BACK service. Just call 1-800-329-7326 from your fax machine and punch-in FAX-BACK page #217

EAO/SECME AUTODIL and DILECO DIP SWITCHES

- 2 to 12 poles, gold-plated contacts
- Rated 100 mA at 20 VDC
- Compatible with automatic insertion equipment
- Low-profile AUTODIL is tape-sealed for cleaning
- Economical DILECO features raised actuators
- Reliable, positive, visible actuation
- Suitable for wave soldering operations
- 1,000 to 2,000 operations


Specifications

Contacts:	AUTODIL: gold/gold, DILECO: gold/nickel
Rating:	20 VDC/100 mA switching, 50 VDC/100 mA non-switching
Insulation resistance:	>1000 Mohms, 100 VDC
Operating life:	AUTODIL: 2,000 operations, DILECO: 1,000 operations
Terminals:	SnPb plated
Operating temperature:	-20 to 85 degrees C
Sealing:	AUTODIL: top/bottom, DILECO: terminals

Ordering Information

Number of Poles	AUTODIL	DILECO
2	09 20040 02 NG	09 300BH 02 NG
3	--	09 300BH 03 NG
4	09 20040 04 NG	09 300BH 04 NG
5	--	09 300BH 05 NG
6	09 20040 06 NG	09 300BH 06 NG
7	--	09 300BH 07 NG
8	09 20040 08 NG	09 300BH 08 NG
9	--	09 300BH 09 NG
10	09 20040 10 NG	09 300BH 10 NG
12	--	09 300BH 12 NG

Dimensions

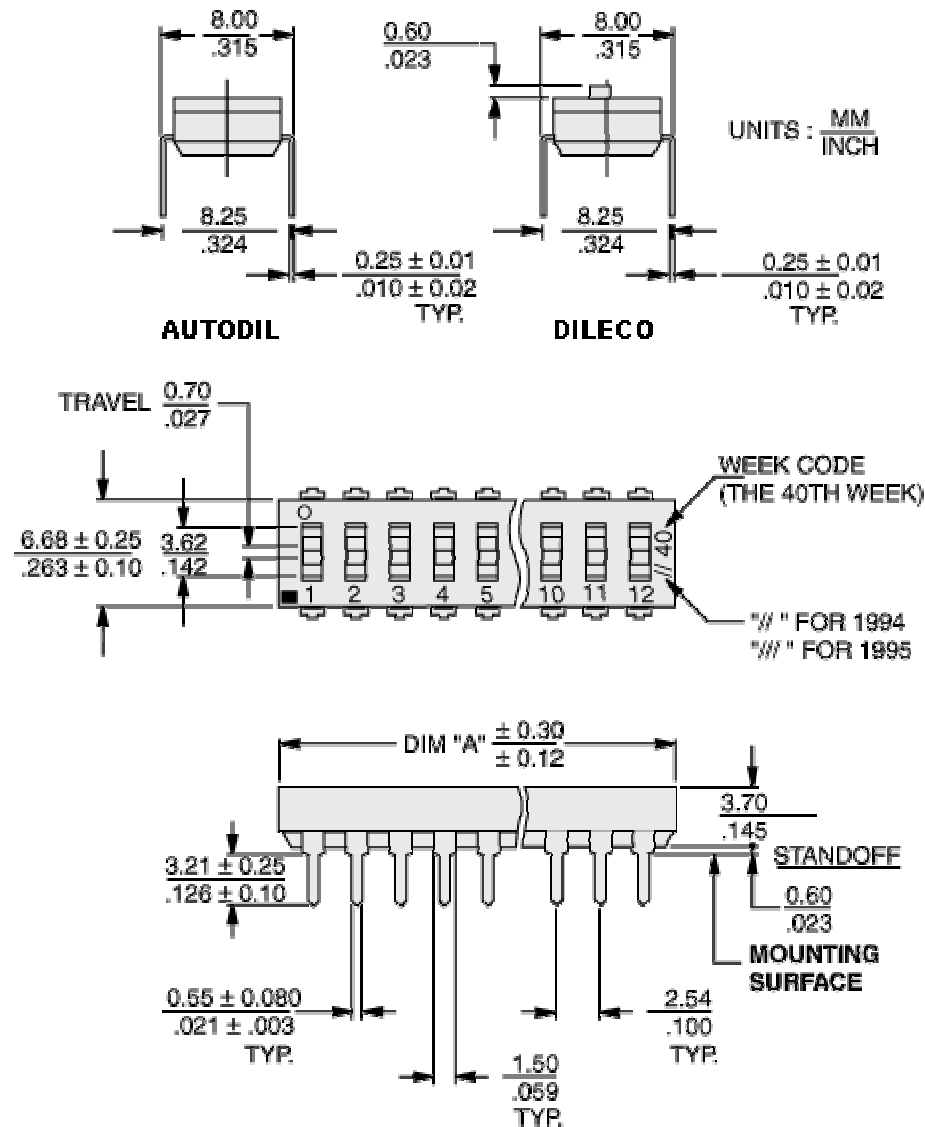

"A" DIMENSION

Poles	mm	inch	Poles	mm	inch
2	6.55	0.258	7	19.25	0.758
3	9.09	0.358	8	21.79	0.858
4	11.63	0.458	9	24.33	0.958
5	14.17	0.558	10	26.87	1.058
6	16.71	0.658	12	31.95	1.258

[HOME](#)

Return to DIP and PCB Jumper Switches