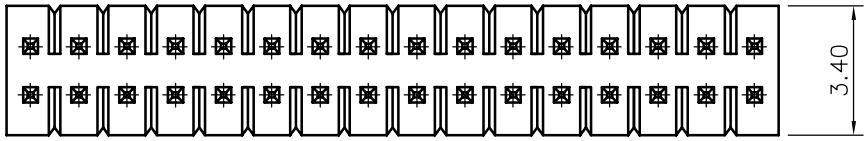

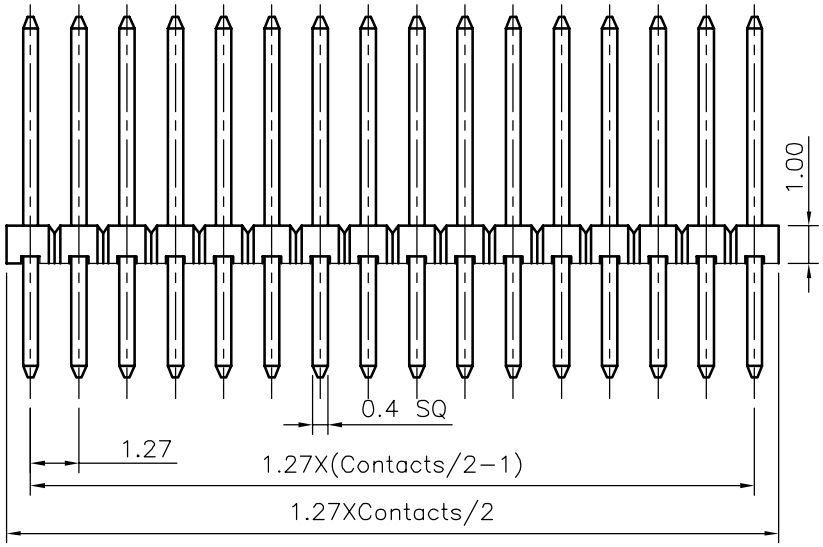

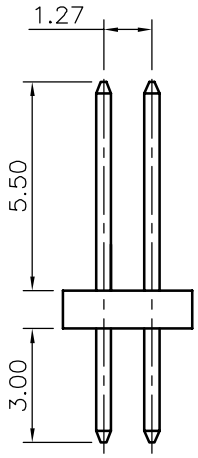

Specifications:
Current rating:1.0 Amps
Voltage rating:50V AC/DC
Dielectric Withstanding:AC 500V
Operating Temperature:−25°C ~ +105°C
Contact resistance:20mohm max.
Insulation resistance:1,000Mohm min.
Materianl
Insulator:High Temperature Material(UL94V−0)
Contact material:Copper Alloy
Plating:Gold Plated
How To Oreder
2199SB−XXG−551030

- Length
- G: Gold Plated
- No. of Position
- Straight Double Row

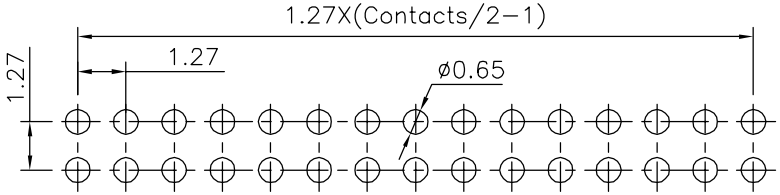

RECOMMENDED P.C.BOARD LAYOUT

REV	DATE	FILE	BY
E			
D			
C			
B			
A	02−Nov−2005	(PC0001)	Cel king

DRAWN: Cel king
CHECKED: Jeremy
APPROVAL: Mike

GENERAL TOLERANCE:
.X=±0.25
.XX=±0.20

UNIT: mm
SCALE:
SHEET: 1 / 1
PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: 1.27X1.27mm Pin Header Straight Double Rows

PART NO: 2199SB−XXG−551030

SIZE: A4