



Silicon Switching Diode


- For high-speed switching applications
- Series pair configuration

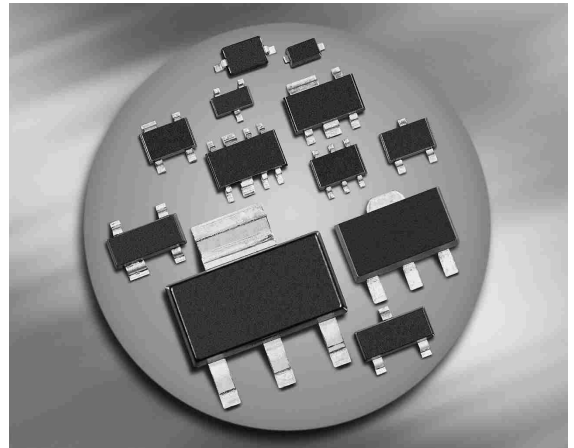

BAV99
BAV99F
BAV99T
BAV99W



BAV99S
BAV99U



Type	Package	Configuration	Marking
BAV99	SOT23	series	A7s
BAV99F*	TSFP-3	series	A7s
BAV99S	SOT363	dual series	A7s
BAV99T	SC75	series	A7s
BAV99U	SC74	dual series	A7s
BAV99W	SOT323	series	A7s

* Preliminary

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	80	V
Peak reverse voltage	V_{RM}	85	
Forward current	I_F	200	mA
Non-repetitive peak surge forward current	I_{FSM}		A
$t = 1 \mu\text{s}$		4.5	
$t = 1 \text{ ms}$		1	
$t = 1 \text{ s, single}$		0.5	
$t = 1 \text{ s, double}$		0.75	
Total power dissipation	P_{tot}		mW
BAV99, $T_S \leq 28^\circ\text{C}$		330	
BAV99F, $T_S \leq \text{td}$		250	
BAV99S, $T_S \leq 85^\circ\text{C}$		250	
BAV99T, $T_S \leq 104^\circ\text{C}$		250	
BAV99U, $T_S \leq 113^\circ\text{C}$		250	
BAV99W, $T_S \leq 110^\circ\text{C}$		250	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BAV99		≤ 360	
BAV99F		$\leq \text{td}$	
BAV99S		≤ 260	
BAV99T		≤ 185	
BAV99U		≤ 150	
BAV99W		≤ 160	


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(BR)} = 100 \mu A$	$V_{(BR)}$	85	-	-	V
Reverse current $V_R = 70 V$ $V_R = 25 V, T_A = 150 ^\circ C$ $V_R = 70 V, T_A = 150 ^\circ C$	I_R	- - -	- - -	0.15 30 50	μA
Forward voltage $I_F = 1 mA$ $I_F = 10 mA$ $I_F = 50 mA$ $I_F = 100 mA$ $I_F = 150 mA$	V_F	- - - - -	- - - - -	715 855 1000 1200 1250	mV

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance $V_R = 0 \text{ V}, f = 1 \text{ MHz}$	C_T	-	-	1.5	pF
Reverse recovery time $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}$, measured at $I_R = 1 \text{ mA}$, $R_L = 100 \text{ }\Omega$	t_{rr}	-	-	4	ns

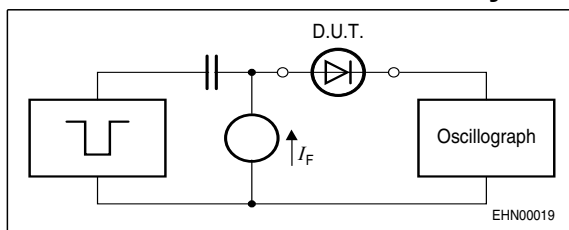
Test circuit for reverse recovery time


Pulse generator: $t_p = 100\text{ns}$, $D = 0.05$,
 $t_r = 0.6\text{ns}$, $R_i = 50\Omega$

Oscilloscope: $R = 50$, $t_r = 0.35\text{ns}$
 $C \leq 1\text{pF}$


Reverse current $I_R = f(T_A)$

$V_R = \text{Parameter}$

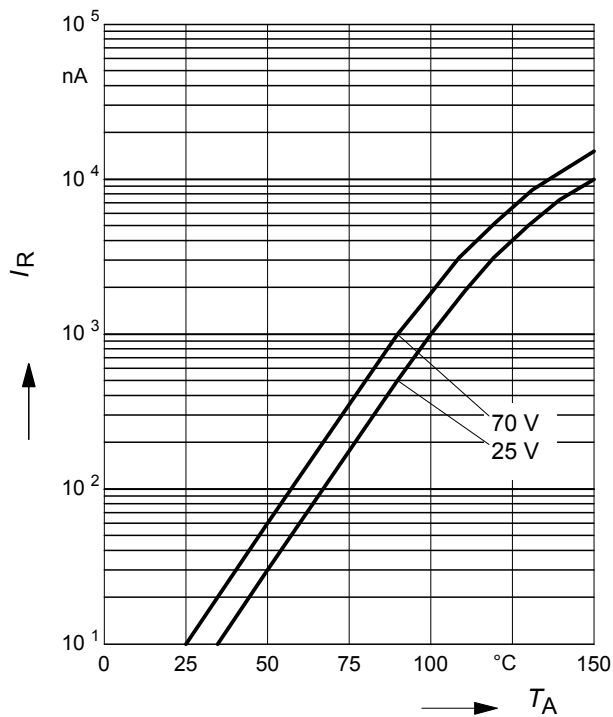


Forward Voltage $V_F = f(T_A)$

$I_F = \text{Parameter}$

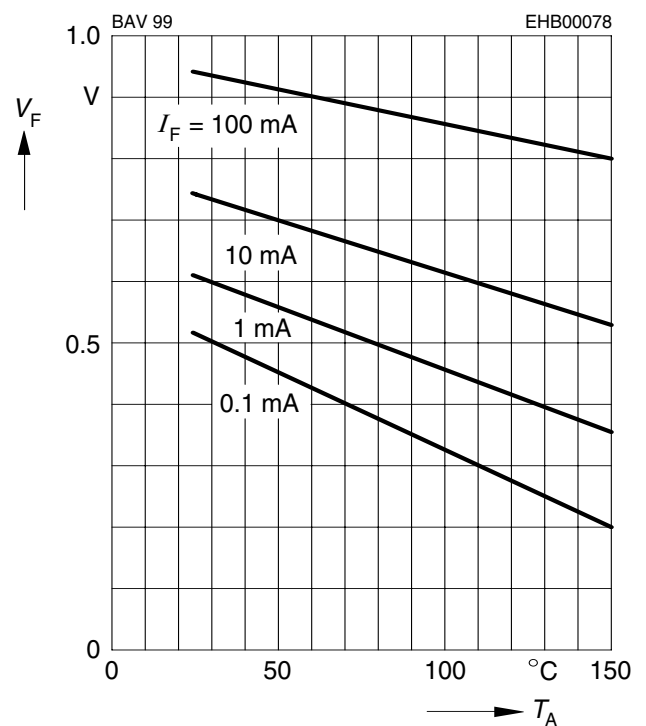


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

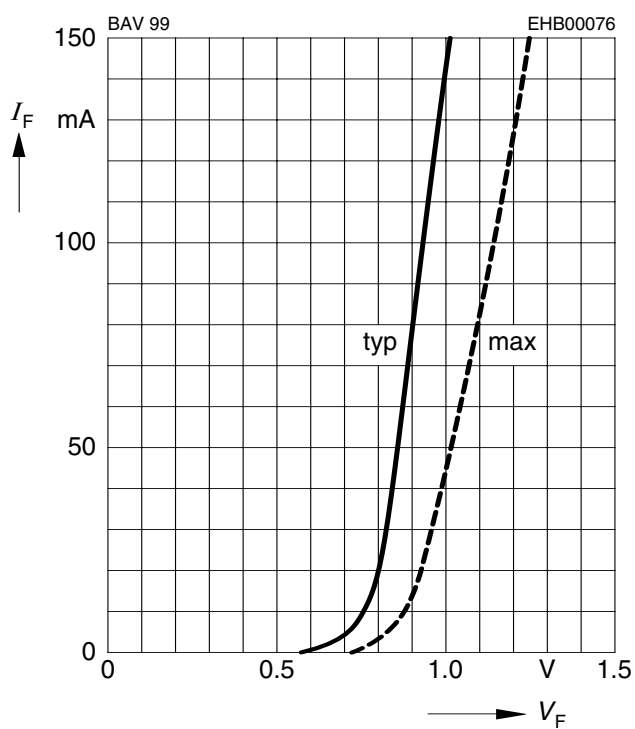


Forward current $I_F = f(T_S)$

BAV99

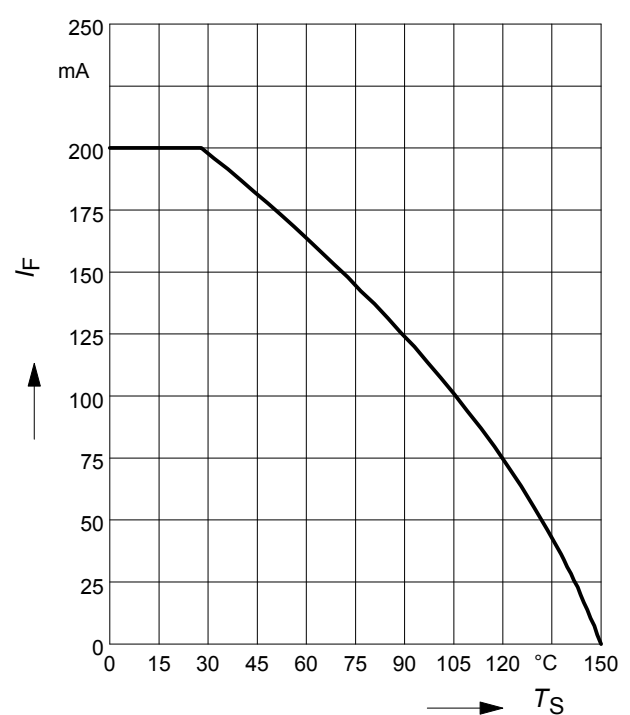


Forward current $I_F = f(T_S)$

BAV99S

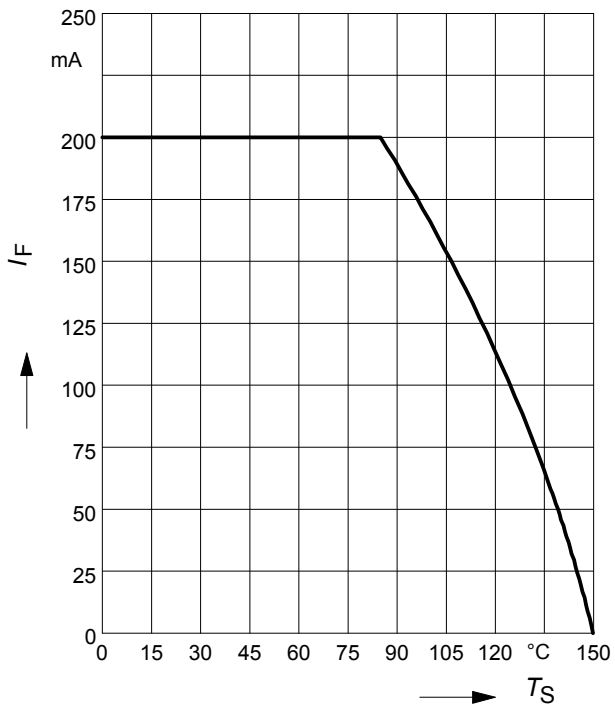


Forward current $I_F = f(T_S)$

BAV99T

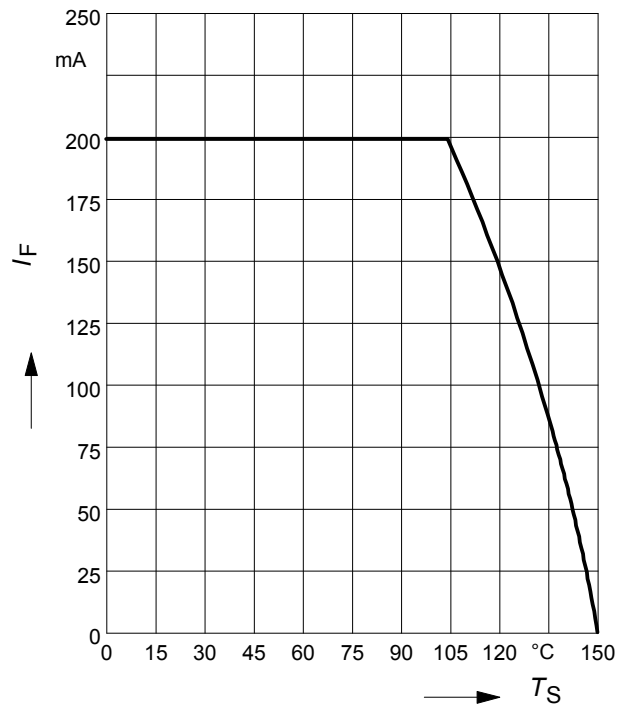


Forward current $I_F = f(T_S)$

BAV99U

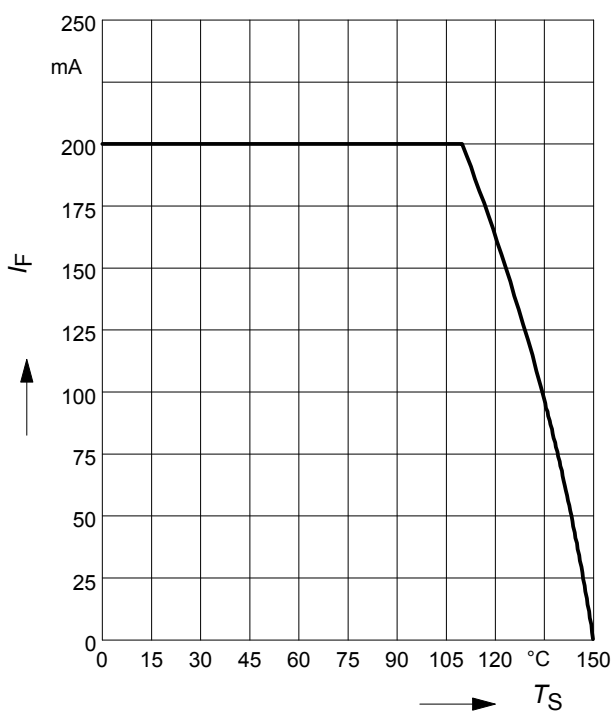


Forward current $I_F = f(T_S)$

BAV99W

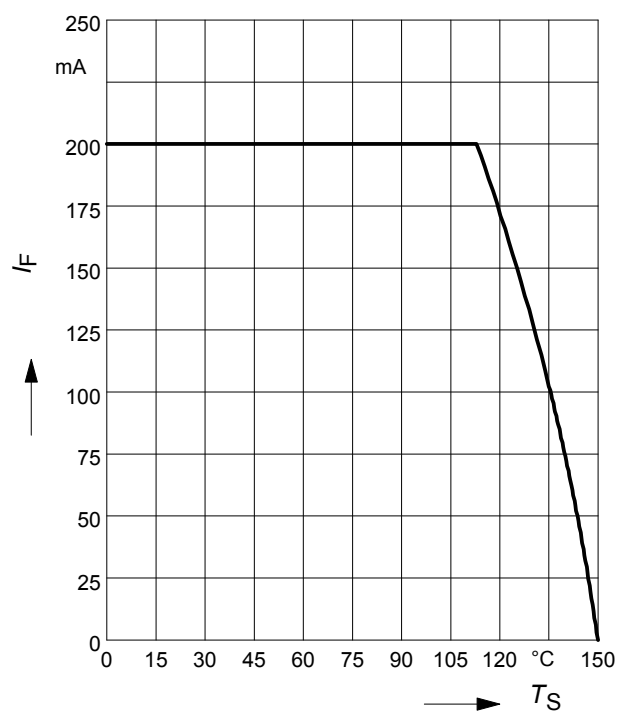

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99

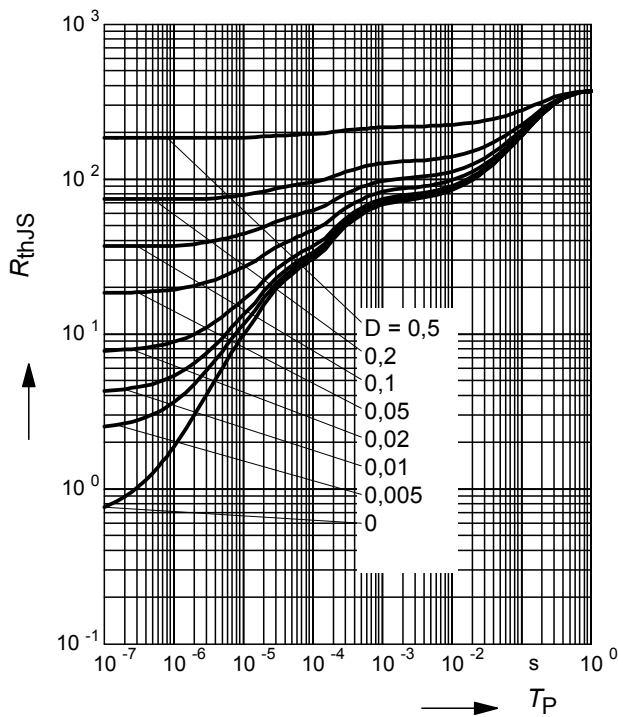

Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99

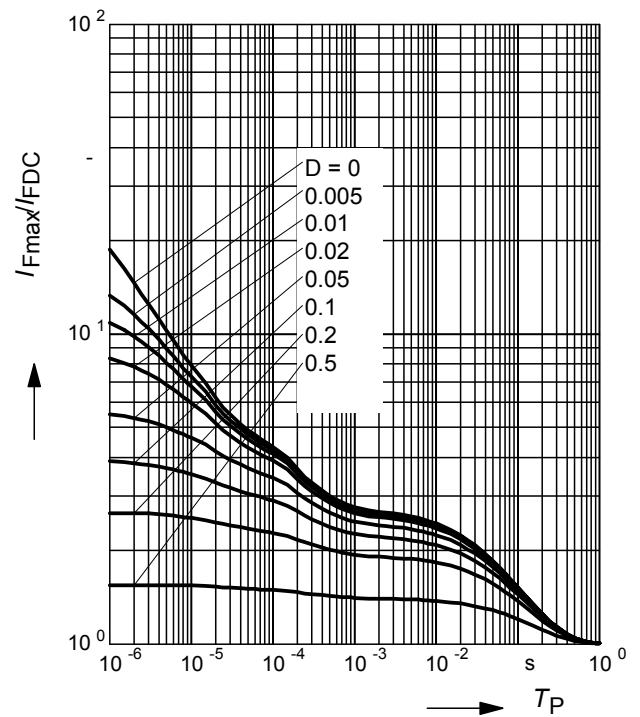

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99S

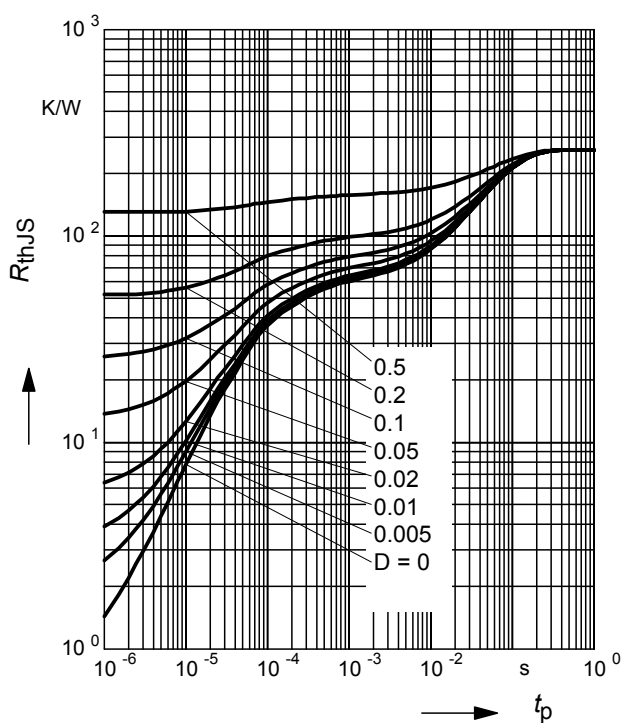

Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99S

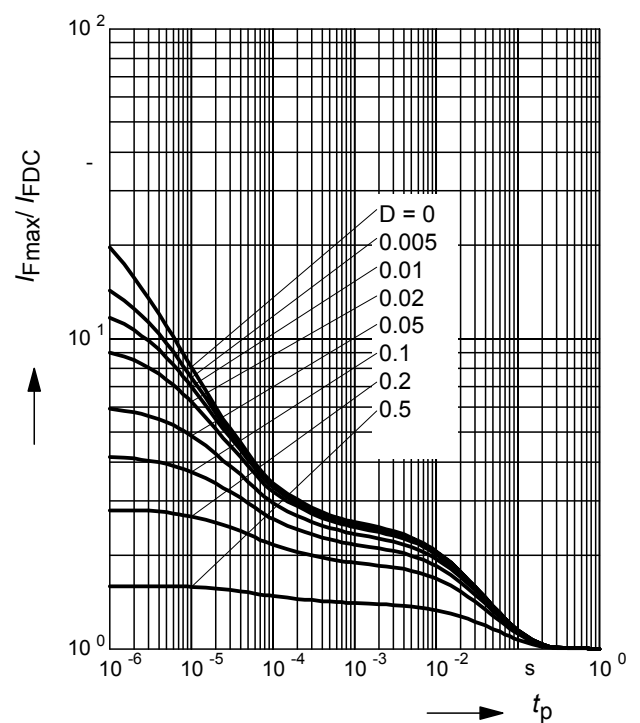

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99T

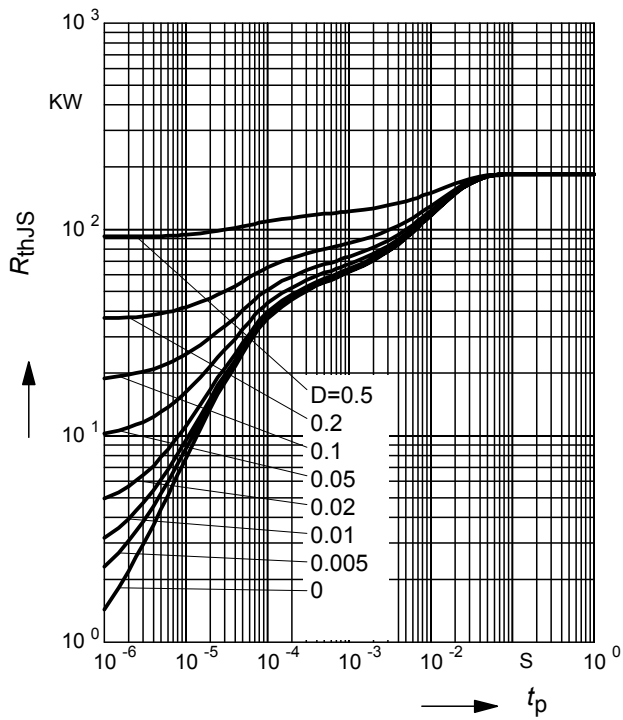

Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99T

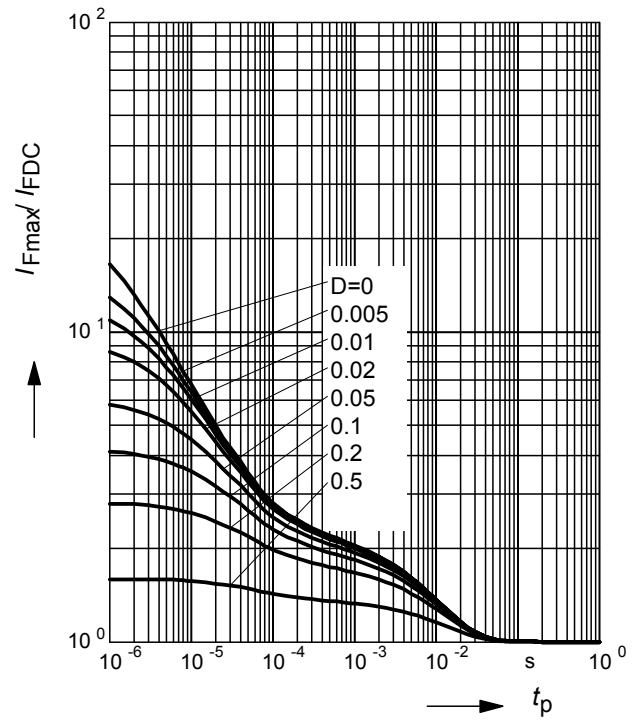

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99U

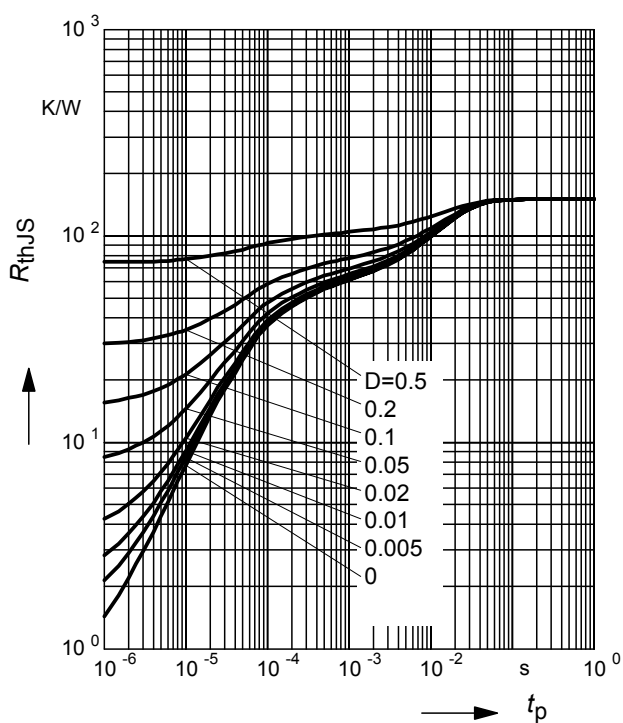

Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99U

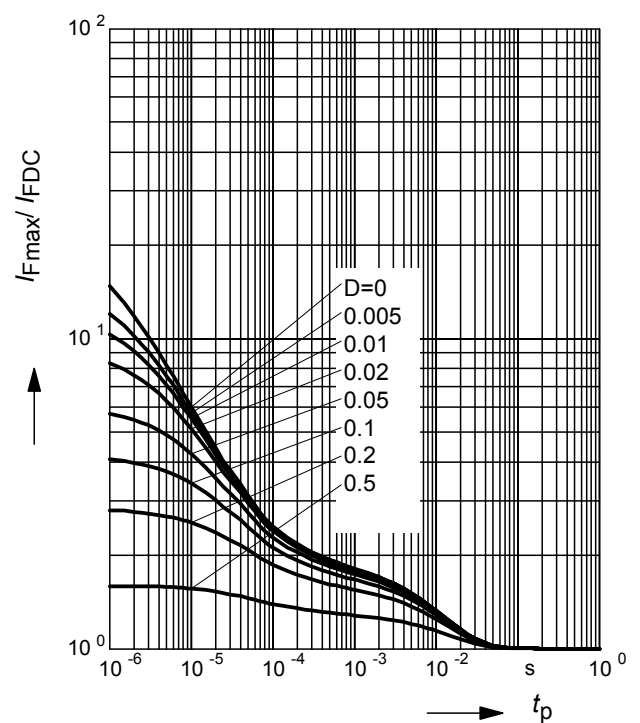

Permissible Puls Load $R_{thJS} = f(t_p)$


BAV99W

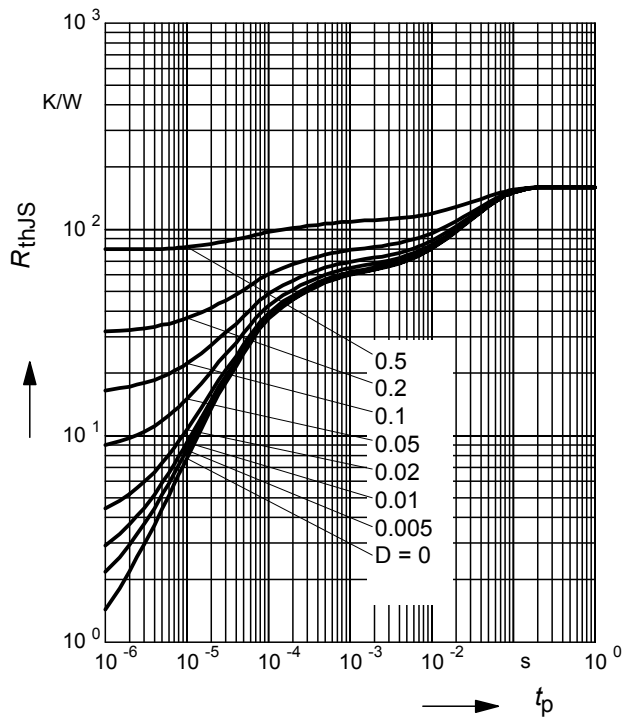

Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAV99W

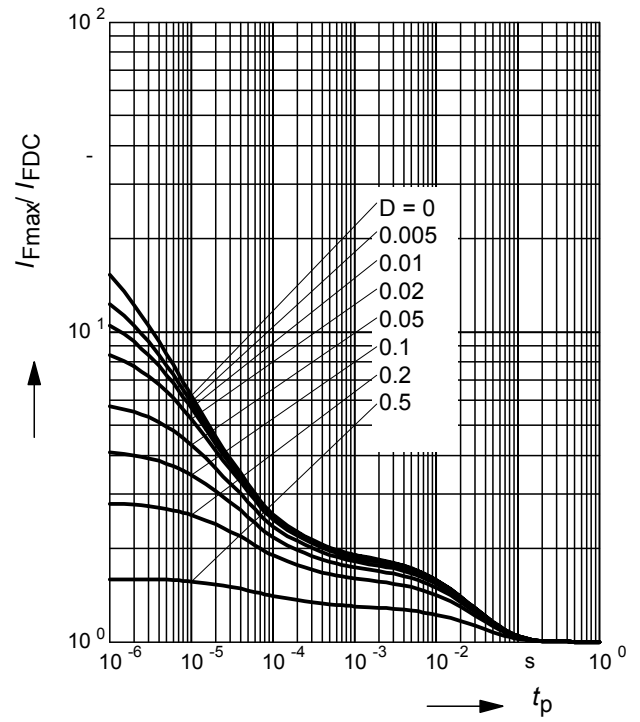

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München**

**© Infineon Technologies AG 2004.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.