





PIN HEADER 2.0mm SMT TYPE PLASTIC HEIGHT 1.5/2.0mm

SPECIFICATION


Current Rate:1 AMP
Insulation Resistance:5000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Polyester,UL 94V-0 ◎Standard:Nylon-6T
H=2.0:P.B.T
Contact Pin:Brass
Finish:Tin,Gold plated ◎Standard:Gold flash all over

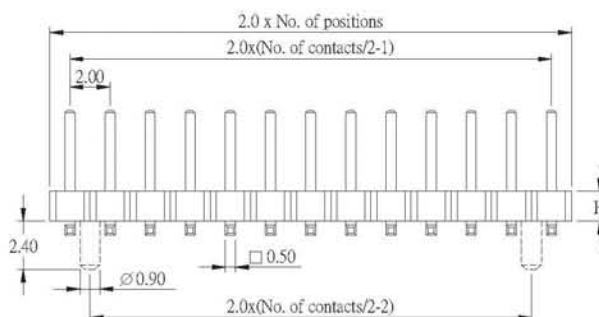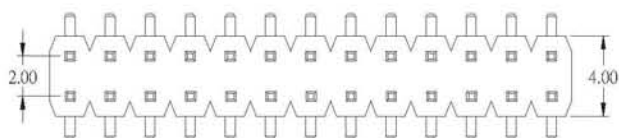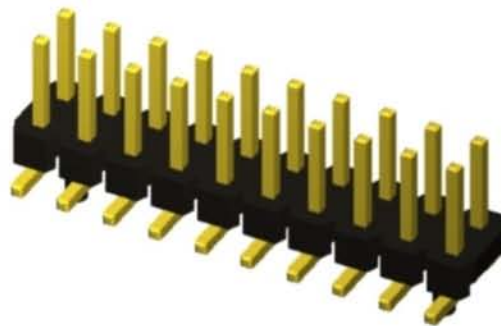


	Code	Dim A	Dim B	Dim C	
				H=1.5	H=2.0
Single row	300	3.00	4.20	2.20	2.70
	400	4.00	4.20		
Dual row	300	3.00	6.20		
	400	4.00	6.20		



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

ORDER INFORMATION

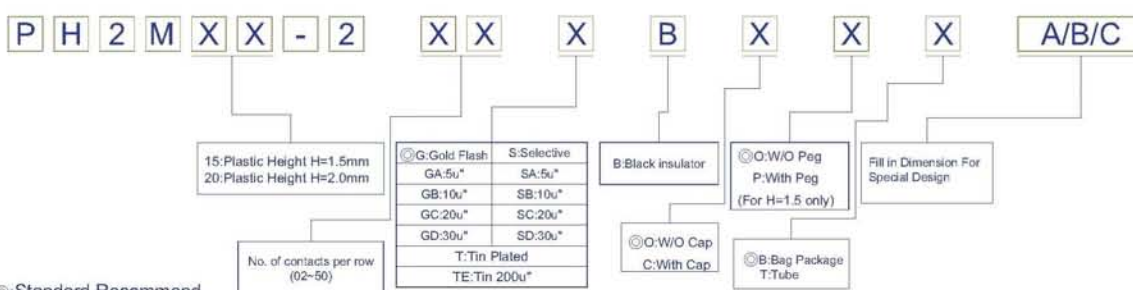

◎: Standard Recommend