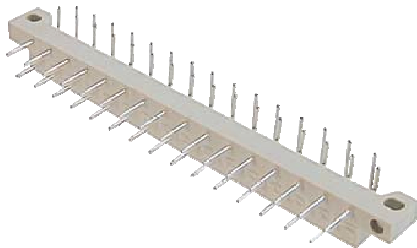


DIN 41617 Stecker, Raster 2.5mm**DIN 41617 Male**, pitch 2.5mm

Isolierkörper
Polycarbonat, UL 94V-1

Kontakte
Cu-Legierung

Strombelastbarkeit
2A (bei +20°C)

Nennspannung
250V AC

Isolationswiderstand
> 10¹⁰ Ω

Prüfspannung
900 V eff
Gütestufe III

Insulator
Polycarbonat, UL94V-1

Contacts
Copper alloy





Current rating
2A (at 20°C)

Voltage rating
250V AC

Insulation resistance
> 10¹⁰ Ω

Test voltage
900 V rms
Quality class III

Dimensions				
No of contacts	A	B	C	D
13	45.6	30	30	40
21	65.6	50	50	60
31	90.6	75	75	85

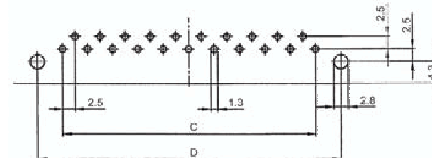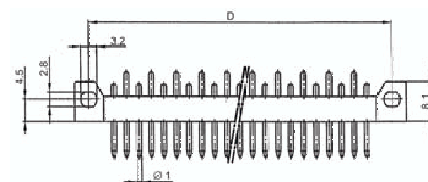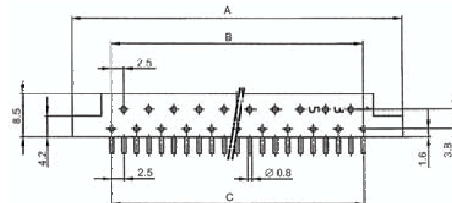

Ordercode : **A - x - S1 / SILVER**
Bestellcode :

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1.

1.

Polzahl
13, 21, 31

No. of contacts
13, 21, 31

Andere Gütestufen und Ausführungen auf
Anfrage

Other quality classes and versions on request

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN41 61x
Hardmetric

Sockets + Strips
Jumper