

PRODUCT NUMBER

71600-YXXL

TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2

OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1

LEFT POLARIZING



CENTRAL KEY




RIGHT POLARIZING

NEW LATCH DESIGN
SEE NOTE 5

NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS
EXAMPLE : 8 POS $N \times 2.54 = 20.32\text{mm}$
- 5 - THE DASH "L" AT THE END OF THE PART NUMBER TO INDICATE A NEW LATCH DESIGN.
"COVER LATCH STYLE" IS THE MANUFACTURER'S OPTION (P/N ENDING WITH OR WITHOUT AN "L").
ORDERS WITH THE "L" DESIGNATION MUST CONTAIN THE NEW LATCH DESIGN.

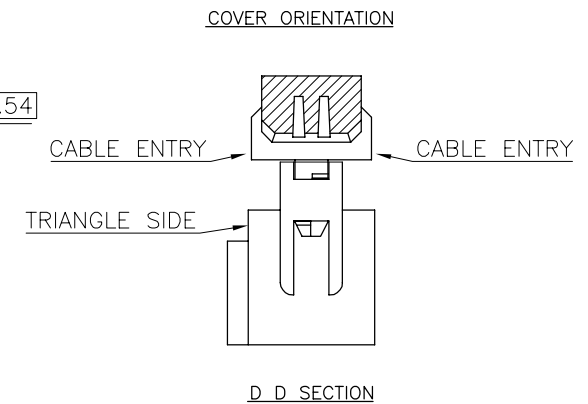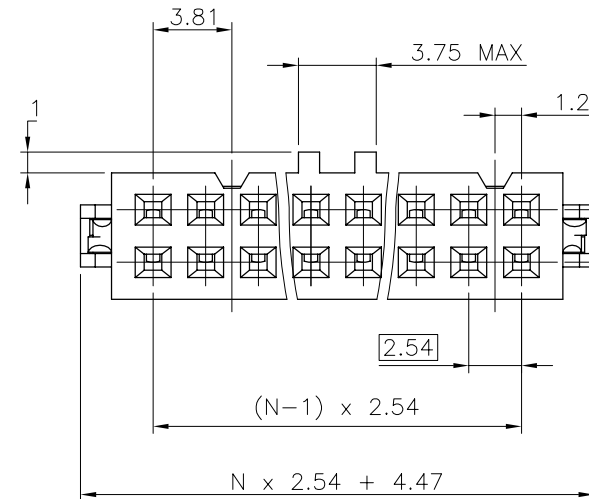

mat'l. code SEE NOTES				tolerances unless otherwise specified				CUSTOMER COPY		 ELECTRONICS www.fciconnect.com	
ltr	ecn no	dr	date	linear				projection 	title		
Y	V91355	DLE	99.06.25						IDC RECEPT.		
AA	F10121	DLE	01.01.24						DR		
AB	F10199	GCO	01.04.26	angles					product family		code
AC	V11866	DLE	01.07.20	dr	D.LE	01.01.24	QUICKIE		213		
AD	V12273	DLE	01.10.24	engr	P.NZ	01.01.24	size				
AE	F03019	DLE	03.01.23	chr	JF.N	01.01.24	dwg no				
				appd	P.NZ	01.01.24	scale 5:1	A3	71600		sheet 1 of 2
sheet index		revision sheet		AE	AB						
		1	2								

PDM: Rev:AE

STATUS:Released

Printed: Jan 25, 2003

Tous droits réservés. Toute réimpression ou utilisation non autorisée sans la permission écrite de la FCI est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la FCI est formellement interdite.



All rights strictly reserved. Reproduction or use in third parties is not permitted without the written authority of FCI. Toute réimpression ou utilisation non autorisée sans la permission écrite de la FCI est formellement interdite.



CORE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT

CATALOGUE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


624

304


204 / 224

004


DASHES NOT
AVAILABLE




WITHOUT STRAIN RELIEF




WITH LOW PROFILE STRAIN RELIEF




WITH STANDARD STRAIN RELIEF




WITH LATCHING STRAIN RELIEF



LOW PROFILE
STRAIN RELIEF






STANDARD
STRAIN RELIEF

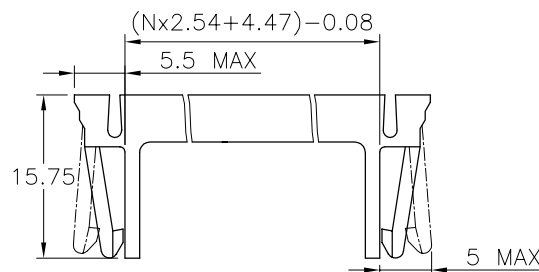

LATCHING STRAIN RELIEF
FOR SLIM HEADER

71600-6YY	●					●
71600-3YY		●	●			
71600-2YY	●				●	
71600-1YY	●			●		
71600-0YY	●		●			
PRODUCT NUMBER	WITH	WITHOUT	STANDARD	WITHOUT	LOW PROFILE	LATCHING
	CENTRAL KEY		STRAIN RELIEF			

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY	 ELECTRONICS www.fciconnect.com
ltr	ecn no	dr	date	linear				
X	F70666	AAN	97.11.05	linear				title
Y	F10121	DLE	01.01.24					
AA	F10199	GCO	01.04.26	angles				product family
AB	F03019	DLE	03.01.23	dr	D.LE	01.01.24		
				engr	P.NZ	01.01.24	code	
				chr	JF.N	01.01.24		size
				appd	P.NZ	01.01.24	dwg no	
								A3
							71600	
sheet index	revision sheet							2 of -