



Features


- 10 pin with 8 resistors in bussed type for pull up/down circuit
- 1206 compact size package
- Convex termination style
- Resistance tolerance $\pm 5\%$
- E12 Series from 100 ohms to 100K ohms
- Suitable for all types of soldering processes
- Paper tape on plastic reel for automatic placement

Model CAY17 - Bussed Resistor Array

Characteristics

Number of Resistors.....8 (bussed circuit)
 Power Rating @ 70°C31 mW
 Operating Temperature Range
-55°C to +125°C
 Derated to 0 Load @+125°C
 Max. Working Voltage25V
 Max. Overload Voltage.....50V
 Resistance Tolerance $\pm 5\%$
 Resistance Range/E12 Series
100 ohms to 100K ohm
 T.C.R. $\pm 250\text{ppm}/^\circ\text{C}$

Construction

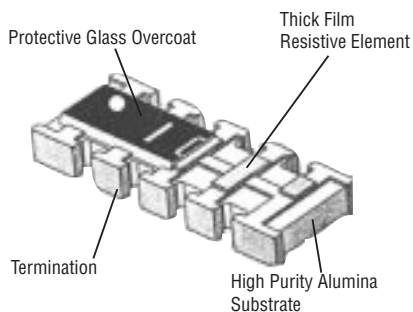


How To Order


CA Y 17 - 103 J A

Chip Arrays _____
 Type _____
 • Y = Convex
 Model _____
 • 17 = 1206 Package Size
 Resistance Code _____
 • 103 = 10K ohms
 Resistance Tolerance _____
 • J = $\pm 5\%$
 Resistors _____
 • A = Common from terminal 5 to 10
 • B = Common from terminal 1 to 6


Product Dimensions

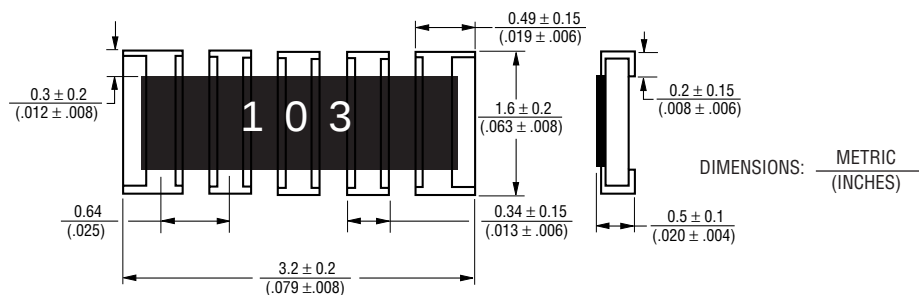

Derating Curve

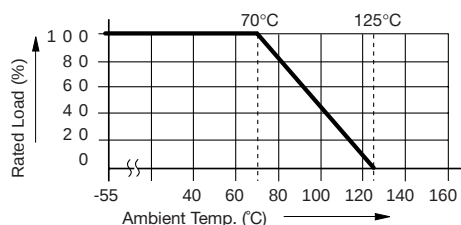

Bussed Circuits - Option A



Packaging Dimensions

