





D-Sub Connector
High Density
Solder pin angled .350"
with metal bracket
threaded insert and clip

(click on the schematic(s) for a more detailed view)

Socket connector

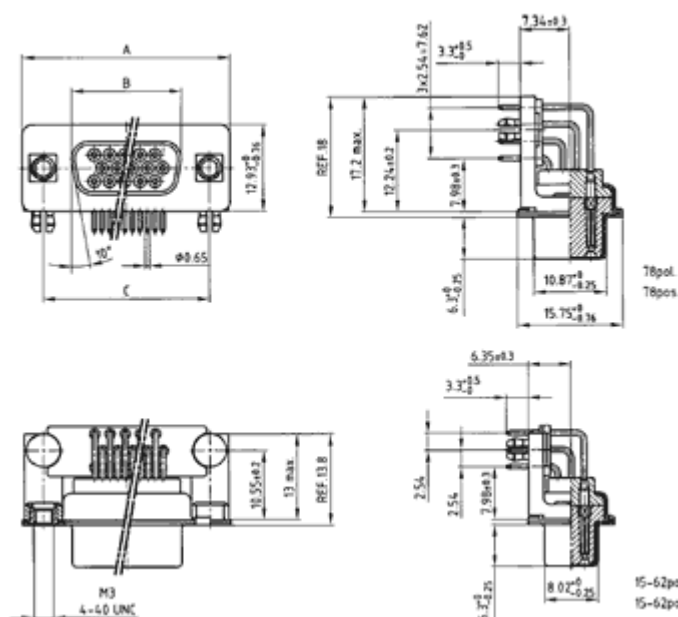

Plug connector

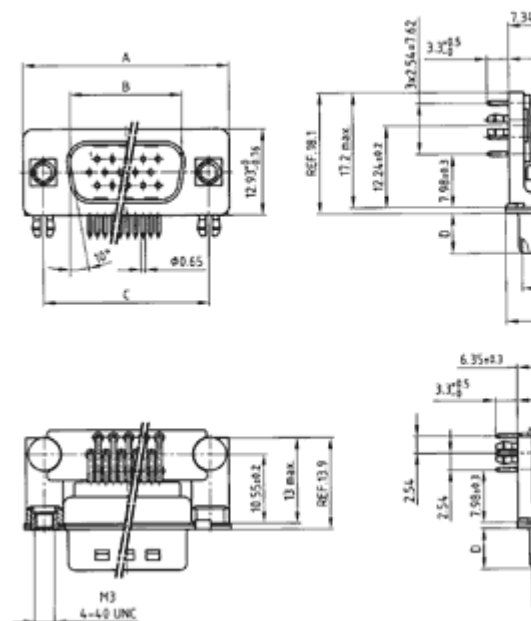

Socket connector:

No. of pos.	A -0,76	B-0,25	
15	31,19	16,46	25,00 ^{+0,12} _{-0,13}
26	39,52	24,79	33,30 ^{+0,15} _{-0,10}
44	53,42	38,50	47,04 ^{±0,13}
62	69,70	54,96	63,50 ^{±0,13}
78	67,31	52,55	61,10 ^{+0,14} _{-0,11}

Plug connector:

No. of pos.	A -0,76	B+0,25	C	
15	31,19	16,79	25,00 ^{+0,12} _{-0,13}	6,12

26	39,52	25,12	33,30 ^{+0,15} _{-0,10}	6,12
44	53,42	38,84	47,04 ^{±0,13}	5,99
62	69,70	55,30	63,50 ^{±0,13}	5,99
78	67,31	52,68	61,10 ^{+0,14} _{-0,11}	5,99

Part Numbers

No.of Pos.	Socket connector tin-plated	
	UNC 4 - 40	M 3
15	164 A 18179 X	164 A 18219 X
26	164 A 18189 X	164 A 18229 X
44	164 A 18199 X	164 A 18239 X
62	164 A 18209 X	164 A 18249 X

No.of Pos.	Plug connector tin-plated with ground indent	
	UNC 4 - 40	M 3
15	163 A 17769 X	163 A 17809 X
26	163 A 17779 X	163 A 17819 X
44	163 A 17789 X	163 A 17829 X
62	163 A 17799 X	163 A 17839 X



REG.-Nr. 40000440



File #: E202784



File #: LR115000

[Back](#)