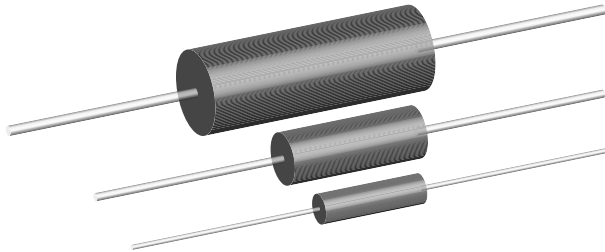


Wirewound Resistors, Precision Power, Low Value, Commercial, Military, MIL-PRF-49465 Type RLV, Axial Lead



FEATURES

- Ideal for all types of current sensing applications including switching and linear power supplies, instruments and power amplifiers
- Proprietary processing technique produces extremely low resistance values
- Excellent load life stability
- Low temperature coefficient
- Low inductance
- Cooler operation for high power to size ratio

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	MIL-PRF-49465 TYPE	POWER RATING $P_{25^{\circ}\text{C}}$ W	RESISTANCE RANGE* Ω $\pm 1\%, \pm 3\%, \pm 5\%, \pm 10\%$	TECHNOLOGY
LVR-1	—	1	0.01 - 0.1**	Metal Strip
LVR-3	—	3	0.005 - 0.2	Metal Strip
LVR-3-26	RLV30 (M4946506)	3	0.01 - 0.2	Metal Strip
LVR-5	—	5	0.005 - 0.3	Metal Strip
LVR-5-26	RLV31 (M4946507)	5	0.01 - 0.3	Metal Strip
LVR-10	—	10	0.01 - 0.8	Coil Spacewound

*Resistance is measured 3/8" [9.52mm] from the body of the resistor, or at 1.183" [30.05mm], 1.315" [33.40mm], 1.675" [42.545mm] or 2.575" [65.405mm] spacing for the LVR-1, LVR-3, LVR-5 and LVR-10 respectively.

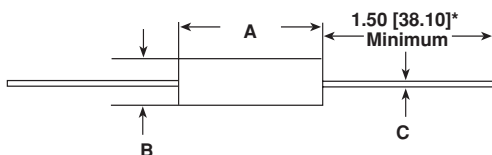
**Standard resistance values are 0.01 Ω , 0.015 Ω , 0.02 Ω , 0.025 Ω , 0.03 Ω , 0.033 Ω , 0.04 Ω , 0.05 Ω , 0.051 Ω , 0.06 Ω , 0.068 Ω , 0.07 Ω , 0.08 Ω , 0.09 Ω and 0.1 Ω with 1% tolerance. Other resistance values may be available upon request.

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	LVR-1	LVR-3	LVR-5	LVR-10
Rated Power at + 25°C	W	1	3	5	10
Operating Temperature Range	°C	- 65/ + 175	- 65/ + 275		
Dielectric Withstanding Voltage	V_{AC}	1000	1000	1000	1000
Insulation Resistance	Ω	10,000 Megohms minimum dry			
Short Time Overload	-	5 x rated power for 5 seconds			10 x rated power for 5 seconds
Terminal Strength (minimum)	lb	5	10	10	10
Temperature Coefficient	ppm/°C	See TC vs Resistance Value Chart			
Maximum Working Voltage	V	$(P \times R)^{1/2}$			
Weight (maximum)	g	2	2	5	11

ORDERING INFORMATION

LVR-3 MODEL	0.05 Ω RESISTANCE Ω	1.0% TOLERANCE $\pm \%$
----------------	---	-------------------------------

**DIMENSIONS**

*On some standard reel pack methods, the leads may be trimmed to a shorter length than shown.

MODEL	DIMENSIONS in inches [millimeters]		
	A ± 0.010 [0.254]	B ± 0.010 [0.254]	C ± 0.002 [0.051]
LVR-1	0.427 [10.85]	0.115 [2.92]	0.020 [0.508]
LVR-3	0.560 [14.22]	0.205 [5.21]	0.032 [0.813]
LVR-5	0.925 [23.50]	0.330 [8.38]	0.040 [1.02]
LVR-10	1.828 [46.43]	0.392 [9.96]	0.040 [1.02]

MATERIAL SPECIFICATIONS

Element: Self-supporting nickel-chrome alloy

(LVR-10 also utilizes manganin)

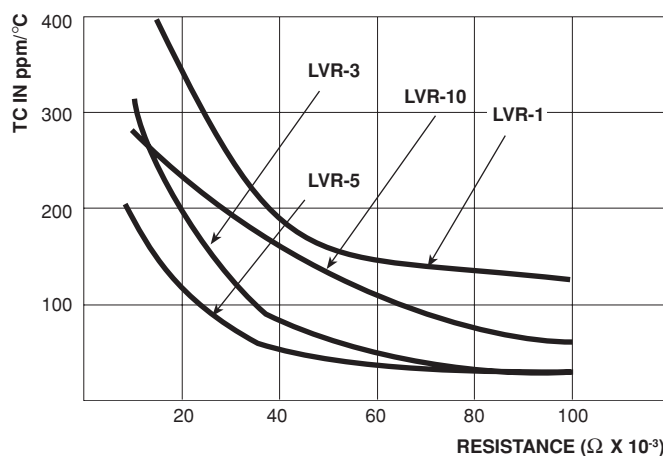
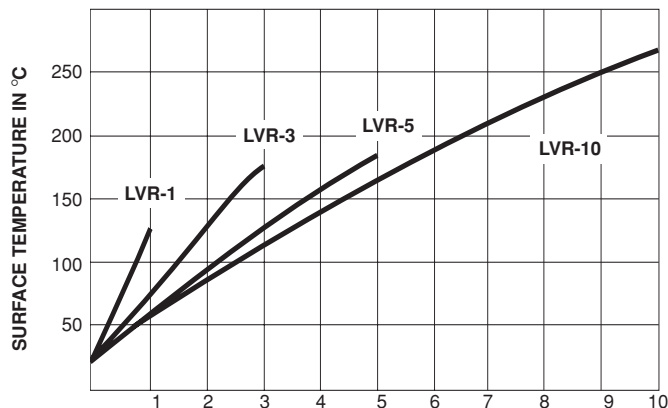
Encapsulation: High temperature mold compound

Terminals: Tinned copper

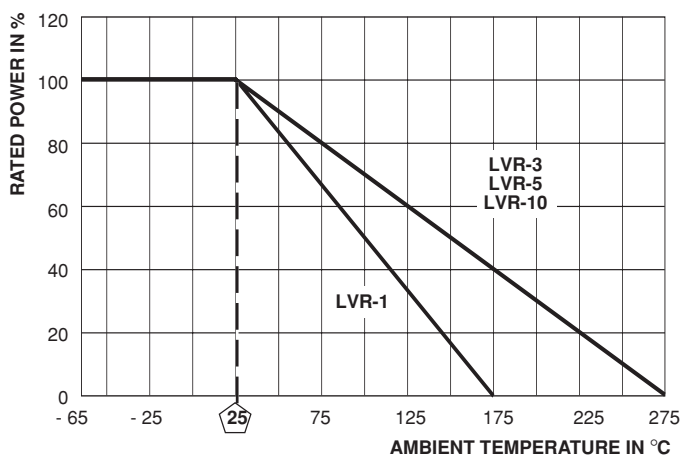
Part Marking: DALE, Model, Wattage, Value, Tolerance,

Date Code

The improved TC characteristics of these LVR models from -55°C to +125°C (referenced to +25°C) are as follows:

**TC vs Resistance Value****Surface Temperature vs Power**

POWER IN W

**Derating**

PERFORMANCE		
TEST	CONDITIONS OF TEST (MIL-PRF-49465)	TEST LIMITS
Thermal Shock	-65°C to +125°C, 5 cycles, 15 minutes at each extreme	± (0.2% + 0.0005Ω)ΔR
Short Time Overload	5 x rated power (LVR-1, -3, -5), 10 x rated power (LVR-10) for 5 seconds	± (0.5% + 0.0005Ω)ΔR
Low Temperature Storage	-65°C for 24 hours	± (0.2% + 0.0005Ω)ΔR
High Temperature Exposure	250 hours at +275°C (+175°C for LVR-1)	± (2.0% + 0.0005Ω)ΔR
Dielectric Withstanding Voltage	1000V rms, one minute	± (0.1% + 0.0005Ω)ΔR
Insulation Resistance	MIL-STD-202 Method 302, 100 volts	1000 MΩ minimum
Moisture Resistance	MIL-STD-202 Method 106, 7b not applicable	± (0.2% + 0.0005Ω)ΔR
Shock, Specified Pulse	MIL-STD-202 Method 213, 100g's for 6 milliseconds, 10 shocks	± (0.1% + 0.0005Ω)ΔR
Vibration, High Frequency	Frequency varied 10 to 2000Hz, 20g peak, 2 directions 6 hours each	± (0.1% + 0.0005Ω)ΔR
Load Life	2000 hours at rated power, +25°C, 1.5 hours "ON", 0.5 hours "OFF"	± (2.0% + 0.0005Ω)ΔR
Solderability	ANSI J-STD-002	95% coverage
Bias Humidity	+85°C, 85% RH, 10% bias, 1000 hours	± (1.0% + 0.0005Ω)ΔR