

Card accessories

Elma Ergonomic

IEEE hot-swap injector/ejector handle

Scope of delivery

- Handle grey, button red (plastic, UL94V-0)
Handle black, button red (plastic, UL94V-0)
- Card holder (zinc die-cast, galvanized)
- Fixing material (screws M2.5 for fixing of card holder/printed board)

Top handle *with* ESD pin



Color	1 piece	100 pcs.
grey	81-097	81-097-2
black	81-095	81-095-2

Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Top handle *without* ESD pin



Color	1 piece	100 pcs.
grey	81-097-01	81-097-01-2
black	81-095-01	81-095-01-2

Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Bottom handle *with* ESD pin



Color	1 piece	100 pcs.
grey	81-098	81-098-2
black	81-096	81-096-2

Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Bottom handle *without* ESD pin



Color	1 piece	100 pcs.
grey	81-098-01	81-098-01-2
black	81-096-01	81-096-01-2



Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Microswitch to injector/ejector handle



Description	10 pcs.	100 pcs.
Microswitch with pre-assembled wire cable lenght (25 mm)	81-088-1	81-088-2
Microswitch with pre-assembled wire cable lenght (70 mm)	on request	on request

Assembly instruction

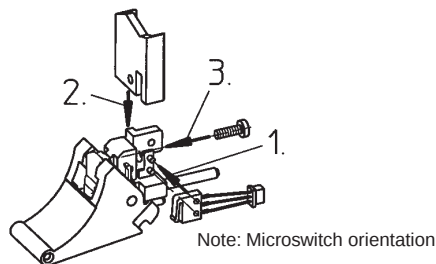

Technical data

Life circuit:	30 V DC, 5-50 mA	30 000 cycles
	60 V DC, 5 mA	30 000 cycles
	60 V DC, 500 mA	15 000 cycles
Temperature:	- 25°C to +70°C	
Humidity:	RF 85% max.	
Vibration:	10 Hz to 55 Hz, 18 g	
Shock:	30 g, 11 msec	

Elma Ergonomic IEEE hot-swap injector/ejector handle

Offset version

- Offset by 2.54 mm ($\frac{1}{2}$ HP) to the right
- Thus giving more space on the solder side of the printed board

Scope of delivery

- Offset handle grey, button red (plastic, UL94V-0)
Offset handle black, button red (plastic, UL94V-0)
- Card holder (zinc die-cast, galvanized)
- Fixing material (screws M2.5 for fixing of card holder/printed board)

Offset top handle *with* ESD pin



Color	1 piece	100 pcs.
grey, offset	81-182	81-182-2
black, offset	81-184	81-184-2

Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Offset bottom handle *with* ESD pin



Color	1 piece	100 pcs.
grey, offset	81-183	81-183-2
black, offset	81-185	81-185-2

Optional: screws for fixing front panels M2.5/100 pcs.: 1904-41

Microswitch to injector/ejector handle, see page 126.