
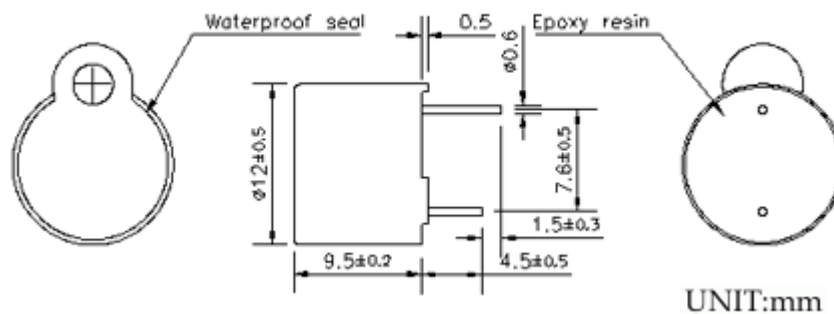


HITPOINT INC.**Electro**
[Top Page](#) | [Company files](#) | [Hot News](#) | [Products](#) | [Sales](#)
[Buzzer](#) | [Receiver](#) | [Mini Speaker](#) | [Mini Microphone](#) |
Pin Type**PB-12N23P-01 , 03 , 05 , 09 , 12****Dimensions and material****Electrical Characteristics**

Model Number	PB-12N23P-01	PB-12N23P-03	PB-12N23P-05	PB-12N23P-09	PB-12N23P-12
Resonant Frequency	2.3 $\pm$ 0.4				
Operating Voltage	1.25~2.5	2.0~5.0	4.5~5.5	7.0~11	9.0~15
Rated Voltage	1.5	3.0	5.0	9.0	12
Sound Pressure Level(Min)	80	85	85	85	85
Current Consumption(Max)	25	30	50	50	50
Tone	Constant				
Operating Temperature	-20 $\pm$ +70				
Storage Temperature	-30 $\pm$ +80				

Voltage/Current/Sound Pressure

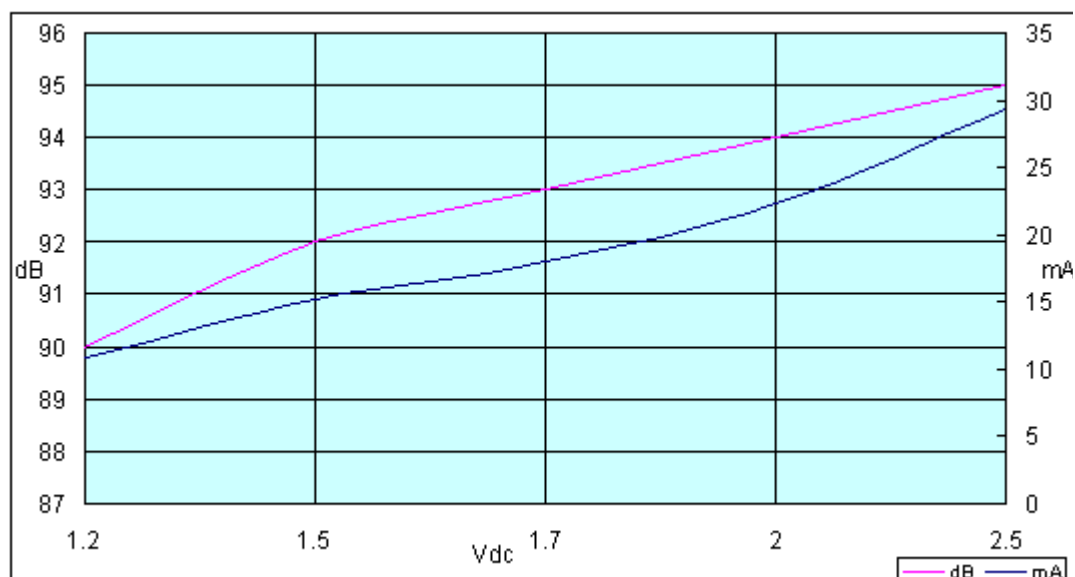

This site is best viewed with monitor resolution equal or higher than 1024x768.
If you have any question or suggestion, please email to hitpoint@hitpoint.com.tw
Copyright HITPOINT INC. All rights reserved 2002