

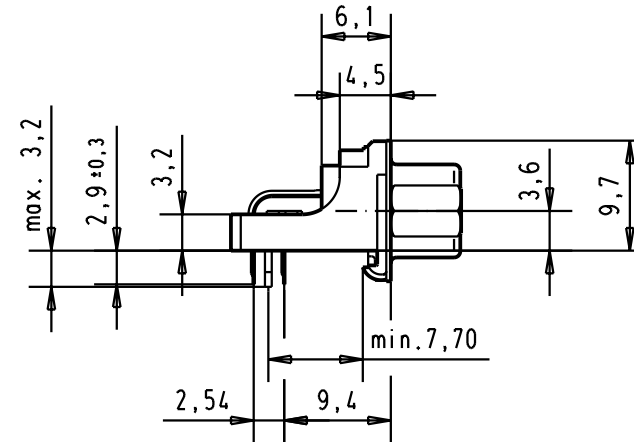
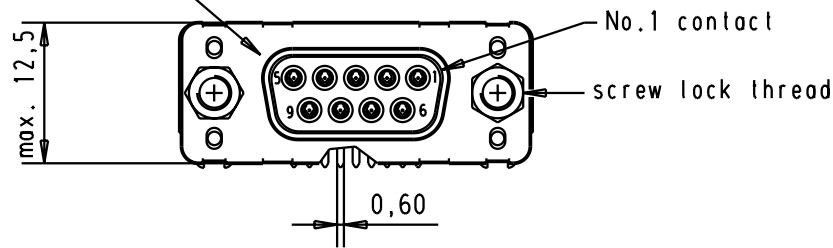


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

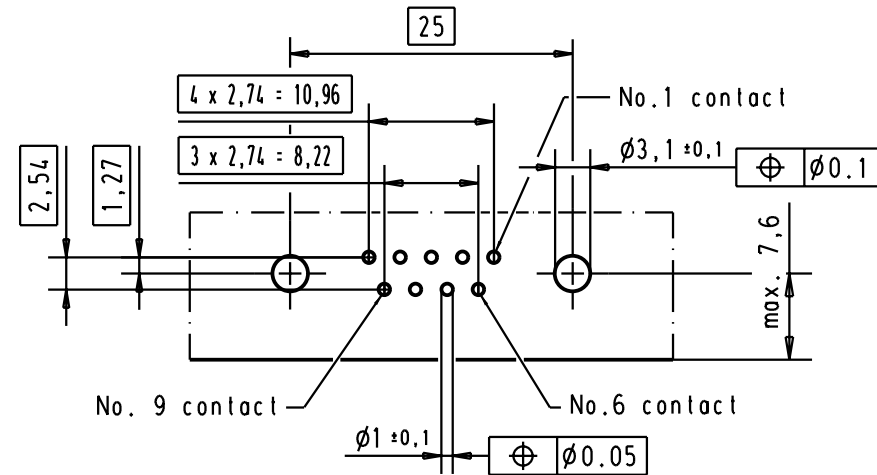

PCB layout hole  
component side

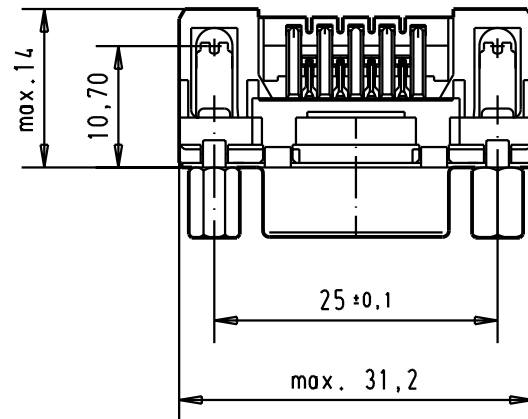

Connector retention and insertion forces on the PCB = 25 / 80 newtons

|                |                |                   |                   |            |           |         |                               |      |                                                                                                                               |                                                                                             |                                |  |
|----------------|----------------|-------------------|-------------------|------------|-----------|---------|-------------------------------|------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------|--|
| A              |                |                   |                   |            |           |         | Det.                          | Name | <br>All Dim. in mm<br>Orig. Size DIN A 4 | D-Sub 09 poles low profil angle female,solder pin with screw lock and grounding board lock. | Maßstab/<br>Scale<br><br>1.5:1 |  |
|                |                |                   |                   |            |           | Detail. | 02/sept/00                    | jfb  |                                                                                                                               |                                                                                             |                                |  |
|                |                |                   |                   | 31084      | 04/SEP/02 | YT      | Insp.                         |      |                                                                                                                               |                                                                                             |                                |  |
|                | 09 66 152 6617 | 4-40 UNC          | 2                 | 27961      | 24/nov/00 | jfb     | Stand.                        |      |                                                                                                                               |                                                                                             |                                |  |
|                | 09 66 152 7617 | 4-40 UNC          | 3                 | 27952      | 26/oct/00 | jfb     | HARTING EURL<br>F-95972 Paris |      |                                                                                                                               | TB 0966152x61x                                                                              | Blatt/ Page<br><br>3 / 5       |  |
| 09 66 152 5617 | 4-40 UNC       | 0.76 µm Au        | 27948             | 02/sept/00 | jfb       |         |                               |      |                                                                                                                               |                                                                                             |                                |  |
|                | Part number    | Screw lock thread | Performance level | Mod.       | Det.      | Name    |                               |      |                                                                                                                               | Sub.                                                                                        |                                |  |