

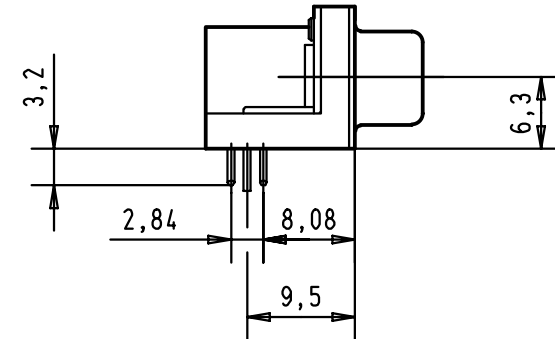
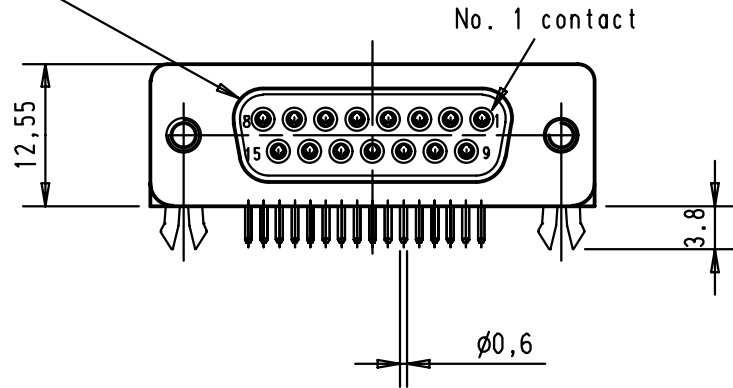


Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

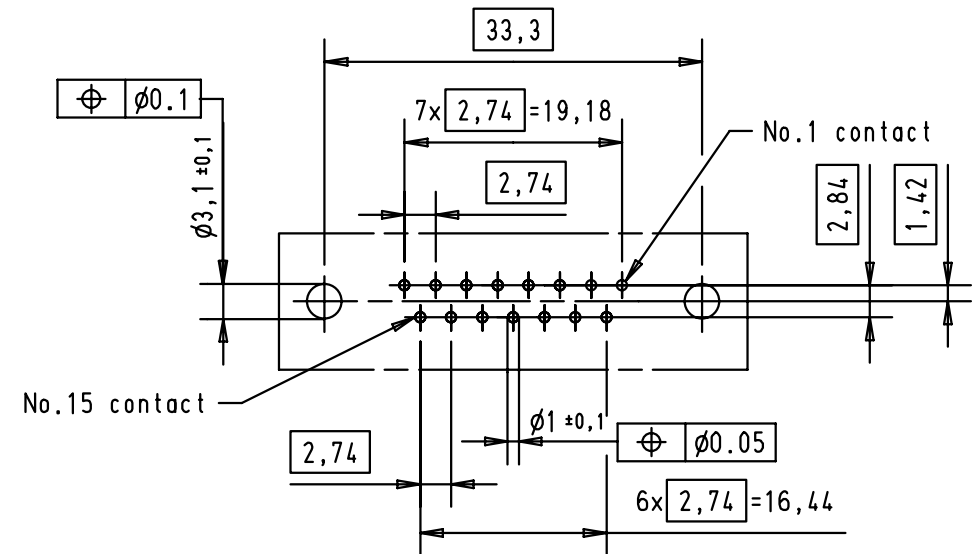

Printed board layout (1,6 $\pm$ 0,2 thick)
View component side

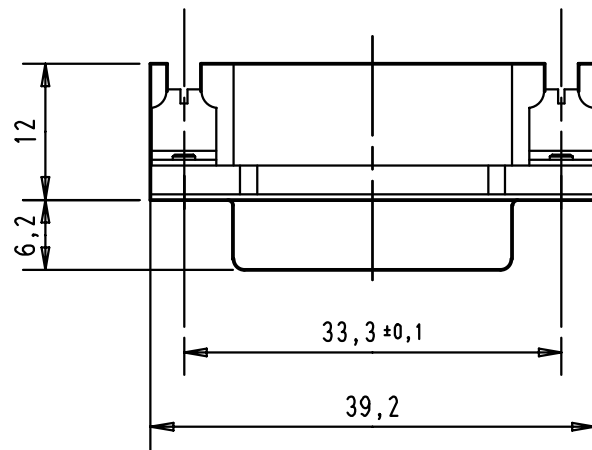

Connector insertion force on PCB = maxi 80 N

A							Detail.	Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub female connector, US Footprint, 15 poles with solder pins,nuts and grounding board lock	Maßstab/ Scale 1,5:1
	09 68 253 7611	M3	3				Insp.					
	09 68 253 5611	M3	0,76 µm Au				Stand.					
	09 68 253 7612	4-40 UNC	3				HARTING EURL F-95972 Paris				TB 09 68 253 X61X	Blatt/ Page 1
	09 68 253 5612	4-40 UNC	0,76 µm Au	29751	28-FEB-01	CV						
	Part number	nut thread	Performance level	Mod.	Dat.	Name						