



| HOME |

BH

connector

Low profile connectors with high withstanding voltage, designed for connecting liquid crystal display back light lamps to their starters.

*SMT configuration



*Its crimp style contact can be inserted into the housing with little force, thus making them suitable for use with flexible wires such as those insulated with silicone rubber.

4.0 / 8.0 / 12.0mm
pitch

Lead-Free/RoHS
Information



eRoHS.pdf

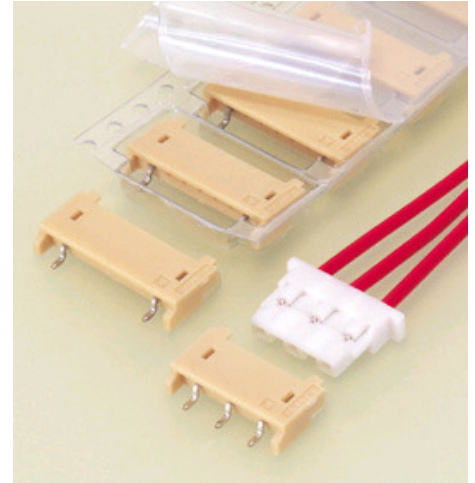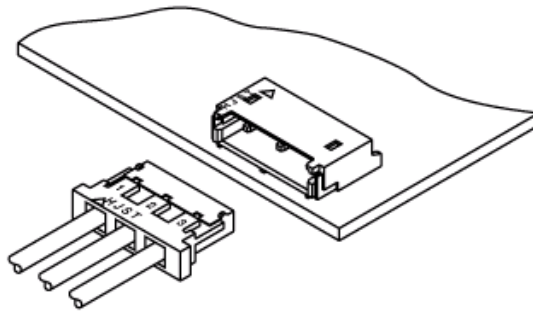

Specifications

Further Information



eBH.pdf

Current rating: 1.0A AC, DC(AWG#22)

Voltage rating: 600V AC, DC

Available number of circuits: SMT type/2, 3, 4, 5

Dip type/2

PC board mounting direction: Side entry

Copyright (C) 2005 J.S.T. Mfg. Co., Ltd. All Rights Reserved.