

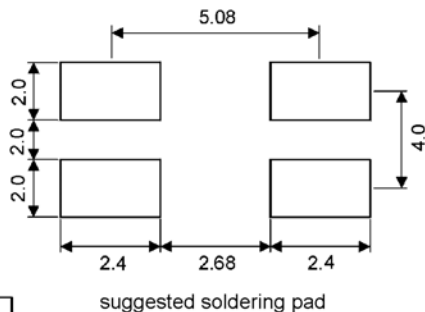


QUARTZ CRYSTALS

MHz range

SMD-version

model	KX - 20
frequency	6,0 MHz
mode	fundamental
operating temperature	-20° ~ + 70°C
frequency tolerance at +25°C	± 50 ppm
temperature tolerance at -20° ~ + 70°C	± 50 ppm
capacity load C_L	16 pF
series resonance R_1 max.	80 Ohm
aging (first year)	± 5 ppm
shunt capacitance C_0 max.	7,0 pF
drive level in mW	0,1
contents of reel	2000 pcs.
lead-free	yes
order no.	12.87522

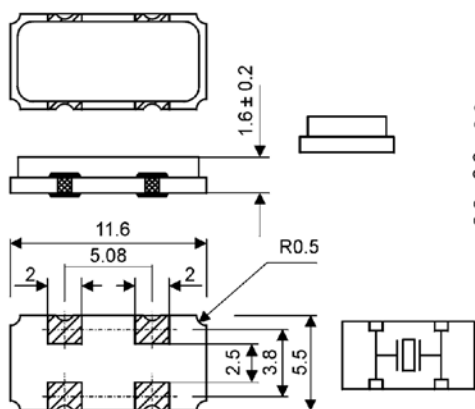

soldering condition

