


2.5mm Density 2-piece Connector Plug

CP-M60 Series

FEATURES

1. The insulator, material is of heat-and chemical-resistance PBT resin (black) approved under UL-94V-0.
2. Contact is solder plated.
Gold plating is also available if desired.
3. Polarization device is designed in.
4. The terminals, protected by the surrounding insulator housing, are well protected from violent vibration and shock.
5. The style are straight and angle types.
Terminals are for solder-dip.
6. CP-M60 Series have a device to prevent flux from rising when soldered. The formed contact pins at both sides enables the connectors to be in place during the soldering operation.

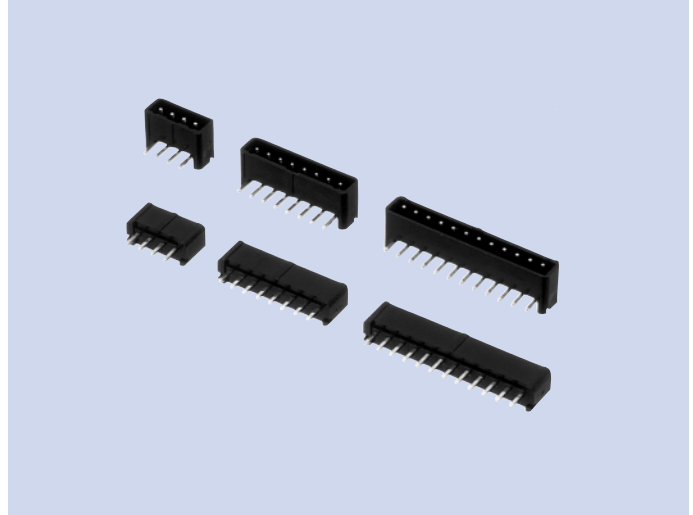


HOW TO ORDER

M60-08-30-1 1 4 P
 1 2 3 4


- 1 Series No.
- 2 No. of contacts
- 3 Contact tail style
1 : Straight
3 : Angle
- 4 Contact finish
4 : Solder plating
0 : Gold plating

DIMENSIONS

Straight plug

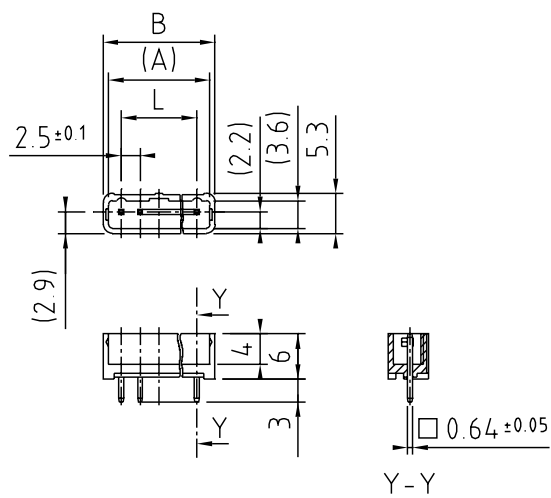

Angle plug

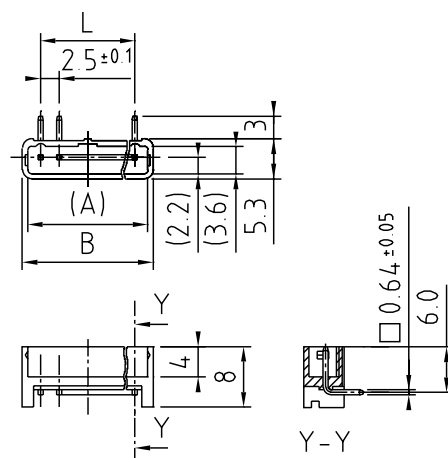

Unit : mm
Tolerance : ±0.3mm

No. of Contacts	Measurement		
	L	A	B
2	2.5	5.7	7.3
3	5.0	8.4	9.8
4	7.5	10.9	12.3
5	10.0	13.4	14.8
6	12.5	15.9	17.3
7	15.0	18.4	19.8
8	17.5	20.9	22.3
9	20.0	23.4	24.8
10	22.5	25.9	27.3
11	25.0	28.4	29.8
12	27.5	30.9	32.3
13	30.0	33.4	34.8
14	32.5	35.9	37.3
15	35.0	38.4	39.8