

8

7



6

5

4

3

2

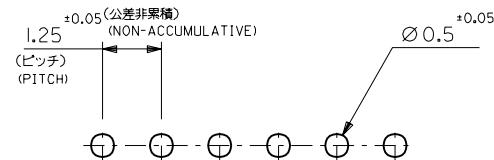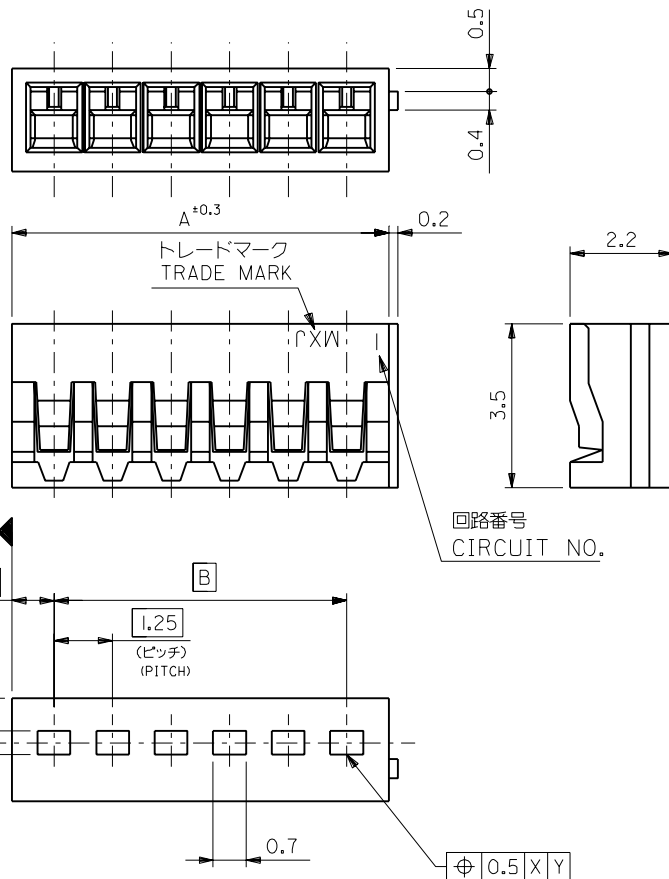


基板取付穴推奨寸法 (t=0.8)
RECOMMENDED P.C.BOARD HOLE DIM.(t=0.8)

適合ターミナル 
APPLICABLE TERMINAL 

注記
NOTE

△ 適合ターミナル : 50061-8*00
50080-8*00
△ APPLICABLE TERMINAL : 50061-8*00
50080-8*00

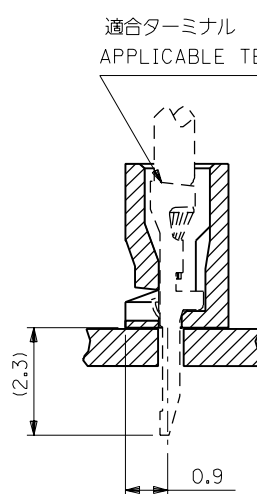

17.5	19.3	51022-1500	15
16.25	18.05	▲ -1400	14
15	16.8	-1300	13
13.75	15.55	-1200	12
12.5	14.3	-1100	11
11.25	13.05	-1000	10
10	11.8	-0900	9
8.75	10.55	-0800	8
7.5	9.3	-0700	7
6.25	8.05	-0600	6
5	6.8	-0500	5
3.75	5.55	-0400	4
2.5	4.3	▼ -0300	3
1.25	3.05	51022-0200	2
B	A	ENG. NO.	検査 C.K.T.NO.

						材料 MATERIAL ポリエステル、UL94V-0 POLYESTER,UL94V-0	
						仕上げ FINISH	—H—
角度 ANGLE	±3°					適用電線範囲 WIRE RANGE	—H—
30以上 OVER	±0.3					被覆外径 INS. RANGE	—H—
10以上 30未満 OVER UNDER	±0.25						
10未満 UNDER	±0.2	C	再作図 REDRAWN	(JC70313)	h.t	DRAWN BY '96/05/29 H.TUJIMA	CHK'D BY '96/05/29 M.FUKUSHIMA
一般公差 TOLERANCES	記号 T.R	変更内容 REVISION RECORD	DR.	CHK	日付 DATE	APP'D BY '96/05/29 M.FENOMOTO	尺度 SCALE 10: 1



MOLEX-JAPAN CO., LTD.
日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

1.25 BOARD IN
CONN. HOUSING

DWG. NO.	SD-51022-**-00
----------	----------------

RE	
C	

