

FEATURES AND SPECIFICATIONS

Features and Benefits

- Four grounding contacts on metal shell for EMI leakage protection
- Dual pair boardlocks and straight tabs for robust PCB retention
- Staked housing provides excellent solder-tail alignment facilitating PCB mounting
- Housing stand-offs for anti-solder bridging
- Housing available in black or white

Reference Information

Product Specification: PS-67998-0000

Packaging: Tray

Mates With: USB 'B' Plug

Designed In: Millimeters

Electrical

Voltage: 30V

Current: 1.0A

Contact Resistance: 30mΩ max.

Dielectric Withstanding Voltage: 750V AC

Insulation Resistance: 1000 MΩ min.

Mechanical

Mating Force: 35N max.

Unmating Force: 10N min.

Durability: 1500 cycles

Physical

Housing: Black or white, glass fiber-filled polyester, UL 94V-0

Contact: Phosphor Bronze

Metal Shell: Copper Alloy

Plating: Gold Flash or 30μ" Gold


Operating Temperature: 0 to +40°C







Universal Serial Bus Shielded I/O Type 'B' Receptacle

67265

Vertical With Paired Boardlocks and Grounding Pins



CATALOG DRAWING (FOR REFERENCE ONLY)

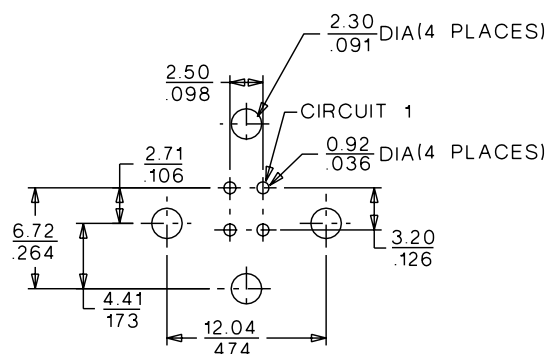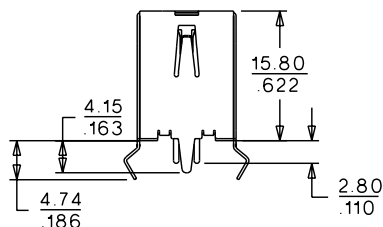

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: $\frac{1.60}{.063}$

ORDERING INFORMATION

Circuits	Order No.		Plating
	Black	White	
4	67265-0000	67265-1000	Gold Flash
	67265-0001	67265-1001	30μ" Gold