
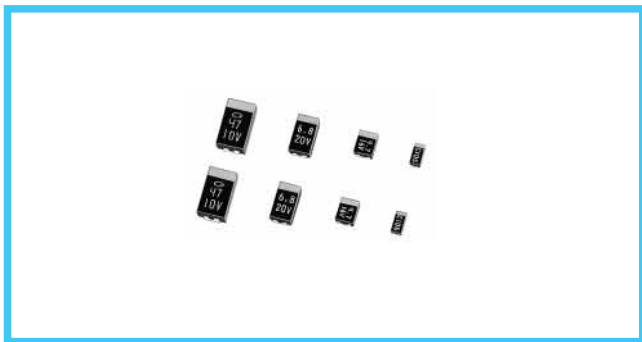


**F93**Resin-molded Chip,  
Standard Series


For SMD

Eco-Products  
(Pb-free)

## ■ Type numbering system (Example: 10V 10μF)

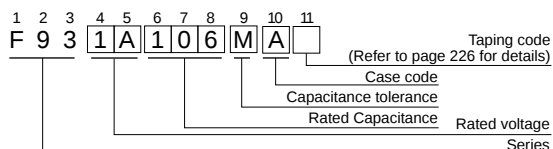


## ■ Drawing

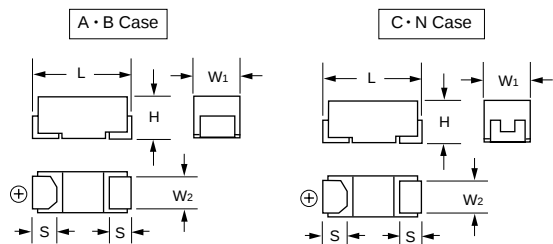

## ■ Dimensions

| Case code | L         | W <sub>1</sub> | W <sub>2</sub> | H         | S         |
|-----------|-----------|----------------|----------------|-----------|-----------|
| A         | 3.2 ± 0.2 | 1.6 ± 0.2      | 1.2 ± 0.1      | 1.6 ± 0.2 | 0.8 ± 0.2 |
| B         | 3.5 ± 0.2 | 2.8 ± 0.2      | 2.2 ± 0.1      | 1.9 ± 0.2 | 0.8 ± 0.2 |
| C         | 6.0 ± 0.2 | 3.2 ± 0.2      | 2.2 ± 0.1      | 2.5 ± 0.2 | 1.3 ± 0.2 |
| N         | 7.3 ± 0.2 | 4.3 ± 0.2      | 2.4 ± 0.1      | 2.8 ± 0.2 | 1.3 ± 0.2 |

## ■ Marking

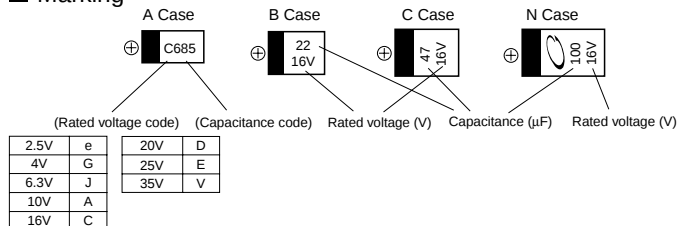

## ■ Standard ratings

| Cap. (μF) | V   | 2.5   | 4     | 6.3         | 10        | 16          | 20      | 25      | 35      |
|-----------|-----|-------|-------|-------------|-----------|-------------|---------|---------|---------|
| Code      |     | 0E    | 0G    | 0J          | 1A        | 1C          | 1D      | 1E      | 1V      |
| 0.47      | 474 |       |       |             |           |             |         |         | A       |
| 0.68      | 684 |       |       |             |           |             |         |         | A       |
| 1         | 105 |       |       |             |           | A           | A       | A       | A       |
| 1.5       | 155 |       |       |             |           | A           | A       | A       | A       |
| 2.2       | 225 |       |       | A           | A         | A           | A       | A       | A · B   |
| 3.3       | 335 |       |       | A           | A         | A           | A       | A · B   | B       |
| 4.7       | 475 |       | A     | A           | A         | A           | A · B   | A · B   | (B) · C |
| 6.8       | 685 |       | A     | A           | A         | A · B       | A · B   | C       | C       |
| 10        | 106 |       | A     | A           | A · B     | A · B       | A · B   | C       | C       |
| 15        | 156 |       | A     | A · B       | A · B     | A · B       | C       | C       | N       |
| 22        | 226 |       | A · B | A · B       | A · B     | (A) · B · C | (B) · C | (C) · N | N       |
| 33        | 336 |       | A · B | A · B       | A · B · C | B · C       | C · N   | N       |         |
| 47        | 476 | A     | A · B | A · B       | B · C     | C · N       | N       | N       |         |
| 68        | 686 | A     | A · B | B · C       | C · N     | N           | (N)     |         |         |
| 100       | 107 | B     | A · B | (A) · B · C | C · N     | (C) · N     |         |         |         |
| 150       | 157 | B     | B     | B · C       | C · N     |             |         |         |         |
| 220       | 227 | B     | B · C | C · N       | N         |             |         |         |         |
| 330       | 337 | C     | C · N | N           | N         |             |         |         |         |
| 470       | 477 | C · N | N     | N           |           |             |         |         |         |
| 680       | 687 |       | N     |             |           |             |         |         |         |

( ) The series in parentheses are being developed.

Please contact to your local Nichicon sales office when these series are being designed in your application.

CAT.8100T

## ■ Specifications

| Item                              | Performance Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category                          | –55 ~ +125°C (Rated temperature : 85°C)                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Temperature Range                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Capacitance Tolerance             | ±20%, ±10% (at 120Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Dissipation Factor (120Hz)        | Refer to P.231                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| E.S.R. (100kHz)                   | Refer to P.231                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Leakage Current                   | <ul style="list-style-type: none"> <li>After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater.</li> <li>After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5μA, whichever is greater.</li> <li>After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater.</li> </ul> |
| Capacitance Change by Temperature | +15% Max. (at +125°C)<br>+10% Max. (at +85°C)<br>–10% Max. (at –55°C)                                                                                                                                                                                                                                                                                                                                                                                             |
| Damp Heat (No voltage applied)    | At 40°C 90 ~ 95% R.H. 500 hours<br>Capacitance Change Within ±10% of initial value<br>Dissipation Factor.....Initial specified value or less<br>Leakage Current.....Initial specified value or less                                                                                                                                                                                                                                                               |
| Temperature Cycles                | –55°C / +125°C 30 minutes each 5 cycles<br>Capacitance Change Within ±5% of initial value<br>Dissipation Factor.....Initial specified value or less<br>Leakage Current.....Initial specified value or less                                                                                                                                                                                                                                                        |
| Resistance to Soldering Heat      | Test condition:<br>10 seconds reflow at 260°C, 5 seconds immersion at 260°C<br>Capacitance Change Within ±5% of initial value<br>Dissipation Factor.....Initial specified value or less<br>Leakage Current.....Initial specified value or less                                                                                                                                                                                                                    |
| Surge*                            | After application of surge voltage in series with a 33Ω resistor at the rate of 30 seconds ON, seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below.<br>Capacitance Change.....Within ±5% of initial value<br>Dissipation Factor.....Initial specified value or less<br>Leakage Current.....Initial specified value or less                                                                        |
| Endurance*                        | After 2000 hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors meet the characteristic requirements listed below.<br>Capacitance Change.....Within ±10% of initial value<br>Dissipation Factor.....Initial specified value or less<br>Leakage Current.....Initial specified value or less                                                                              |
| Shear Test                        | After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, neither exfoliation nor its sign shall be found at the terminal electrode.                      5N (0.51kg · f)<br>For 10±1seconds                                                                                                                                    |
| Terminal Strength                 | Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure load is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.                      R230<br>20<br>45 45<br>1mm            |

\* As for the surge and derated voltage at 125°C, refer to page 225 for details.

**F93**

## ■ Standard ratings

| Rated Volt | Rated Capacitance (μF) | Case code | Part Number | Leakage Current (μA) | Dissipation Factor (%@120Hz) | E.S.R. (Ω@100kHz) |
|------------|------------------------|-----------|-------------|----------------------|------------------------------|-------------------|
| 2.5V       | 47                     | A         | F930E476MAA | 1.2                  | 12                           | 2.5               |
|            | 68                     | A         | F930E686MAA | 1.7                  | 18                           | 2.5               |
|            | 100                    | B         | F930E107MBA | 2.5                  | 14                           | 0.9               |
|            | 150                    | B         | F930E157MBA | 3.8                  | 14                           | 0.7               |
|            | 220                    | B         | F930E227MBA | 5.5                  | 18                           | 0.7               |
|            | 330                    | C         | F930E337MCC | 8.3                  | 16                           | 0.7               |
|            | 470                    | C         | F930E477MCC | 11.8                 | 18                           | 0.5               |
|            | 470                    | N         | F930E477MNC | 11.8                 | 12                           | 0.3               |
| 4V         | 4.7                    | A         | F930G475MAA | 0.5                  | 6                            | 4.0               |
|            | 6.8                    | A         | F930G685MAA | 0.5                  | 6                            | 3.5               |
|            | 10                     | A         | F930G106MAA | 0.5                  | 6                            | 3.0               |
|            | 15                     | A         | F930G156MAA | 0.6                  | 6                            | 2.9               |
|            | 22                     | A         | F930G226MAA | 0.9                  | 8                            | 2.5               |
|            | 22                     | B         | F930G226MBA | 0.9                  | 6                            | 1.9               |
|            | 33                     | A         | F930G336MAA | 1.3                  | 8                            | 2.5               |
|            | 33                     | B         | F930G336MBA | 1.3                  | 6                            | 1.4               |
|            | 47                     | A         | F930G476MAA | 1.9                  | 18                           | 2.5               |
|            | 47                     | B         | F930G476MBA | 1.9                  | 8                            | 1.0               |
|            | 68                     | A         | F930G686MAA | 2.7                  | 24                           | 2.5               |
|            | 68                     | B         | F930G686MBA | 2.7                  | 8                            | 0.8               |
|            | 100                    | A         | F930G107MAA | 4.0                  | 30                           | 2.0               |
|            | 100                    | B         | F930G107MBA | 4.0                  | 14                           | 0.9               |
|            | 150                    | B         | F930G157MBA | 6.0                  | 16                           | 0.7               |
|            | 220                    | B         | F930G227MBA | 8.8                  | 18                           | 0.7               |
|            | 220                    | C         | F930G227MCC | 8.8                  | 12                           | 0.7               |
|            | 330                    | C         | F930G337MCC | 13.2                 | 14                           | 0.7               |
|            | 330                    | N         | F930G337MNC | 13.2                 | 10                           | 0.5               |
|            | 470                    | N         | F930G477MNC | 18.8                 | 16                           | 0.3               |
|            | 680                    | N         | F930G687MNC | 27.2                 | 18                           | 0.3               |
| 6.3V       | 2.2                    | A         | F930J225MAA | 0.5                  | 6                            | 5.0               |
|            | 3.3                    | A         | F930J335MAA | 0.5                  | 6                            | 4.5               |
|            | 4.7                    | A         | F930J475MAA | 0.5                  | 6                            | 4.0               |
|            | 6.8                    | A         | F930J685MAA | 0.5                  | 6                            | 3.5               |
|            | 10                     | A         | F930J106MAA | 0.6                  | 6                            | 3.0               |
|            | 15                     | A         | F930J156MAA | 0.9                  | 8                            | 2.9               |
|            | 15                     | B         | F930J156MBA | 0.9                  | 6                            | 2.0               |
|            | 22                     | A         | F930J226MAA | 1.4                  | 8                            | 2.5               |
|            | 22                     | B         | F930J226MBA | 1.4                  | 6                            | 1.9               |
|            | 33                     | A         | F930J336MAA | 2.1                  | 8                            | 2.5               |
|            | 33                     | B         | F930J336MBA | 2.1                  | 8                            | 1.4               |
|            | 47                     | A         | F930J476MAA | 3.0                  | 18                           | 2.5               |
|            | 47                     | B         | F930J476MBA | 3.0                  | 8                            | 1.0               |
|            | 68                     | B         | F930J686MBA | 4.3                  | 8                            | 1.0               |
|            | 68                     | C         | F930J686MCC | 4.3                  | 8                            | 0.8               |
|            | 100                    | B         | F930J107MBA | 6.3                  | 14                           | 0.9               |
|            | 100                    | C         | F930J107MCC | 6.3                  | 10                           | 0.7               |
|            | 150                    | B         | F930J157MBA | 9.5                  | 18                           | 0.9               |
|            | 150                    | C         | F930J157MCC | 9.5                  | 12                           | 0.7               |
|            | 220                    | C         | F930J227MCC | 13.9                 | 14                           | 0.7               |
|            | 220                    | N         | F930J227MNC | 13.9                 | 10                           | 0.5               |
|            | 330                    | N         | F930J337MNC | 20.8                 | 14                           | 0.5               |
|            | 470                    | N         | F930J477MNC | 29.6                 | 16                           | 0.3               |
| 10V        | 2.2                    | A         | F931A225MAA | 0.5                  | 6                            | 5.0               |
|            | 3.3                    | A         | F931A335MAA | 0.5                  | 6                            | 4.5               |
|            | 4.7                    | A         | F931A475MAA | 0.5                  | 6                            | 4.0               |
|            | 6.8                    | A         | F931A685MAA | 0.7                  | 6                            | 3.5               |
|            | 10                     | A         | F931A106MAA | 1.0                  | 6                            | 3.0               |
|            | 10                     | B         | F931A106MBA | 1.0                  | 6                            | 2.1               |
|            | 15                     | A         | F931A156MAA | 1.5                  | 8                            | 2.9               |
|            | 15                     | B         | F931A156MBA | 1.5                  | 6                            | 2.0               |
|            | 22                     | A         | F931A226MAA | 2.2                  | 12                           | 2.5               |
|            | 22                     | B         | F931A226MBA | 2.2                  | 8                            | 1.9               |
|            | 33                     | A         | F931A336MAA | 3.3                  | 18                           | 2.5               |
|            | 33                     | B         | F931A336MBA | 3.3                  | 8                            | 1.4               |
|            | 33                     | C         | F931A336MCC | 3.3                  | 6                            | 1.1               |
|            | 47                     | B         | F931A476MBA | 4.7                  | 8                            | 1.0               |
|            | 47                     | C         | F931A476MCC | 4.7                  | 8                            | 0.9               |
|            | 68                     | C         | F931A686MCC | 6.8                  | 8                            | 0.8               |
|            | 68                     | N         | F931A686MNC | 6.8                  | 6                            | 0.6               |
|            | 100                    | C         | F931A107MCC | 10.0                 | 10                           | 0.7               |
|            | 100                    | N         | F931A107MNC | 10.0                 | 10                           | 0.6               |
|            | 150                    | C         | F931A157MCC | 15.0                 | 14                           | 0.7               |
|            | 150                    | N         | F931A157MNC | 15.0                 | 10                           | 0.6               |
|            | 220                    | N         | F931A227MNC | 22.0                 | 12                           | 0.5               |
|            | 330                    | N         | F931A337MNC | 33.0                 | 18                           | 0.5               |
| 16V        | 1                      | A         | F931C105MAA | 0.5                  | 4                            | 7.5               |
|            | 1.5                    | A         | F931C155MAA | 0.5                  | 6                            | 6.0               |
|            | 2.2                    | A         | F931C225MAA | 0.5                  | 6                            | 5.0               |
|            | 3.3                    | A         | F931C335MAA | 0.5                  | 6                            | 4.5               |
|            | 4.7                    | A         | F931C475MAA | 0.8                  | 6                            | 4.0               |
|            | 6.8                    | A         | F931C685MAA | 1.1                  | 6                            | 3.5               |
|            | 6.8                    | B         | F931C685MBA | 1.1                  | 6                            | 2.5               |
|            | 10                     | A         | F931C106MAA | 1.6                  | 6                            | 3.0               |
|            | 10                     | B         | F931C106MBA | 1.6                  | 6                            | 2.0               |
|            | 15                     | A         | F931C156MAA | 2.4                  | 10                           | 3.0               |
|            | 15                     | B         | F931C156MBA | 2.4                  | 8                            | 2.0               |
|            | 22                     | B         | F931C226MBA | 3.5                  | 8                            | 1.9               |
|            | 22                     | C         | F931C226MCC | 3.5                  | 6                            | 1.1               |
|            | 33                     | B         | F931C336MBA | 5.3                  | 8                            | 1.9               |
|            | 33                     | C         | F931C336MCC | 5.3                  | 8                            | 1.1               |
|            | 47                     | C         | F931C476MCC | 7.5                  | 8                            | 0.9               |
| 20V        | 47                     | N         | F931C476MNC | 7.5                  | 6                            | 0.7               |
|            | 68                     | N         | F931C686MNC | 10.9                 | 8                            | 0.6               |
|            | 100                    | N         | F931C107MNC | 16.0                 | 10                           | 0.6               |
|            | 1                      | A         | F931D105MAA | 0.5                  | 4                            | 7.5               |
|            | 1.5                    | A         | F931D155MAA | 0.5                  | 6                            | 6.3               |
|            | 2.2                    | A         | F931D225MAA | 0.5                  | 6                            | 5.0               |
|            | 3.3                    | A         | F931D335MAA | 0.7                  | 6                            | 4.5               |
|            | 4.7                    | A         | F931D475MAA | 0.9                  | 6                            | 4.0               |
|            | 4.7                    | B         | F931D475MBA | 0.9                  | 6                            | 2.8               |
|            | 6.8                    | A         | F931D685MAA | 1.4                  | 6                            | 3.5               |
|            | 6.8                    | B         | F931D685MBA | 1.4                  | 6                            | 2.5               |
|            | 10                     | A         | F931D106MAA | 2.0                  | 8                            | 3.5               |
|            | 10                     | B         | F931D106MBA | 2.0                  | 6                            | 2.1               |
|            | 15                     | C         | F931D156MCC | 3.0                  | 6                            | 1.2               |
|            | 22                     | C         | F931D226MCC | 4.4                  | 8                            | 1.1               |
|            | 33                     | C         | F931D336MCC | 6.6                  | 8                            | 1.1               |
| 25V        | 33                     | N         | F931D336MNC | 6.6                  | 6                            | 0.7               |
|            | 47                     | N         | F931D476MNC | 9.4                  | 8                            | 0.7               |
|            | 0.68                   | A         | F931E684MAA | 0.5                  | 4                            | 7.6               |
|            | 1                      | A         | F931E105MAA | 0.5                  | 4                            | 7.5               |
|            | 1.5                    | A         | F931E155MAA | 0.5                  | 6                            | 6.7               |
|            | 2.2                    | A         | F931E225MAA | 0.6                  | 6                            | 6.3               |
|            | 3.3                    | A         | F931E335MAA | 0.8                  | 6                            | 6.0               |
|            | 3.3                    | B         | F931E335MBA | 0.8                  | 6                            | 3.1               |
|            | 4.7                    | A         | F931E475MAA | 1.2                  | 8                            | 4.0               |
|            | 4.7                    | B         | F931E475MBA | 1.2                  | 6                            | 2.8               |
|            | 6.8                    | C         | F931E685MCC | 1.7                  | 6                            | 1.8               |
|            | 10                     | C         | F931E106MCC | 2.5                  | 6                            | 1.5               |
|            | 15                     | C         | F931E156MCC | 3.8                  | 8                            | 1.2               |
|            | 22                     | N         | F931E226MNC | 5.5                  | 6                            | 0.7               |
|            | 33                     | N         | F931E336MNC | 8.3                  | 8                            | 0.7               |
|            | 47                     | N         | F931E476MNC | 11.8                 | 8                            | 0.7               |
| 35V        | 0.47                   | A         | F931V474MAA | 0.5                  | 4                            | 10.0              |
|            | 0.68                   | A         | F931V684MAA | 0.5                  | 4                            | 7.6               |
|            | 1                      | A         | F931V105MAA | 0.5                  | 4                            | 7.5               |
|            | 1.5                    | A         | F931V155MAA | 0.5                  | 6                            | 7.5               |
|            | 2.2                    | A         | F931V225MAA | 0.8                  | 6                            | 7.0               |
|            | 2.2                    | B         | F931V225MBA | 0.8                  | 6                            | 3.8               |
|            | 3.3                    | B         | F931V335MBA | 1.2                  | 6                            | 3.5               |
|            | 4.7                    | C         | F931V475MCC | 1.6                  | 6                            | 1.8               |
|            | 6.8                    | C         | F931V685MCC | 2.4                  | 6                            | 1.8               |
|            | 10                     | C         | F931V106MCC | 3.5                  | 6                            | 1.6               |
|            | 15                     | N         | F931V156MNC | 5.3                  | 6                            | 0.7               |
|            | 22                     | N         | F931V226MNC | 7.7                  | 8                            | 0.7               |

※ In case of capacitance tolerance ±10% type, [K] will be put at 9th digit of type numbering system.