

CAT. NO. & DIMENSIONS

NO. OF CONTACTS	STRAIGHT TYPE CAT. NO.	RIGHT ANGLE TYPE CAT. NO.	DIMENSIONS(NOTE1)	
			A ± 0.3	B ± 0.1
4	SLP 4S - 5	SLP 4R - 5	11.15	6.45
5	SLP 5S - 5	SLP 5R - 5	12.40	7.70
6	SLP 6S - 5	SLP 6R - 5	13.65	8.95
7	SLP 7S - 5	SLP 7R - 5	14.90	10.20
8	SLP 8S - 5	SLP 8R - 5	16.15	11.45
9	SLP 9S - 5	SLP 9R - 5	17.40	12.70
10	SLP 10S - 5	SLP 10R - 5	18.65	13.95
11	SLP 11S - 5	SLP 11R - 5	19.90	15.20
12	SLP 12S - 5	SLP 12R - 5	21.15	16.45
13	SLP 13S - 5	SLP 13R - 5	22.40	17.70
14	SLP 14S - 5	SLP 14R - 5	23.65	18.95
15	SLP 15S - 5	SLP 15R - 5	24.90	20.20
16	SLP 16S - 5	SLP 16R - 5	26.15	21.45
17	SLP 17S - 5	SLP 17R - 5	27.40	22.70
18	SLP 18S - 5	SLP 18R - 5	28.65	23.95
19	SLP 19S - 5	SLP 19R - 5	29.90	25.20
20	SLP 20S - 5	SLP 20R - 5	31.15	26.45

CAT. NO.


SERIES NAME _____
 NO. OF CONTACTS _____
 S : STRAIGHT TYPE
 R : RIGHT ANGLE TYPE
 VARIATION _____

SLP (n) S - 5

NOTES

1) SEE PART DRAWINGS FOR DIMENSIONS A & B

				SCALE	$\times$	CAT. NO. TABLE FOR LOW PROFILE ZIFLOK	
				DIM. IN	mm	CAT. NO.	
1	'94 8-29	REDRAWN	mont 5.9	DESIGNED		SLP__R/S - 5	
REV.	DATE	DESCRIPTION	CKD.	DRAWN		DRAWING NO.	REV.
				CHECKED		JSA 28897	1
MATERIAL				APPROVED			
				DATE			
				Aug. 29, 1994			

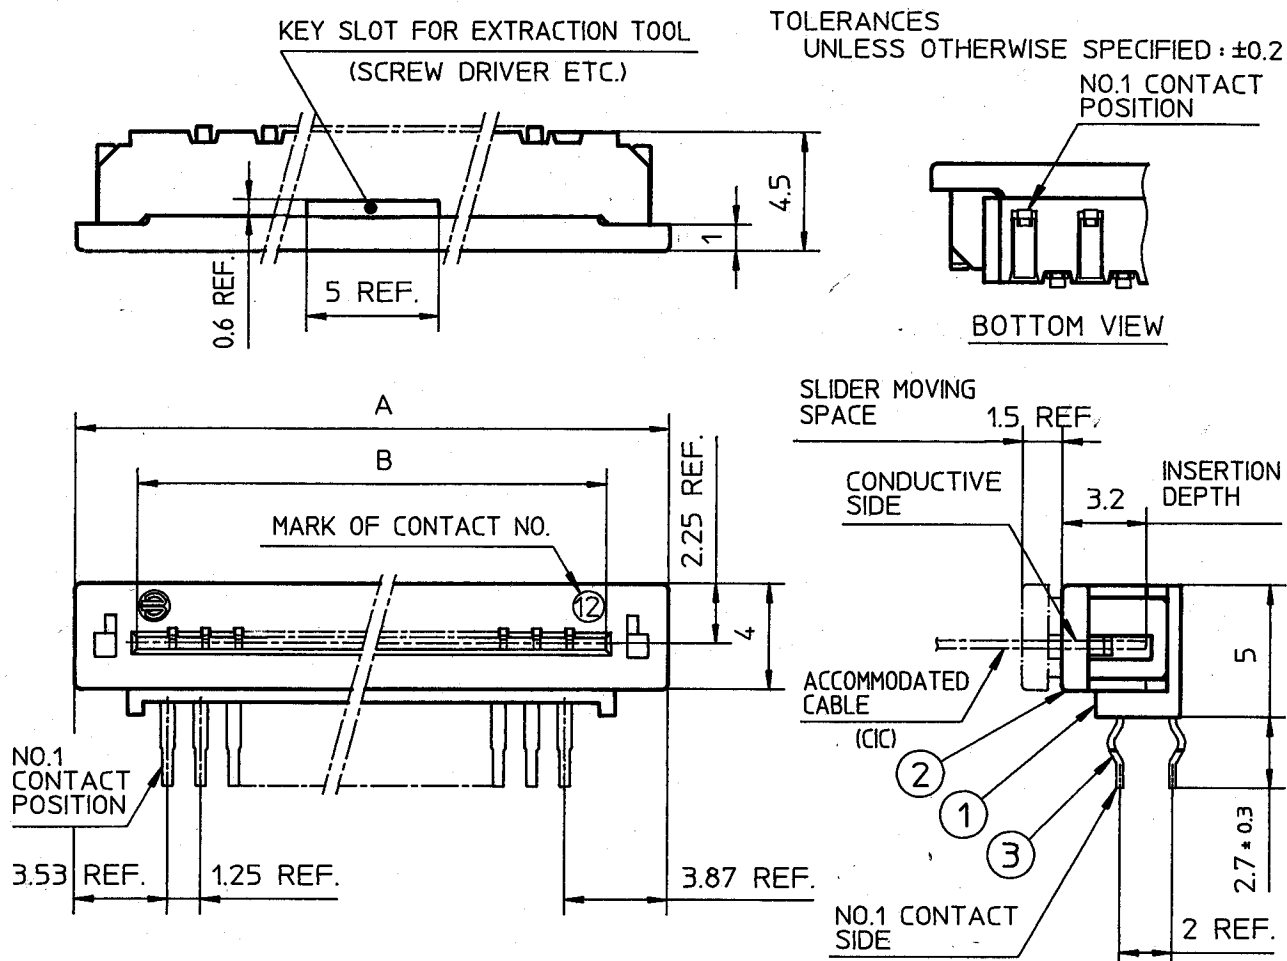


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED (UL94V-0)	1	COLOR:BLACK
2	SLIDER		1	COLOR:GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING:TIN ALLOY

n : NO. OF CONTACTS


RECOMMENDED PC BOARD

THICKNESS : 0.8~1.6

HOLE PATTERN (COMPONENT SIDE)

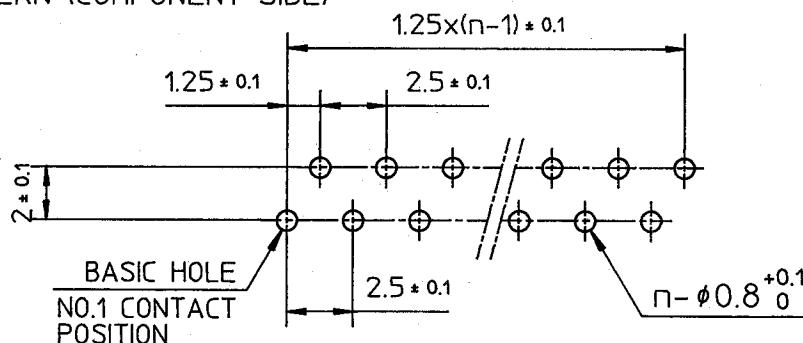

				SCALE	X	1.25mm SPACING CONNECTOR FOR CIC	
				DIM. IN	mm	CAT. NO.	
1	APR. 8,'99	REDRAWN M.I	H.T.	DESIGNED	M.Takada	SLP__R-5	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	M.Oba	DRAWING NO.	REV.
MATERIAL				CHECKED	T.Nishimoto	JSA 28895	1
				APPROVED	A.NAKAI		
				DATE	JUN. 14, 1987		

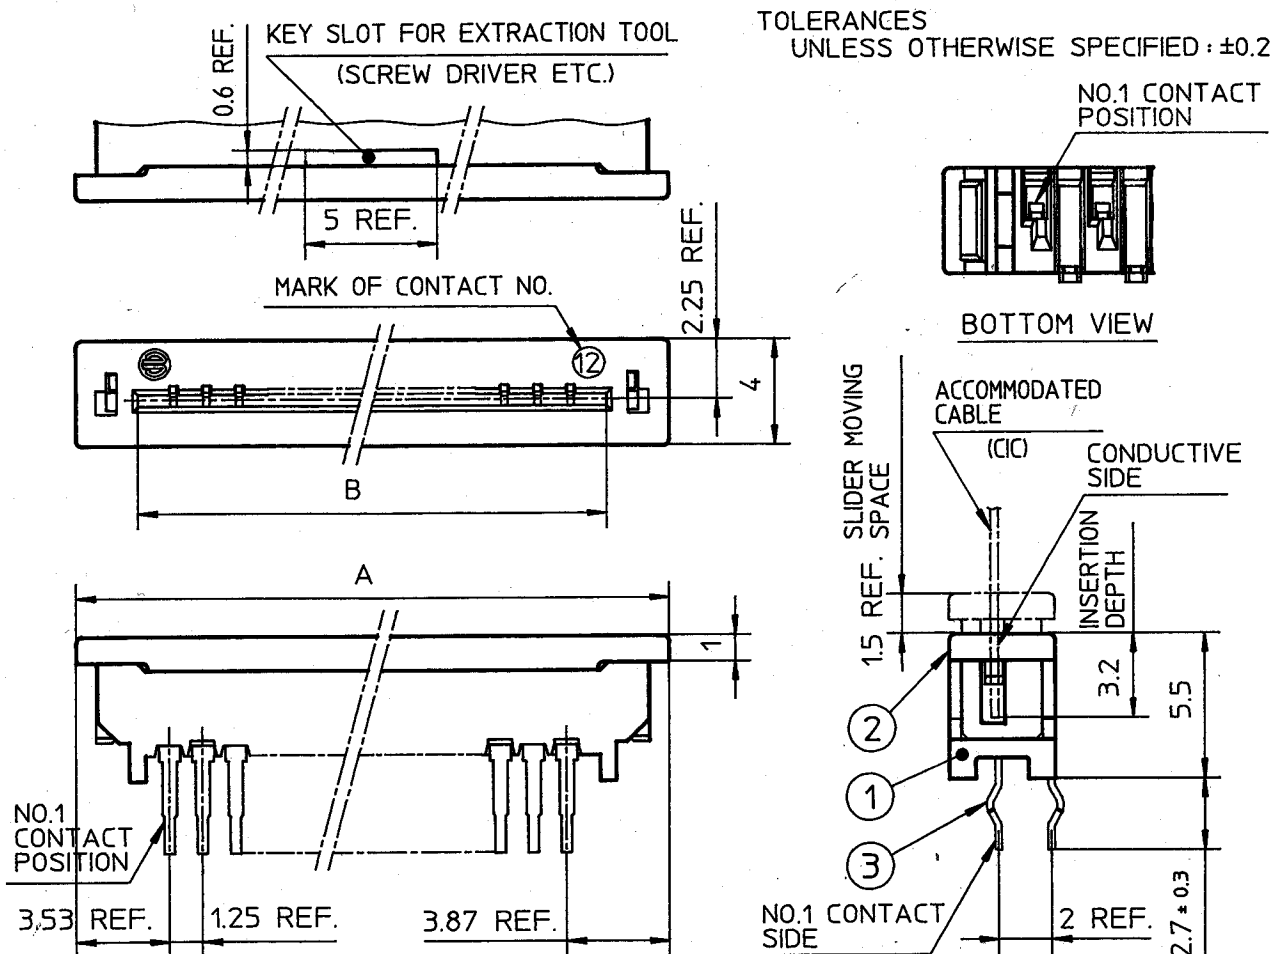


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED (UL94V-0)	1	COLOR: BLACK
2	SLIDER		1	COLOR: GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING: TIN ALLOY

n: NO. OF CONTACTS

RECOMMENDED PC BOARD

THICKNESS : 0.8~1.6

HOLE PATTERN (COMPONENT SIDE)

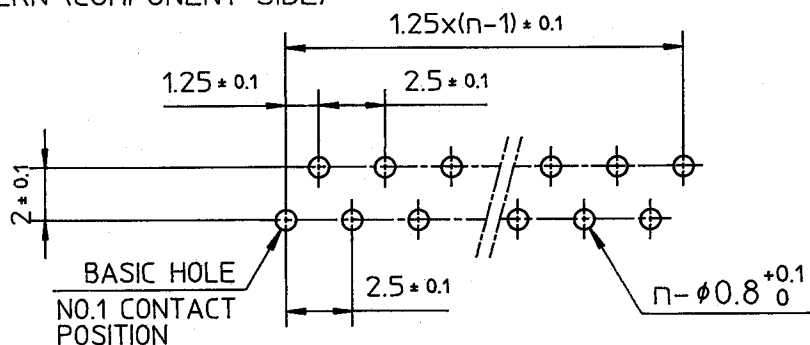


				SCALE	X	1.25mm SPACING CONNECTOR FOR CIC	
				DIM. IN	mm	CAT. NO.	
1	APR. 8, '99	REDRAWN M.I	H.T.	DESIGNED	M.Takada	SLP__S-5	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	M.Oba	DRAWING NO.	REV.
MATERIAL				CHECKED	T.Nishimoto	JSA 28894	1
				APPROVED	A.NAKAI		
				DATE	JUN. 14, 1987		

FCI

RECOMMENDED CABLE (CIC)

n : NO. OF CONDUCTORS

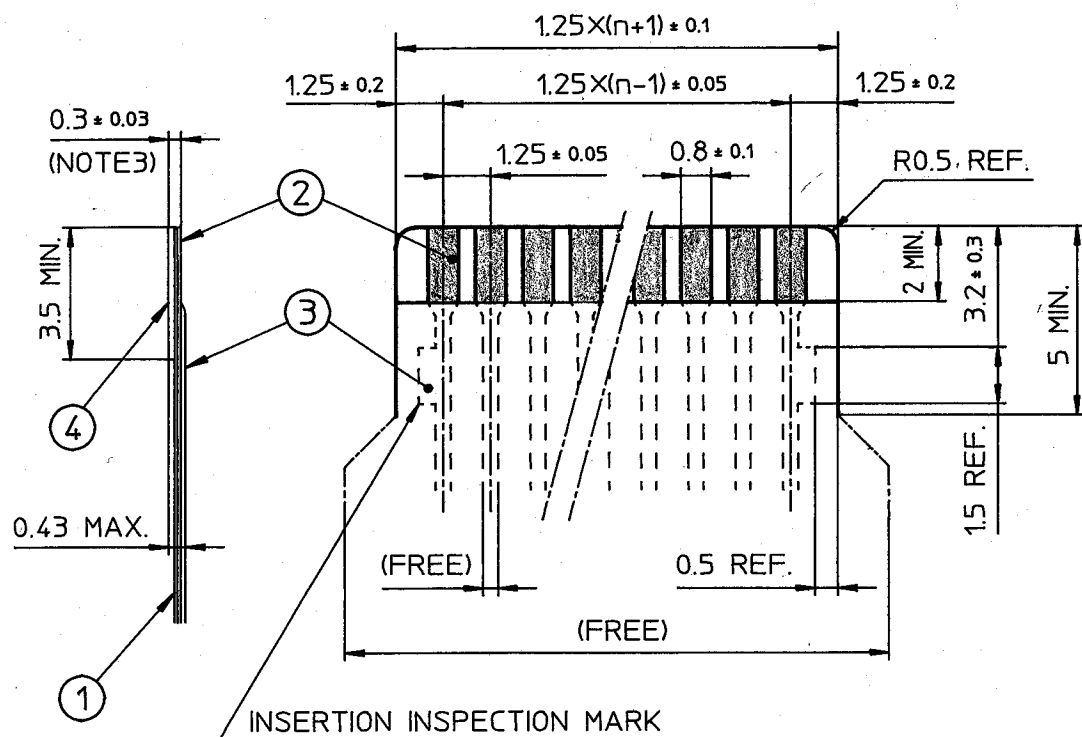

BILL OF MATERIAL

PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYESTER OR EQUAL	75
2	CONDUCTOR	CARBON PASTE OVER SILVER PASTE	10 MIN.
3	OVERLAY	POLYESTER OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR EQUAL	188

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. THIS DIMENSION PRESCRIBES TOTAL THICKNESS OF PT. NO. 1, 2 & 4 INCLUDING ADHESIVES.

				SCALE	×	RECOMMENDED CABLE (CIC)	
				DIM. IN	mm	CAT. NO.	
1	JUN. 2.'98	REDRAWN M.I	H.T.	DESIGNED	M.Takada	SLP__R/S-5__	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	M.Oba	DRAWING NO.	REV.
MATERIAL				CHECKED	T.Nishimoto	JSA 28896	1
				APPROVED	A.NAKAI		
				DATE	JAN. 14, 1987		

FCI