

CAT. NO. & DIMENSIONS

NO. OF CONTACTS	NOTE 3	STRAIGHT TYPE CAT. NO.	NOTE 3	RIGHT ANGLE TYPE CAT. NO.	DIMENSIONS (NOTE2)	
					A ±0.3	B ±0.1
4		SLP 4S - 5HS		SLP 4R - 5HS	11.15	6.45
5	*	SLP 5S - 5HS	*	SLP 5R - 5HS	12.40	7.70
6		SLP 6S - 5HS	*	SLP 6R - 5HS	13.65	8.95
7		SLP 7S - 5HS		SLP 7R - 5HS	14.90	10.20
8		SLP 8S - 5HS		SLP 8R - 5HS	16.15	11.45
9		SLP 9S - 5HS		SLP 9R - 5HS	17.40	12.70
10		SLP10S - 5HS		SLP10R - 5HS	18.65	13.95
11		SLP11S - 5HS		SLP11R - 5HS	19.90	15.20
12		SLP12S - 5HS		SLP12R - 5HS	21.15	16.45
13		SLP13S - 5HS	*	SLP13R - 5HS	22.40	17.70
14		SLP14S - 5HS		SLP14R - 5HS	23.65	18.95
15	*	SLP15S - 5HS		SLP15R - 5HS	24.90	20.20
16		SLP16S - 5HS		SLP16R - 5HS	26.15	21.45
17		SLP17S - 5HS	*	SLP17R - 5HS	27.40	22.70
18		SLP18S - 5HS		SLP18R - 5HS	28.65	23.95
19	*	SLP19S - 5HS		SLP19R - 5HS	29.90	25.20
20		SLP20S - 5HS		SLP20R - 5HS	31.15	26.45

CAT. NO.

SERIES NAME _____ SLP (n) S - 5HS
 NO. OF CONTACTS _____
 S : STRAIGHT TYPE
 R : RIGHT ANGLE TYPE
 VARIATION _____


NOTES

- 1) THIS IS SMT CONNECTOR FOR HAND SOLDER
- 2) SEE PART DRAWINGS FOR DIMENSIONS A & B
- 3) PLEASE CONSULT US IN CASE OF USING PARTS WITH *MARK

				SCALE	×	CAT. NO. TABLE FOR 1.25mm SPACING CONNECTOR	
				DIM. IN	mm	CAT. NO.	
4	•00 10-6	ECN-J00715 M.I 16-20S/R POS. ADDED.	H.T.	DESIGNED		SLP__R/S - 5HS	
3	•93 8-3	10R POS. ADDED. A.U	S.I	DRAWN	A.Ushikubo	DRAWING NO.	REV.
2	•92 4-16	10S,14S,7R POS. ADDED. A.U	JTK	CHECKED	S. Ito	JSA 90947	4
1	•90 8-21	8R POS. ADDED. A.U	JTK	APPROVED	J.Kobayashi	DF-122	
REV.	DATE	DESCRIPTION	CKD.	DATE	AUG. 21, 1990	FCI	

SC-SLP 04 JSA90673.90674.28896


FILE

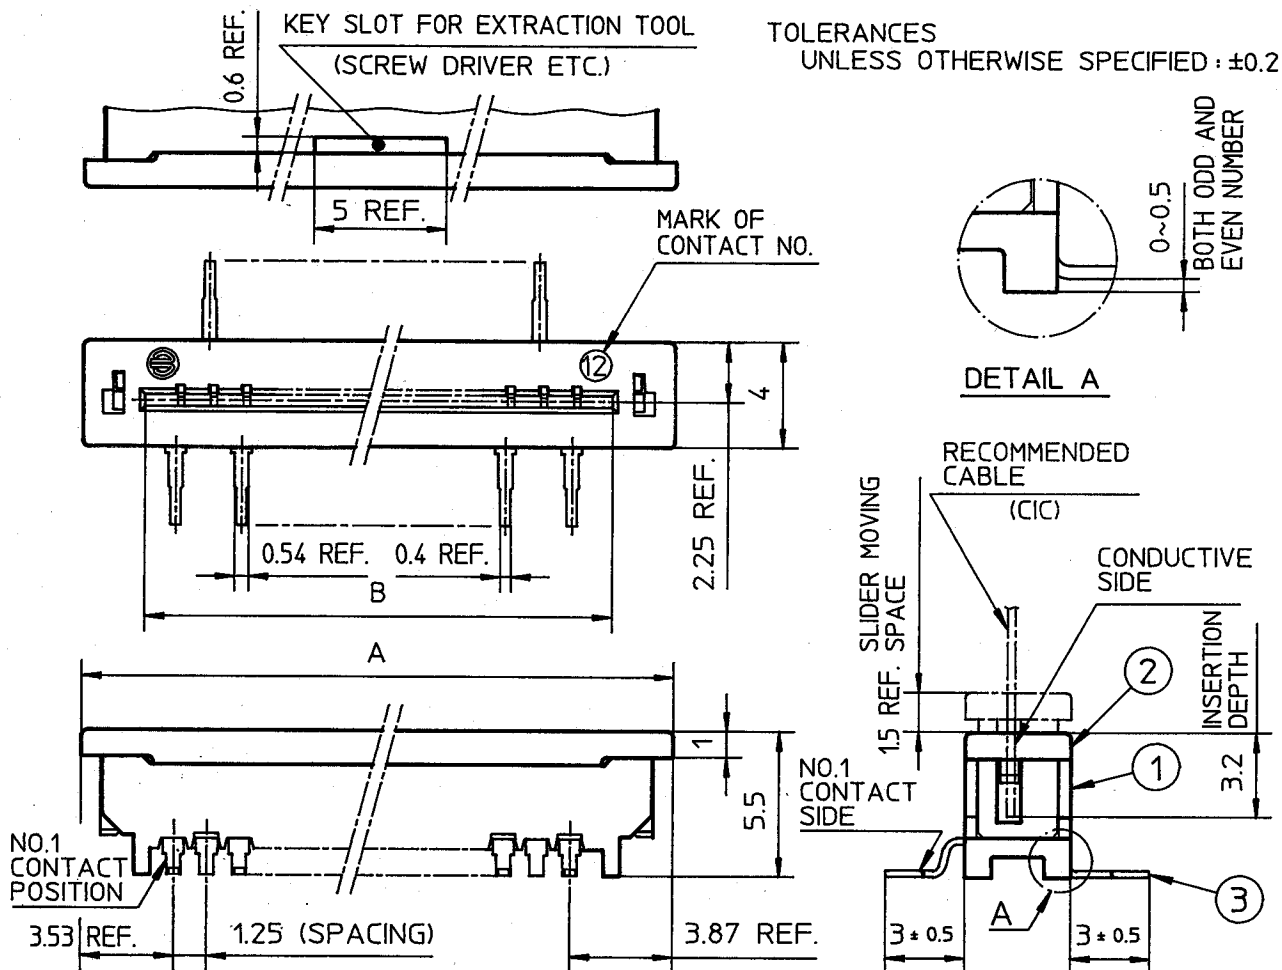


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED (UL94V-0)	1	COLOR:BLACK
2	SLIDER		1	COLOR:GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING:TIN ALLOY

RECOMMENDED PC BOARD LAYOUT
COMPONENT SIDE

n: NO. OF CONTACTS

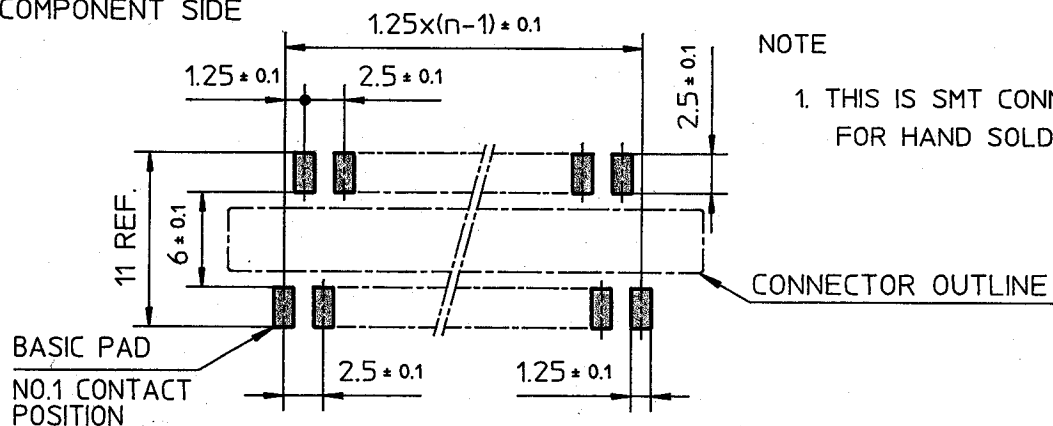


				SCALE	×	1.25mm SPACING CONNECTOR FOR CIC	
				DIM. IN	mm	CAT. NO.	
1	JUN. 2, '98	REDRAWN	M.I.	H.T.	DESIGNED	SLP__S-5HS	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	A.Ushikubo	DRAWING NO.	REV.
MATERIAL				CHECKED	S.Ito	JSA 90673	1
				APPROVED	T.Kobayashi	FCI	
				DATE	JAN. 12, 1990		

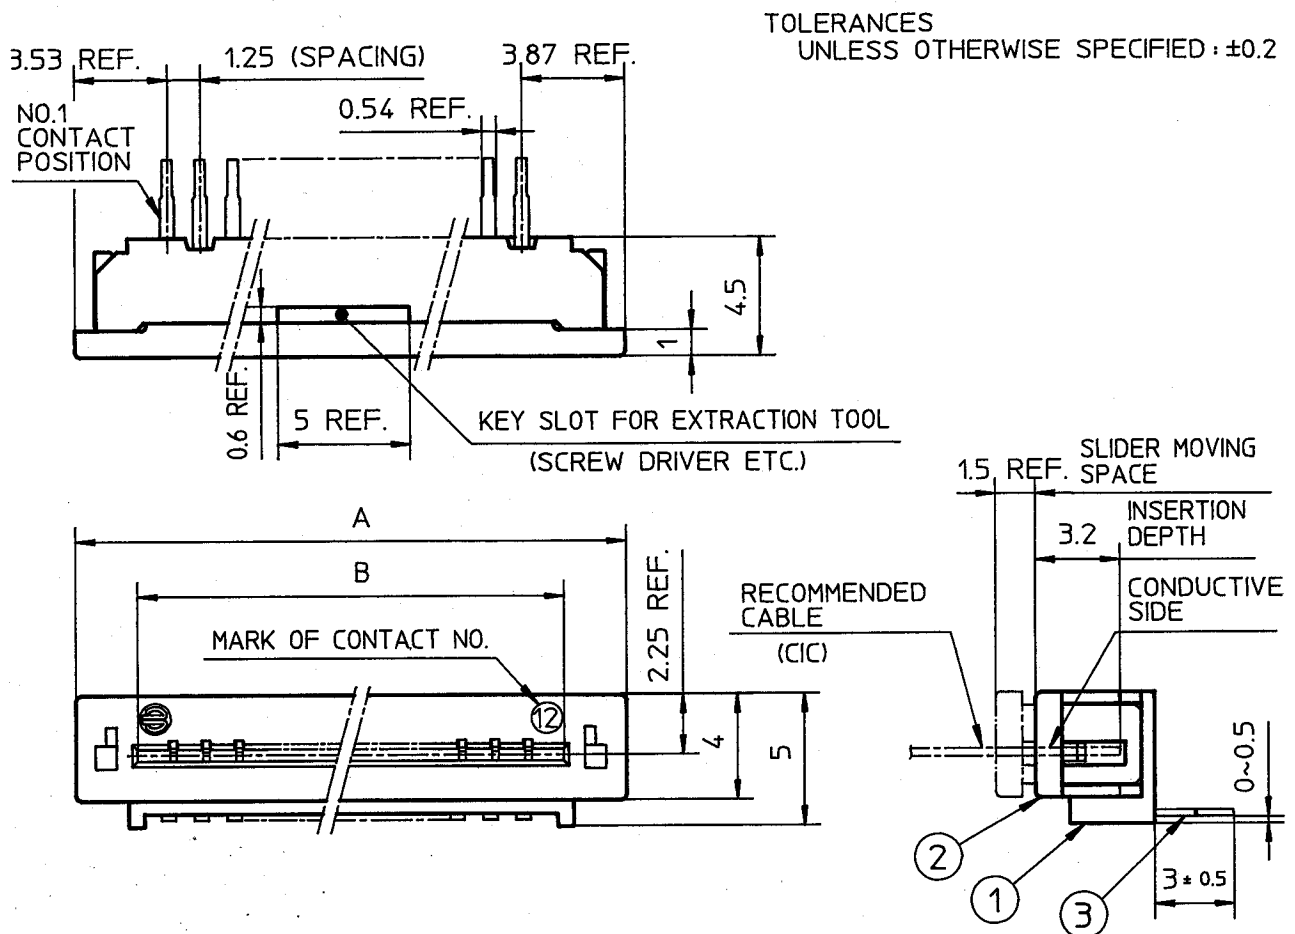

PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	PET RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	COLOR : GRAY
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : TIN ALLOY

n : NO. OF CONTACTS

RECOMMENDED PC BOARD LAYOUT COMPONENT SIDE

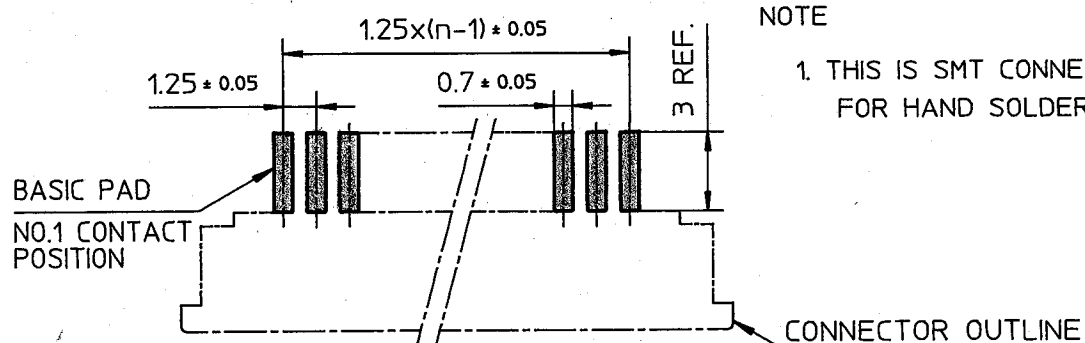


NOTE

1. THIS IS SMT CONNECTOR FOR HAND SOLDER.

				SCALE	$\times$	1.25mm SPACING CONNECTOR FOR CIC	
				DIM. IN	mm	CAT. NO.	
1	JUN. 2, '98	REDRAWN	M.I.	H.T.	DESIGNED	SLP_R-5HS	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	A.Ushikubo	DRAWING NO.	REV.
MATERIAL				CHECKED	S.Ito	JSA 90674	1
				APPROVED	T.Kobayashi		
				DATE	JAN. 12, 1990		

RECOMMENDED CABLE (CIC)

n : NO. OF CONDUCTORS

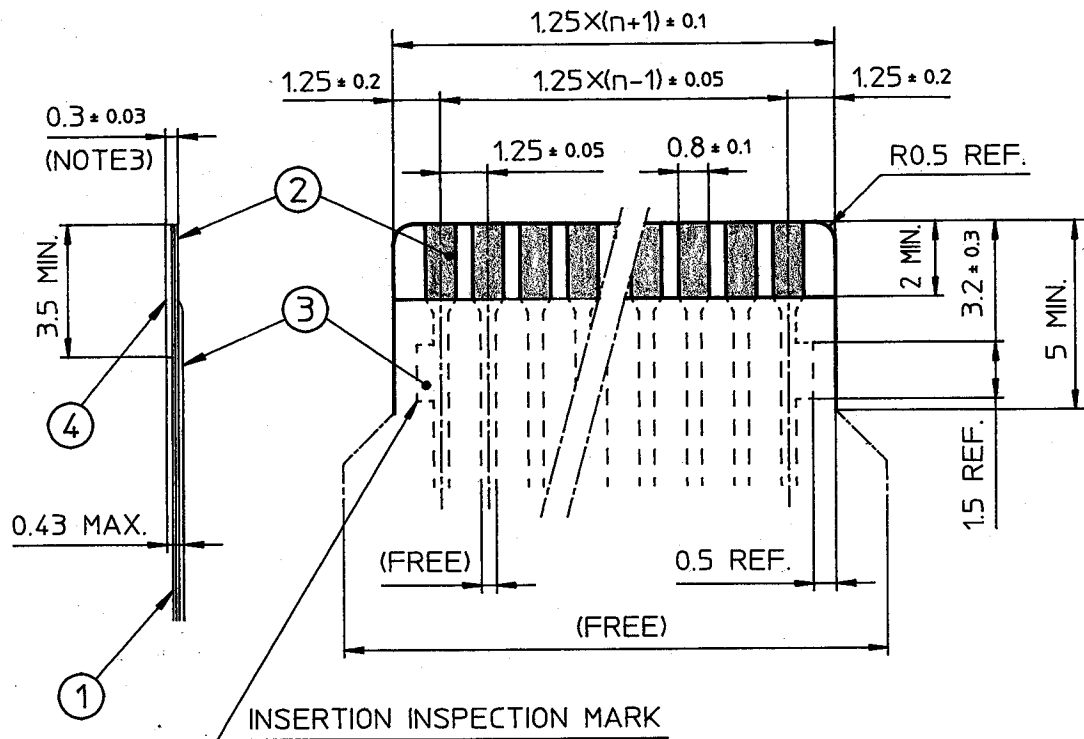

BILL OF MATERIAL

PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYESTER OR EQUAL	75
2	CONDUCTOR	CARBON PASTE OVER SILVER PASTE	10 MIN.
3	OVERLAY	POLYESTER OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR EQUAL	188

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. THIS DIMENSION PRESCRIBES TOTAL THICKNESS OF PT. NO. 1, 2 & 4 INCLUDING ADHESIVES.

				SCALE	✕	RECOMMENDED CABLE (CIC)	
				DIM. IN	mm	CAT. NO.	
1	JUN. 2.'98	REDRAWN M.I	H.T.	DESIGNED	M.Takada	SLP__R/S-5__	
REV.	DATE	DESCRIPTION	CKD.	DRAWN	M.Oba	DRAWING NO.	REV.
MATERIAL				CHECKED	T.Nishimoto	JSA 28896	1
				APPROVED	A.NAKAI		
				DATE	JAN. 14, 1987		

FCI