

T92 series

Two-Pole, 30 Amp PC Board or Panel Mount Relay

File E22575

File LR15734

File No. 5386

Type 2, 3, & 4 - File E22575

Coil Data (@ 25°C Coil Temperature)

DC Coils (1.7W)					
Nom. Voltage (VDC)	DC Resist. $\pm 10\%$ (Ohms)		Nom. Voltage (VDC)	DC Resist. $\pm 10\%$ (Ohms)	
12	86		48	1,390	
24	350		110	7,255	
AC Coils (4.0VA)					
Nom. Voltage (VAC)	Freq.	DC Resist. $\pm 10\%$ (Ohms)	Nom. Voltage (VAC)	Freq.	DC Resist. $\pm 10\%$ (Ohms)
12	60	9.1	110/120	50/60	950
24	60	36.6	220/240	50/60	3800
			250/277	50/60	5485

Features

- 30A DPST-NO and DPDT switching capabilities.
- Designed to control compressor loads to 3.5 tons, 25.3 FLA, 110 LRA.
- Extended life – >300,000 operations at 30A, 240VAC (DC coil).
– >100,000 operations at 30A, 240VAC (AC coil).
- Meets requirements of UL873 and UL508 spacings.
– .315" (8mm) through air, .375" (9.5mm) over surface.
- Meets requirements of VDE 8mm spacing, 4kV dielectric coil-to-contacts.
- Meets requirements of UL Class F construction.
- UL approved for 600VAC switching (1.5HP).
- Conforms to VDE 0435, 0631, and 0700.

Contact Ratings @ 25°C with relay properly vented. Remove tape over vent hole after soldering and cleaning.

Arrangements: 2 Form A (DPST-NO) and 2 Form C (DPDT).

Materials: Silver cadmium oxide.

Max. Load Rating:

Normally Open Contacts:

- 30A @ 120/277VAC, resistive;
- 10A @ 600VAC, resistive;
- 1 HP @ 120VAC, 2.5 HP @ 240VAC; 1.5 HP @ 480VAC, 1.5 HP @ 600VAC
- 110 LRA, 25.3 FLA, @ 240VAC with DC coil⁽¹⁾;
- 60 LRA, 14 FLA @ 240VAC with AC coil;
- 3A @ 240VAC pilot duty;
- 20A @ 28VDC;
- TV10 @ 120VAC.

VDE Rating (Flange Mount): 25A @ 400VAC, 100K Ops. (30K Ops. for Form C Models).

VDE Rating (PC Mount): 30A @ 400VAC, 100K Ops. (30K Ops. for Form C Models).

Normally Closed Contacts:

- 3A @ 28VDC or 277VAC, 2A @ 480VAC, 1A @ 600VAC.

VDE Rating (Flange or PC Mount): 3A @ 400VAC, 30K Ops.

Min. Load Rating:

Normally Open Contacts: 500mA @ 12VAC/VDC.

Normally Closed Contacts: 100mA @ 6VAC/VDC.

Expected Mechanical Life: 5 million operations.


Expected Electrical Life: 100,000 operations at rated load.

ARI 780-86 Endurance Test (section 6.6):


HVAC Definite Purpose Contactor Standard

Normally Open Contacts

- Single Phase/Two Pole (Both poles together switching a single load)
- 110 LRA, 25.3 FLA, 200K operations (DC Coil).



- Single Phase Per Pole (Single load per pole)
- 110 LRA, 18 FLA, 200K operations (DC Coil).
- 60 LRA, 14 FLA, 200K operations (AC Coil).



Note: Vent hole tape must be removed to achieve all listed ratings.

Initial Dielectric Strength

Between Contacts and Coil: 4,000V rms, 50/60 Hz.

Between Open Contacts: 1,500V rms, 50/60 Hz.

Between Poles: 2,000V rms, 50/60 Hz.

Initial Insulation Resistance

Between Mutually Insulated Elements: 10⁹ ohms, min. @ 500VDC.

Coil Data

Voltage: 12 through 110VDC and 12 through 277VAC.

Resistance: See Coil Data table.

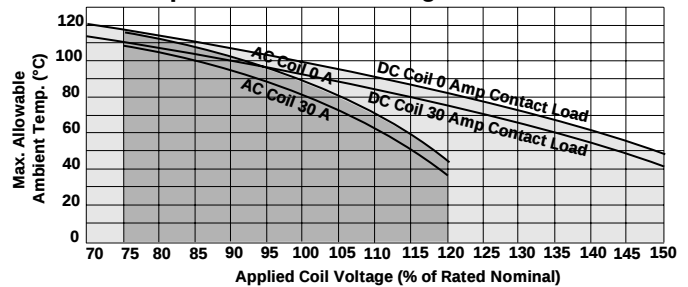
Nom. Power: AC Coil: 4.0VA; **DC Coil:** 1.7W.

Coil Temp. Rise: 35°C/W.

Max. Coil Temp.: 140°C.

Duty Cycle: Continuous.

Ambient Temperature vs. Coil Voltage



Assumptions:

1. Thermal resistance = 35°C per Watt (DC only.)
2. Still air.
3. Nominal coil resistance.
4. Maximum mean coil temperature = 140°C using change of resistance method, Class F.
5. Coil temperature rise due to load = 6.3°C @ 30 amps.
6. Curves are based on 1.7W at 25°C (DC only.)

Operate Data

Must Operate Voltage: AC Coil: 80% of nominal voltage or less.

DC Coil: 75% of nominal voltage or less.

Must Release Voltage: 10% of nominal voltage or more.

Initial Operate Time⁽²⁾: 15 ms typical, (25 ms max. w/bounce).

Initial Release Time⁽²⁾: 10 ms typical, (25 ms max. w/bounce).

Max Operating Frequency: 14 operations per minute.

Environmental Data

Temperature Range: Storage: -55°C to +155°C.

Operating: AC Coil: -40°C to +65°C.

DC Coil: -40°C to +85°C.

Vibration: 0.065" (1.65mm) double amplitude for 10-55 Hz., functional.

Shock, Operational: 10g for 11 ms, 1/2 sine wave pulse with no contact opening > 100μs.

Shock, Mechanical: 100g for 11 ms, 1/2 sine wave pulse.

Flammability: UL 94V-0.

Mechanical Data

Termination: Printed circuit terminals; .250" (6.35mm) quick connects for coil and contacts; or .187" (4.75mm) quick connects for coil and .250" (6.35mm) quick connects for contacts.

Enclosure: Unsealed, plastic dust cover or immersion cleanable, tape sealed plastic cover.

Weight: 3 oz. (86g) approximately.

Conditions

All parametric, environmental and life tests are performed according to EIA Standard RS-407-A at standard test conditions (25°C ambient, 20-50% RH, 29.5 ± 1" Hg.) unless otherwise noted.

Notes

- (1) FLA, LRA ratings are compatible with 3.5 ton compressor applications.
- (2) Nominal voltage, no coil suppression, excluding bounce.

Ordering Information

Typical Part Number B **T92** **S** **11** **D** **2** **2** **-24**

1. Basic Series:

T92 = Printed circuit board / panel mount power relay.

2. Enclosure:

P = Plastic dust cover (unsealed). S = Immersion cleanable, tape sealed plastic case (code 1).

3. Contact Arrangement:

7 = 2 form A (DPST-NO). 11 = 2 form C (DPDT).

4. Coil Input:

A = AC voltage, 60 Hz. or 50/60 Hz. (See Coil Data Table) D = DC voltage.

5. Mounting & Termination:

1 = Printed circuit board mount; printed circuit board terminals for coil and contacts.

2 = Panel mount via flanged cover; .250" (6.35mm) x .032" (.81mm) quick connect terminals for coil and contacts.

3 = Panel mount via flanged cover; .187" (4.75mm) x .032" (.81mm) quick connect terminals for coil and .250" (6.35mm) for contacts.

4 = Panel mount via flanged cover, .187" (4.75mm) x .020" (.51mm) quick connect terminals for coil and .250" (6.35mm) for contacts.

6. Contact Material:

2 = Silver cadmium oxide.

7. Coil Voltage: (See Coil Data Table)

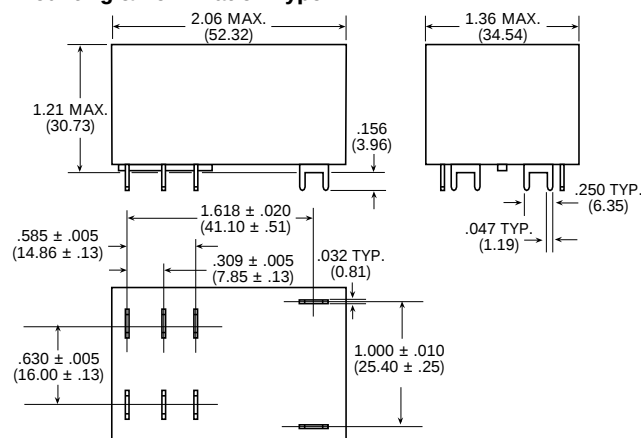
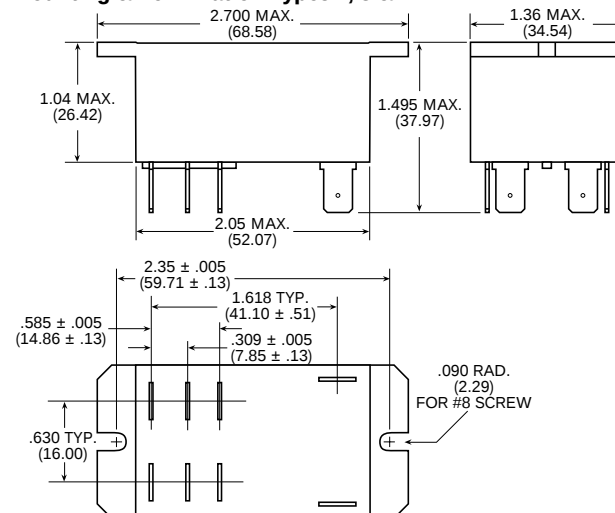
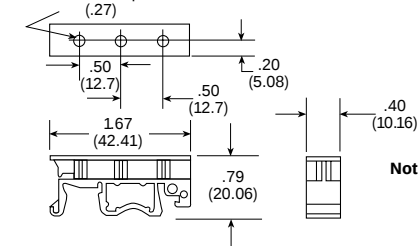

(DC) 12 = 12VDC 24 = 24VDC 48 = 48VDC 110 = 110VDC

(60Hz.) 12 = 12VAC 24 = 24VAC


(50/60Hz.) 110 = 100/110VAC 120 = 110/120VAC 240 = 220/240VAC 277 = 250/277VAC

Stock Items – We recommend that our authorized distributors stock the following items for immediate delivery.

T92P7A22-24 T92P7A22-240 T92P7D12-24 T92P7D22-24 T92P11A22-120 T92P11D22-12 T92S7D12-12 T92S11D22-12
 T92P7A22-120 T92P7D12-12 T92P7D22-12 T92P11A22-24 T92P11A22-240 T92P11D22-24 T92S7D12-24 T92S11D22-24

Outline Dimensions**Mounting & Termination Type 1****Mounting & Termination Types 2, 3 & 4****DIN Mount Adapter - 9T91A001**3 Holes for #6-32 Screw
0.011 Deep
(.27)**Wiring Diagram**

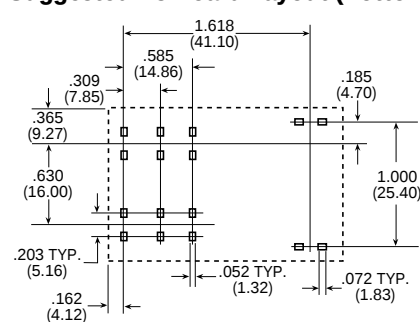Only necessary terminals are present on single throw models.

Suggested PC Board Layout (Bottom View)**Note:** An alternate PC board layout utilizes .076 ± .003 (1.93 ± .076) diameter holes on the same center-to-center spacing shown above. Use of the rectangular holes is recommended for improved solderability.