

LOC		DIST		REVISIONS					
CM		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					L	REVISED PER EC 063B-1094-05	22FEB05	KW	SR

1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.





CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD FINISH ON SOLDER TAIL END.


4. DIMENSIONS IN BRACKETS ARE IN INCHES.

OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.


CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN FINISH ON SOLDER TAIL END.

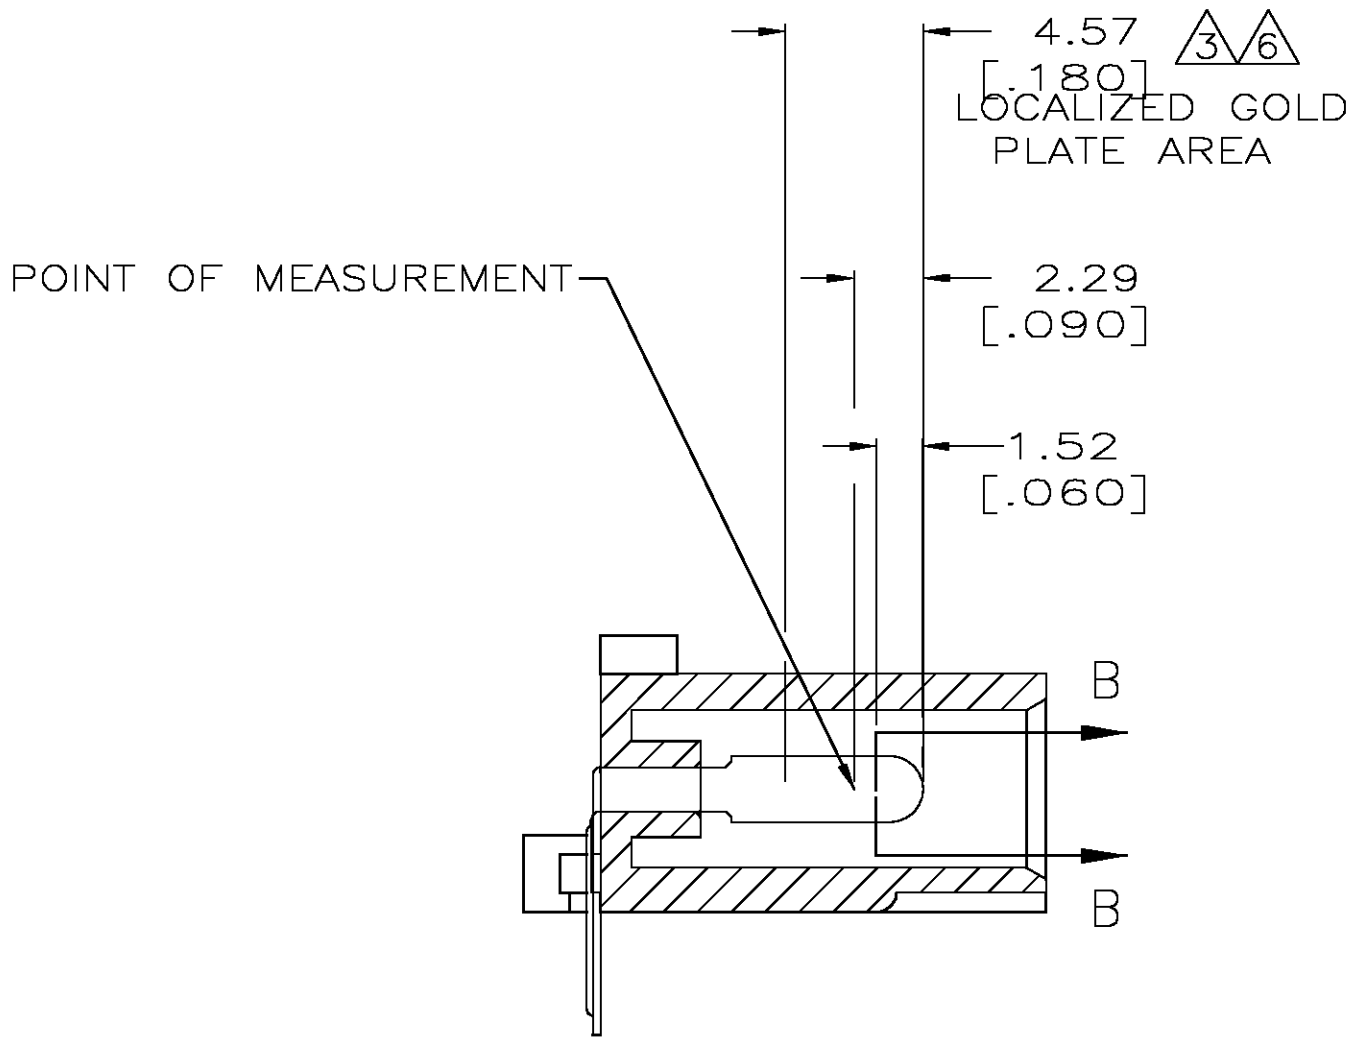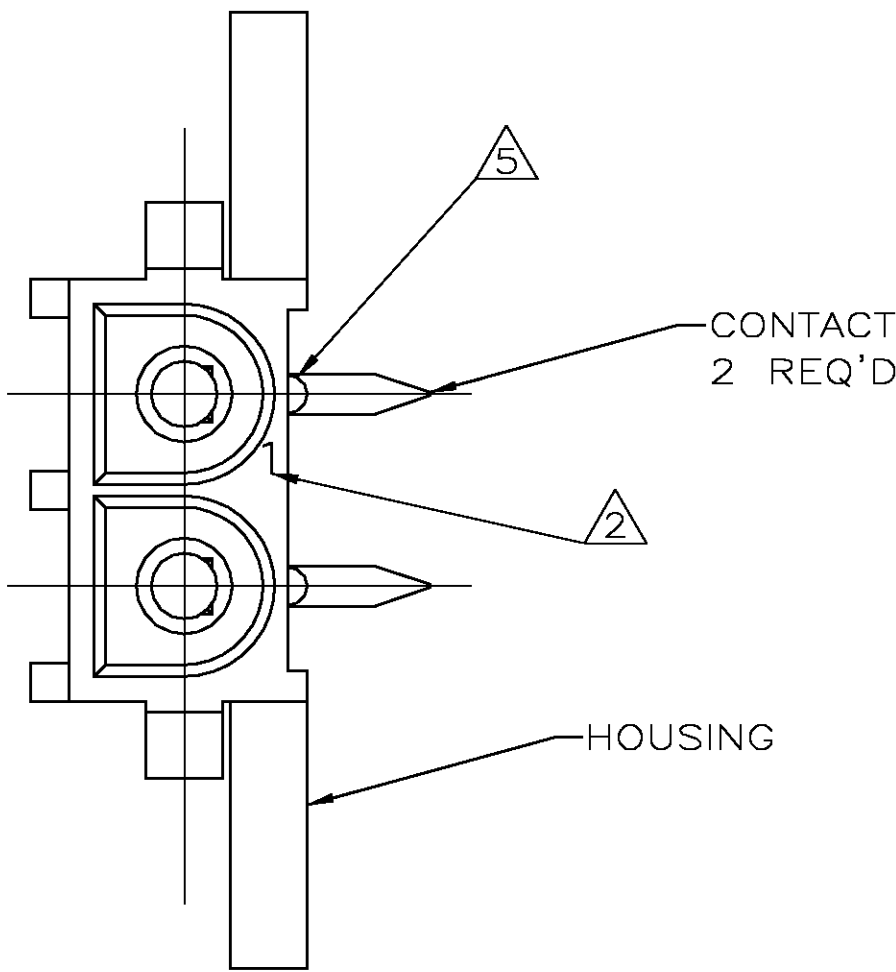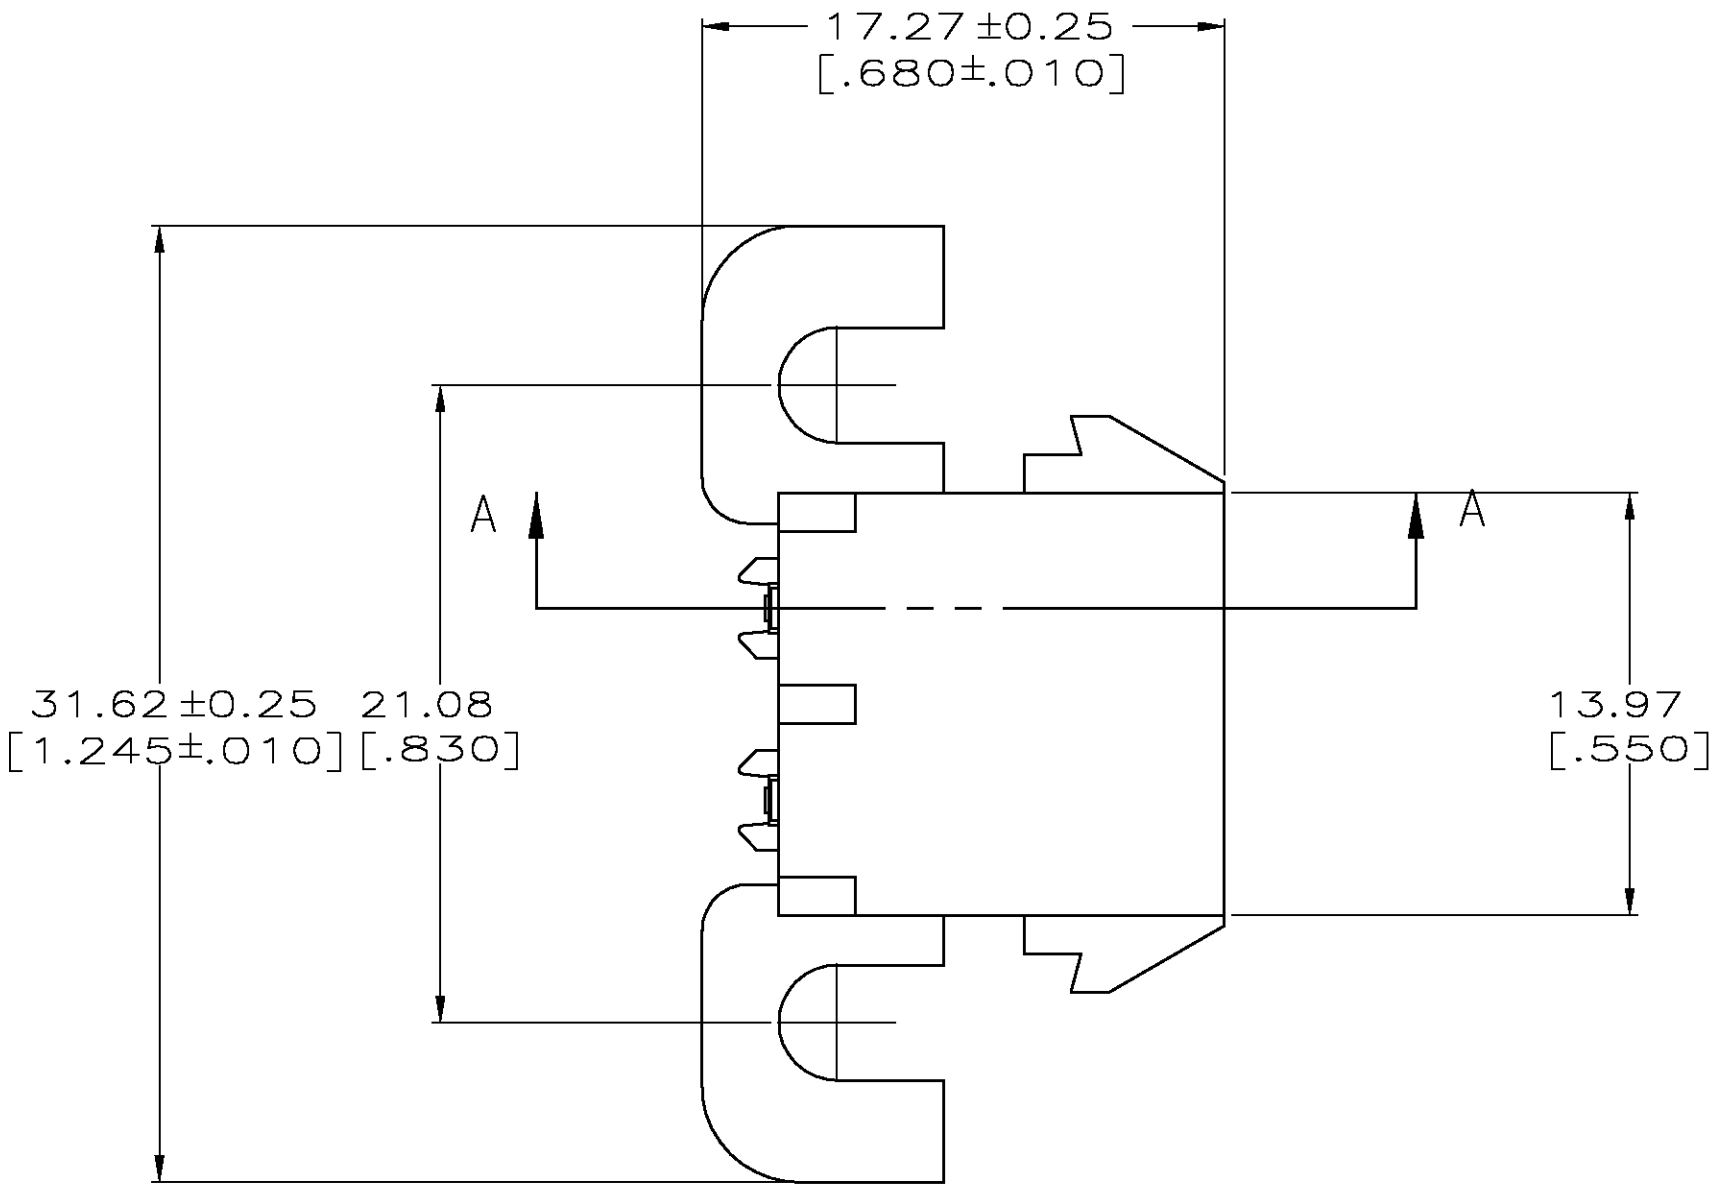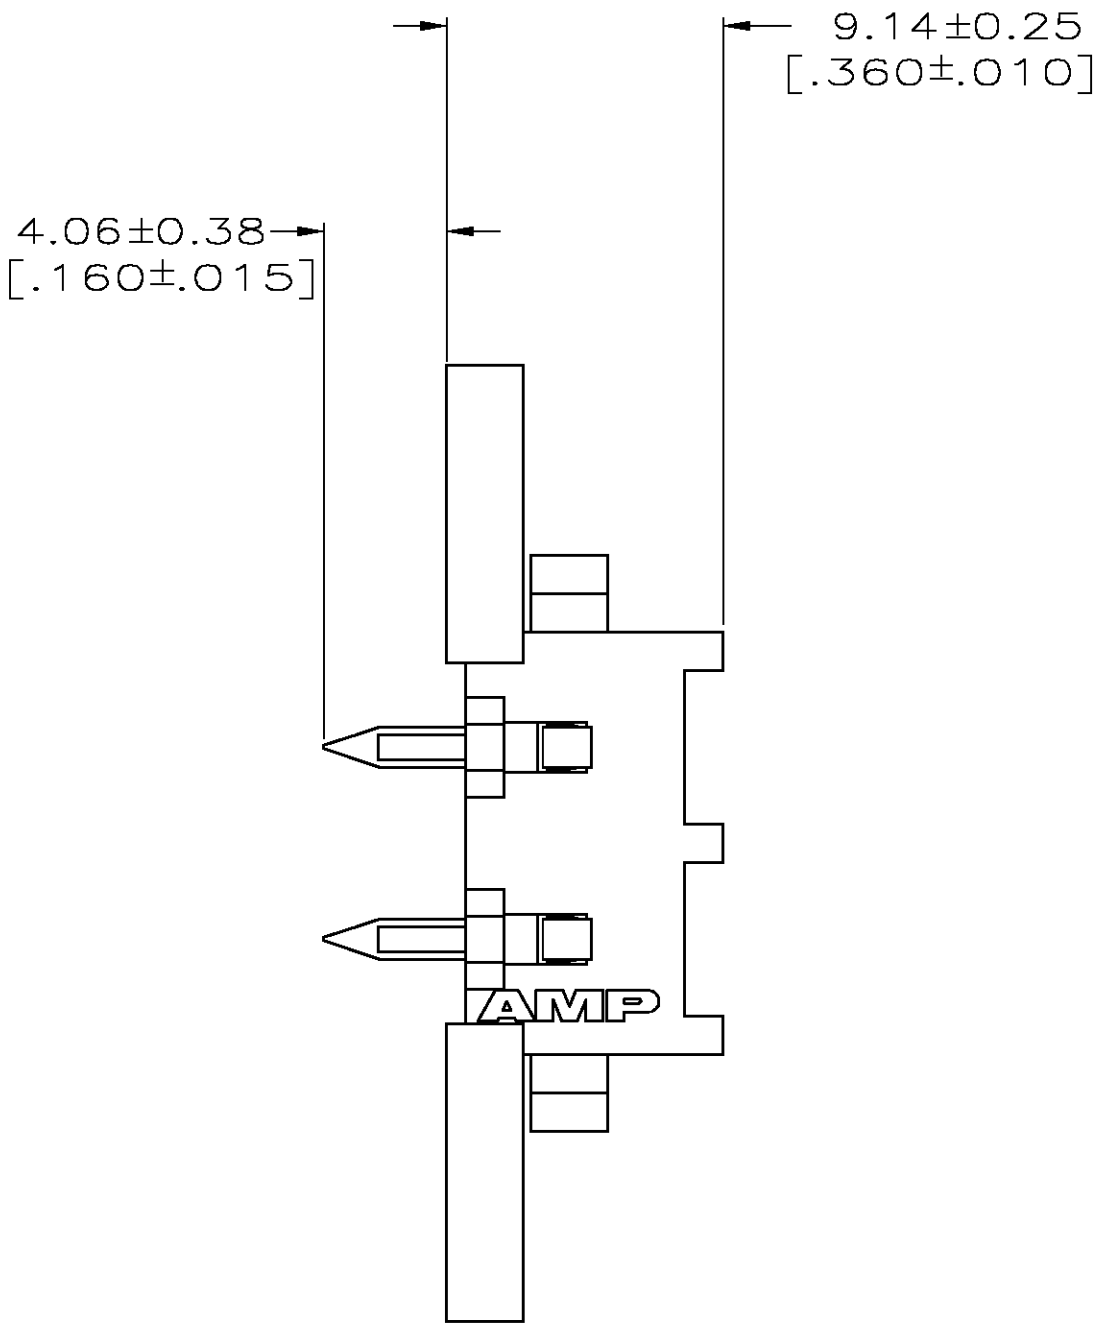


SECTION A-A

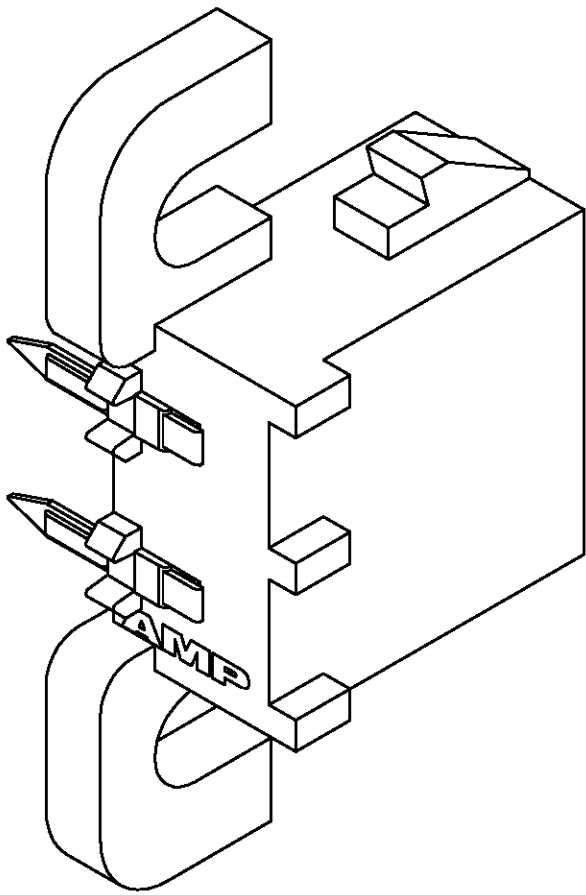

3-DIMENSIONAL MODEL NTS

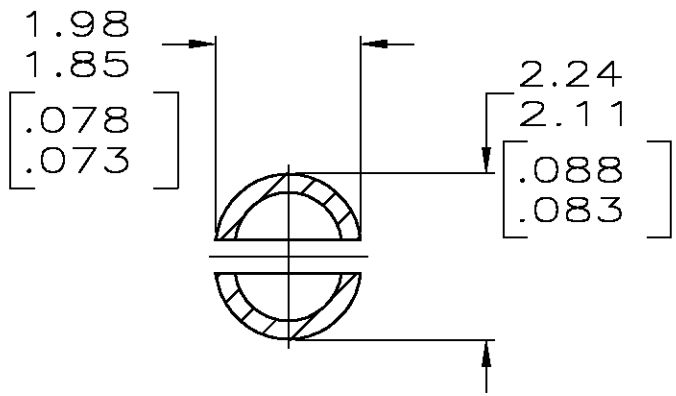

SECTION B-B
SCALE 10:1

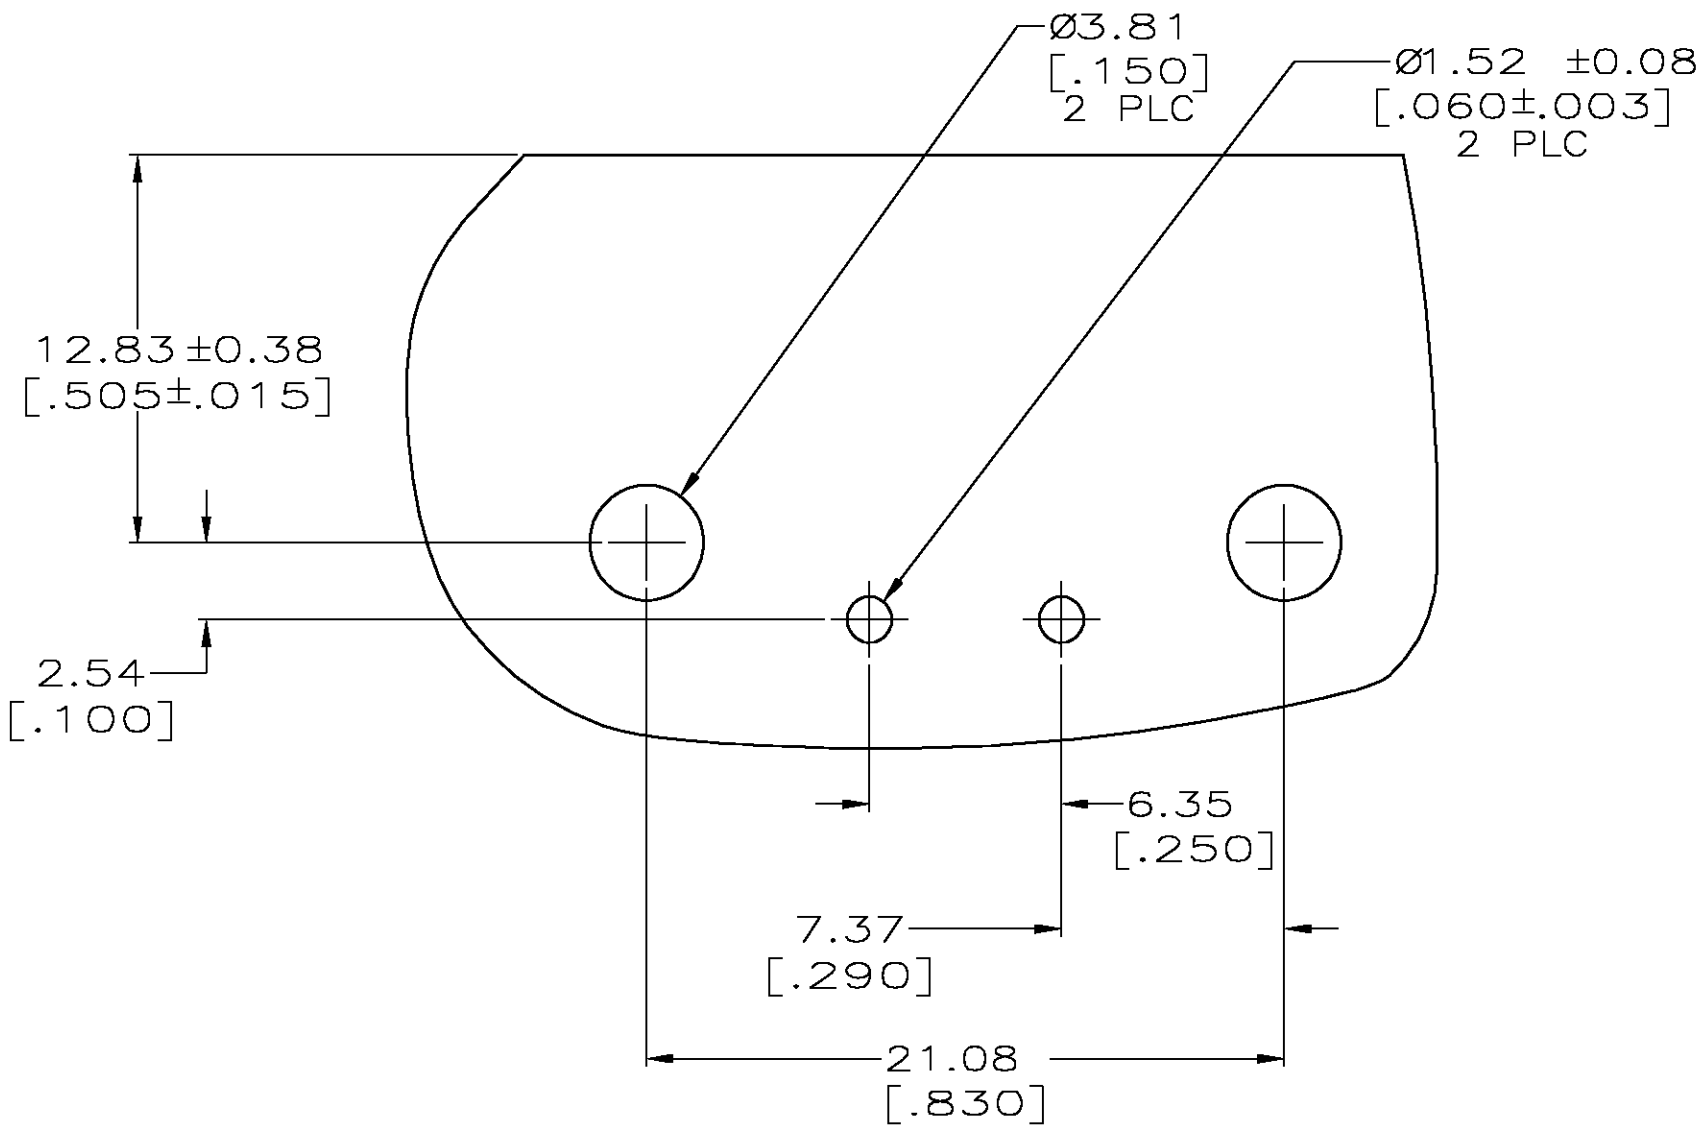

RECOMMENDED MOUNTING HOLE PATTERN
FOR .062 [1.57] THICK P.C. BOARD

PH BRZ GOLD 6	NYLON UL 94V-O	3-350942-0
PH BRZ GOLD 3	NYLON UL 94V-O	2-350942-0
PH BRZ TIN	NYLON UL 94V-O	1-350942-0
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22FEB2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 22FEB2005	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 22FEB2005	PIN HEADER ASSEMBLY, RIGHT ANGLE MOUNT,2 POSITION, UNIVERSAL MATE-N-LOK(TM)		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC			
2 PLC ± -		SIZE			
3 PLC ± 0.13[.005]		PAGE CODE			
4 PLC ± -		DRAWING NO			
ANGLES		RESTRICTED TO			
FINISH		A1 00779 C=350942			
MATERIAL		CUSTOMER DRAWING			
SEE TABLE		SCALE 4:1			
SEE TABLE		SHEET 1 OF 1			
		REV L			

METRIC