


Ceramic High Voltage Disc Capacitors, Class 2



RoHS
COMPLIANT

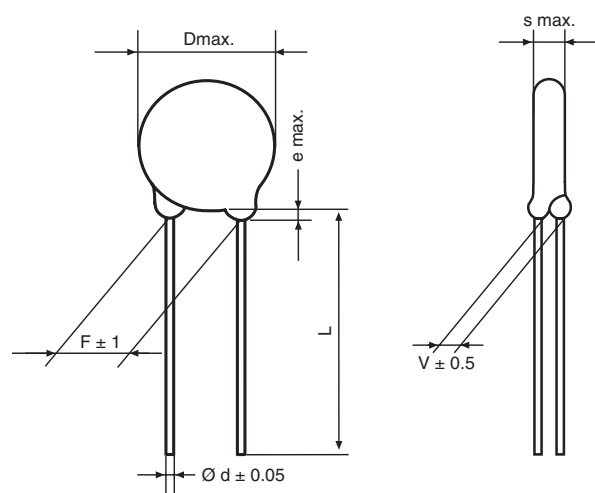

Dimensions in mm

	COATING EXTENSION e	BULK STANDARD LEAD LENGTH L
HA., HB., HC., HD., HE., HF.	3 max.	30.0 + 0 - 3 or
HGZ	5 max.	10.0 ± 1

COATING:

Epoxy dipped, insulating,
Flame retarding acc. to UL 94V-0

TEMPERATURE CHARACTERISTIC OF CAPACITANCE:

See General Information

TAPING AND SPECIAL LEAD CONFIGURATIONS:

See General Information

MARKING:

Capacitance value	Clear text
Capacitance tolerance	with letter code
Rated voltage	Clear text
Ceramic dielectric	with letter code
	HAZ, HBZ, HCZ, HFZ, HGZ series: 'D'
	HAE, HCE, HDE, HEE, HFE series: 'E'
	HAX, HBX, HCX series: no Letter code
Manufacturers logo	Where D ≥ 13 mm only

DESIGN:

Disc capacitors with epoxy coating

RATED VOLTAGE U_R :

HAZ, HAE, HAX	1 kV _{DC}
HBZ, HBE, HBX	2 kV _{DC}
HCZ, HCE, HCX	3 kV _{DC}
HDE	4 kV _{DC}
HEE	5 kV _{DC}
HFZ, HFE	6 kV _{DC}
HGZ	8 kV _{DC}

DIELECTRIC STRENGTH BETWEEN LEADS:

Component test

HAZ, HAE, HAX	1750 kV _{DC} , 2 s
HBZ, HBE, HBX	3000 kV _{DC} , 2 s
HCZ, HCE, HCX	5000 kV _{DC} , 2 s
HDE	6000 kV _{DC} , 2 s
HEE	7500 kV _{DC} , 2 s
HFZ, HFE	9000 kV _{DC} , 2 s
HGZ	12000 kV _{DC} , 2 s

DISSIPATION FACTOR $\tan \delta$:

HA., HB., HC., HD., HE.	≤ 25 • 10 ⁻³
HF., HG.	≤ 20 • 10 ⁻³

INSULATION RESISTANCE R_{IS} :

$$\geq 1 \cdot 10^{10} \Omega$$

CATEGORY TEMPERATURE RANGE ϑ_A :

(- 40 to + 85) °C

CLIMATIC CATEGORY ACC. TO EN 60068-1:

40 / 085 / 21

ORDERING INFORMATION

HAZ	101	M	BA	BJ0	K	R
MODEL	CAPACITANCE VALUE	TOLERANCE	RATED VOLTAGE	LEAD CONFIGURATION	INTERNAL CODE	RoHS COMPLIANT



ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 1 KV (DC)								
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE	
CLASS 2 K 2000								
47	± 10 %	7.0 x 3.0	5	0.6	1.2	Z	HAZ470□BA□□□KR	
56		7.0 x 3.0					HAZ560□BA□□□KR	
68		7.0 x 3.0					HAZ680□BA□□□KR	
82		7.0 x 3.0					HAZ820□BA□□□KR	
100		7.0 x 3.0					HAZ101□BA□□□KR	
150		7.0 x 3.0					HAZ151□BA□□□KR	
220		7.0 x 3.0					HAZ221□BA□□□KR	
330		7.0 x 3.0					HAZ331□BA□□□KR	
470		7.0 x 3.0					HAZ471□BA□□□KR	
680		7.0 x 3.0					HAZ681□BA□□□KR	
1000	± 20 %	9.0 x 3.0	7.5	0.6	1.2	Z	HAZ102□BA□□□KR	
1500		9.0 x 3.0					HAZ152□BA□□□KR	
2200		11.0 x 3.0					HAZ222□BA□□□KR	
3300		13.0 x 3.0					HAZ332□BA□□□KR	
4700		15.0 x 3.0					HAZ472□BA□□□KR	
CLASS 2 K 6000								
1000	± 20 %	7.0 x 3.0	5	0.6	1.2	E	HAE102□BA□□□KR	
1500		9.0 x 3.0					HAE152□BA□□□KR	
2200		9.0 x 3.0					HAE222□BA□□□KR	
3300		11.0 x 3.0					HAE332□BA□□□KR	
4700		11.0 x 3.0					HAE472□BA□□□KR	
6800		13.0 x 3.0	HAE682□BA□□□KR					
0.010 μF		15.0 x 3.0	7.5				HAE103□BA□□□KR	
CLASS 2 K 10000								
2200	- 20 + 50 % (± 20 %)**	7.0 x 3.0	5	0.6	1.2	X	HAX222□BA□□□KR	
3300		9.0 x 3.0					HAX332□BA□□□KR	
4700		9.0 x 3.0					HAX472□BA□□□KR	
6800		13.0 x 3.0	7.5				HAX682□BA□□□KR	
0.010 μF		13.0 x 3.0					HAX103□BA□□□KR	
0.015 μF		17.0 x 3.0					HAX153□BA□□□KR	
0.022 μF		18.0 x 3.0					HAX223□BA□□□KR	

* Standard lead configuration, other lead spacing and diameter available on request.

** ± 20 % available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M + 50 - 20 % = S
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	

ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 2 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 2000							
56	± 10 %	7.0 x 3.0	7.5	0.6	1.4	Z	HBZ560 BA KR
68		7.0 x 3.0					HBZ680 BB KR
82		7.0 x 3.0					HBZ820 BB KR
100		7.0 x 3.0					HBZ101 BB KR
150		7.0 x 3.0					HBZ151 BB KR
220		7.0 x 3.0					HBZ221 BB KR
330		7.0 x 3.0					HBZ331 BB KR
470	± 20 %	7.0 x 3.0					HBZ471 BB KR
680		7.0 x 3.0					HBZ681 BB KR
1000		9.0 x 3.0					HBZ102 BB KR
1500		9.0 x 3.0					HBZ152 BB KR
2200		11.0 x 3.0					HBZ222 BB KR
3300		13.0 x 3.0					HBZ332 BB KR
4700		15.0 x 3.0					HBZ472 BB KR
CLASS 2 K 6000							
680	± 20 %	7.0 x 3.0	7.5	0.6	1.4	E	HBE681 BB KR
1000		7.0 x 3.0					HBE102 BB KR
1500		9.0 x 3.0					HBE152 BB KR
2200		9.0 x 3.0					HBE222 BB KR
3300		11.0 x 3.0					HBE332 BB KR
4700		11.0 x 3.0					HBE472 BB KR
6800		13.0 x 3.0					HBE682 BB KR
0.010 μF		15.0 x 3.0					HBE103 BB KR
CLASS 2 K 10000							
1500	- 20 + 50 % (± 20 %) **	6.0 x 3.0	7.5	0.6	1.2	X	HBX152 BB KR
2200		7.0 x 3.0					HBX222 BB KR
3300		9.0 x 3.0					HBX332 BB KR
4700		9.0 x 3.0					HBX472 BB KR
6800		13.0 x 3.0					HBX682 BB KR
0.010 μF		13.0 x 3.0					HBX103 BB KR
0.015 μF		17.0 x 3.0					HBX153 BB KR
0.022 μF		18.0 x 3.0					HBX223 BB KR

* Standard lead configuration, other lead spacing and diameter available on request.

** ± 20 % available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M + 50 - 20 % = S
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	



ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 3 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 2000							
68	± 10 %	7.0 x 4.0	10	0.6	1.8	Z	HCZ680BC□□KR
82		7.0 x 4.0					HCZ820BC□□KR
100		7.0 x 4.0					HCZ101BC□□KR
120		7.0 x 4.0					HCZ121BC□□KR
150		7.0 x 4.0					HCZ151BC□□KR
180		8.0 x 4.0					HCZ181BC□□KR
220		8.0 x 4.0					HCZ221BC□□KR
330		8.0 x 4.0					HCZ331BC□□KR
470		10.0 x 4.0					HCZ471BC□□KR
680		10.0 x 4.0					HCZ681BC□□KR
1000	± 20 %	11.0 x 4.0	10	0.8	2.0	Z	HCZ102BC□□KR
1200		15.0 x 4.0					HCZ122BC□□KR
1500		15.0 x 4.0					HCZ152BC□□KR
2200		17.0 x 4.0					HCZ222BC□□KR
3300		21.0 x 4.0					HCZ332BC□□KR
4700		21.0 x 4.0					HCZ472BC□□KR
6800		25.0 x 4.0					HCZ682BC□□KR
CLASS 2 K 6000							
470	± 20 %	7.0 x 4.0	10	0.6	2.0	E	HCE471BC□□KR
680		8.0 x 4.0					HCE681BC□□KR
1000		9.0 x 4.0					HCE102BC□□KR
1500		11.0 x 4.0					HCE152BC□□KR
2200		11.0 x 4.0		HCE222BC□□KR			
3300		15.0 x 4.0		0.8	2.2		HCE332BC□□KR
4700		17.0 x 4.0					HCE472BC□□KR
6800		21.0 x 4.0					HCE682BC□□KR
0.010 μF	25.0 x 4.0	2.5	HCE103BC□□KR				

* Standard lead configuration, other lead spacing and diameter available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M + 50 - 20 % = S
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	

ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 4 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 6000							
33	± 20 % (± 10 %)**	8.0 x 4.5	12.5	0.6	1.9	E	HDE330□BD□□□KR
47		8.0 x 5.0			2.3		HDE470□BD□□□KR
68		8.0 x 5.0					HDE680□BD□□□KR
100		8.0 x 5.0					HDE101□BD□□□KR
150		8.0 x 5.0					HDE151□BD□□□KR
220		8.0 x 5.0					HDE221□BD□□□KR
330		8.0 x 5.0			2.5		HDE331□BD□□□KR
470		8.0 x 5.0					HDE471□BD□□□KR
680		9.0 x 5.0		0.8	2.7		HDE681□BD□□□KR
1000		10.0 x 5.0					HDE102□BD□□□KR
1500		12.0 x 5.0					HDE152□BD□□□KR
2200		13.0 x 5.0					HDE222□BD□□□KR
3300		15.0 x 5.0					HDE332□BD□□□KR
4700		18.0 x 5.0					HDE472□BD□□□KR

* Standard lead configuration, other lead spacing and diameter available on request.

** ± 10 % available on request.

ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 5 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 6000							
220	± 20 %	7.0 x 5.0	12.5	0.6	3.8	E	HEE221□BE□□□KR
330		9.0 x 5.0		0.8			HEE331□BE□□□KR
680		9.0 x 5.0					HEE681□BE□□□KR
1000		11.0 x 5.0					HEE102□BE□□□KR
1500		13.0 x 5.0					HEE152□BE□□□KR
2200		15.0 x 5.0					HEE222□BE□□□KR

* Standard lead configuration, other lead spacing and diameter available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	



ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 6 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 2000							
56	± 20 % (± 10 %)**	7.0 x 5.0	12.5	0.6	3.5	Z	HFZ560□BF□□□KR
68		7.0 x 5.0					HFZ680□BF□□□KR
82		7.0 x 5.0					HFZ820□BF□□□KR
100		8.0 x 5.0					HFZ101□BF□□□KR
120		8.0 x 5.0					HFZ121□BF□□□KR
150		8.0 x 5.0					HFZ151□BF□□□KR
180		10.0 x 5.0					HFZ181□BF□□□KR
220		10.0 x 5.0					HFZ221□BF□□□KR
270		10.0 x 5.0					HFZ271□BF□□□KR
330		10.0 x 5.0					HFZ331□BF□□□KR
390		12.0 x 5.0					HFZ391□BF□□□KR
470		12.0 x 5.0					HFZ471□BF□□□KR
560		13.0 x 5.0					HFZ561□BF□□□KR
680		15.0 x 5.0					HFZ681□BF□□□KR
820		15.0 x 5.0					HFZ821□BF□□□KR
1000		17.0 x 5.0		HFZ102□BF□□□KR			
1200		19.0 x 5.0		HFZ122□BF□□□KR			
1500		21.0 x 5.0		HFZ152□BF□□□KR			
1800		21.0 x 5.0		HFZ182□BF□□□KR			
2200		25.0 x 5.0		HFZ222□BF□□□KR			
2700	25.0 x 5.0	HFZ272□BF□□□KR					
CLASS 2 K 6000							
150	± 20 %	7.0 x 5.0	12.5	0.6	3.5	E	HFE151□BF□□□KR
220		7.0 x 5.0					HFE221□BF□□□KR
330		9.0 x 5.0					HFE331□BF□□□KR
470		9.0 x 5.0					HFE471□BF□□□KR
680		9.0 x 5.0					HFE681□BF□□□KR
1000		11.0 x 5.5					HFE102□BF□□□KR
1500		13.0 x 5.5					HFE152□BF□□□KR
2200		15.0 x 5.5					HFE222□BF□□□KR
3300		21.0 x 5.5		HFE332□BF□□□KR			
4700		21.0 x 5.5		HFE472□BF□□□KR			
6800		23.0 x 5.5		HFE682□BF□□□KR			

* Standard lead configuration, other lead spacing and diameter available on request.

** ± 10 % available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	

ORDERING INFORMATION, CERAMIC HIGH VOLTAGE DISC CAPACITORS, 8 KV (DC)							
C (pF)	TOL. (%)	D x s (mm)	F ± 1 * (mm)	d ± 0.05 * (mm)	V ± 0.5 * (mm)	CERAMIC CODE	ORDERING CODE
CLASS 2 K 2000							
100	± 20 % (± 10 %)**	9.0 x 8.3	12.5	0.8	4.0	Z	HGZ101□BP□□□KR
120		9.0 x 8.3					HGZ121□BP□□□KR
150		9.0 x 8.3					HGZ151□BP□□□KR
180		11.0 x 8.3					HGZ181□BP□□□KR
220		11.0 x 8.3					HGZ221□BP□□□KR
270		11.0 x 8.3					HGZ271□BP□□□KR
330		13.0 x 8.3					HGZ331□BP□□□KR
390		13.0 x 8.3					HGZ391□BP□□□KR
470		14.0 x 8.3					HGZ471□BP□□□KR
560		16.0 x 8.3					HGZ561□BP□□□KR
680		16.0 x 8.3					HGZ681□BP□□□KR
820		18.0 x 8.3					HGZ821□BP□□□KR
1000		18.0 x 8.3					HGZ102□BP□□□KR
1200		21.0 x 8.3					HGZ122□BP□□□KR
1500		21.0 x 8.3					HGZ152□BP□□□KR
1800		24.0 x 8.3					HGZ182□BP□□□KR
2200		24.0 x 8.3					HGZ222□BP□□□KR

* Standard lead configuration, other lead spacing and diameter available on request.

** ± 10 % available on request.

ORDERING CODE			
□	7th digit	Capacitance tolerance	± 10 % = K ± 20 % = M
□□□	10th to 12th digit	Lead configuration (See General Information)	
R	14th digit	RoHS Compliant Component	



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.