

Film and Foil Capacitors with Mixed Dielectric for Pulse Applications in PCM 5 mm

Special Features

- Pulse duty construction
- Constant capacitance value versus temperature (similar to the obsolete Polycarbonate)
- Low dissipation factor
- According to RoHS 2002/95/EC

Typical Applications

For general DC-applications requiring a high capacitance stability versus temperature e.g.

- Automotive electronics
- Lighting

Construction


Dielectric:

Mixed film

Capacitor electrodes:

Metal foil

Internal construction:

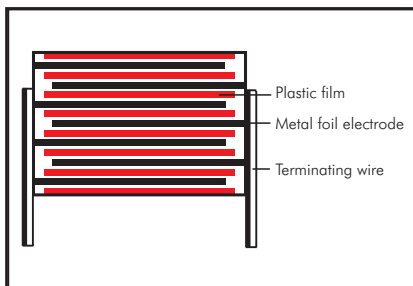

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Gold.
Epoxy resin seal: Yellow.

Electrical Data

Capacitance range:

100 pF to 0.022 μ F (E12-values on request)

Rated voltages:

100 VDC, 250 VDC, 400 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$ ($\pm 2.5\%$ available subject to special enquiry)

Operating temperature range:

-55°C to $+100^{\circ}\text{C}$

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at $+20^{\circ}\text{C}$:

$\geq 5 \times 10^5 \text{ M}\Omega$

(mean value: $1 \times 10^6 \text{ M}\Omega$)

Measuring voltage: 100 V/1 min.

Test voltage: $2 U_r$, 2 sec.

Dissipation factors at $+20^{\circ}\text{C}$: $\tan \delta$

at f	$C \leq 0.022 \mu\text{F}$
1 kHz	$\leq 3 \times 10^{-3}$
10 kHz	$\leq 5 \times 10^{-3}$
100 kHz	$\leq 8 \times 10^{-3}$

Maximum pulse rise time:

1000 V/ μ sec for pulses equal to the rated voltage

Mechanical Tests

Pull test on leads:

10 N in direction of leads according to IEC 60068-2-1

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6


Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Capacitance change versus temperature (f = 1 kHz) (general guide)

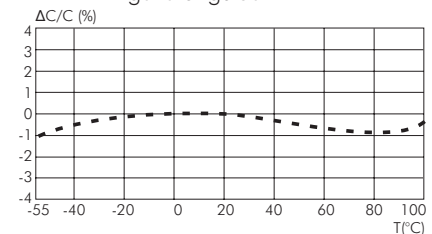

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^{\circ}\text{C}$ for DC voltages and from $+75^{\circ}\text{C}$ for AC voltages

Reliability:

Operational life > 300 000 hours

Failure rate < 5 fit ($0.5 \times U_r$ and 40°C)

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.