
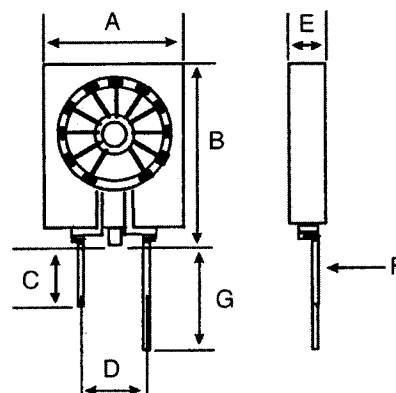


Line Chokes WE-ZB Selfs de protection WE-ZB

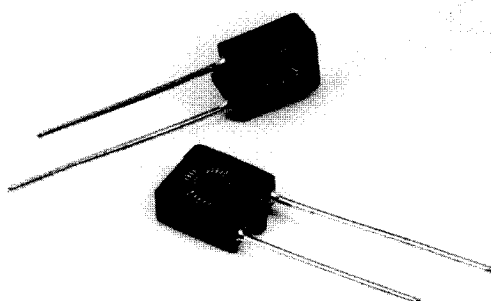

4

- Broadband screening
- Particularly suitable for video signals
- Use in computer periphery-devices such as scanners, modems . . .
- Inductivity tolerance: 35%–50%
- Advantages comp. to 6-hole-ferrite beads: higher data safety in transmission by determination of inductivity tolerance
- Insulation voltage: 200 V (one minute against the housing)

- Déparasitage dans une gamme de fréquence étendue
- Inductance tolérance: 35 % - 50 %
- Avantages par rapport aux VK200: sécurité du signal plus importante assurée par une tolérance de l'inductance définie
- Tension d'isolement: 200 V (1 minute contre chassis)
- Filtre avec core bobiné haute performance et support plastique pour faciliter le montage sur un circuit imprimé

A	B	C	D	E	F	G
8,0	9,5	15,0	5,3	3,5	0,6	19,5

Order Code	Inductance	Impedance	Rated Voltage	DC Resistance	rated current	Qty
Référence	Inductance	Impédance	Tenue en Tension (V)	Résistance DC (mΩ)	Courant nominal max. (mA)	Emb.
	(μH)	à 100 MHz (Ω)				
742 794 00	4,7	500	50	< 15	500	2000
742 794 01	8,2	650	50	< 15	500	2000
742 794 02	10	800	50	< 20	500	2000
742 794 03	22	1300	50	< 25	500	2000
742 794 04	33	1660	50	< 25	500	2000
742 794 05	40	2000	50	< 30	500	2000
742 794 051	47	2200	50	< 32	500	2000
742 794 06	56	2600	50	< 45	500	2000
742 794 061	60	2700	50	< 48	500	2000
742 794 07	82	3100	50	< 52	500	2000
742 794 08	100	3800	50	< 85	500	2000
742 794 09	120	4250	50	< 95	500	2000

Design on customer's requests / Autres produits sur demande

