


SPECIFICATION:


ELECTRICAL: Impeadance 50 ohm Nominal
 Frequency range 0-4 GHZ
 Voltage rating 500 Volts peak
 Dielectric with
 standing Voltage 1500 Volts RMS
 VSWR 1.3 Max 0-4 GHZ
 Contact Resistance:
 Inter Contact: 6 Milliohms (Max)
 Outer Contact: 3 Milliohms (Max)
 Insulation Resistance: 500 Mega Ohms (Min)

MECHANICAL:





Operating Temperature: -55°C to +85°C
 Durability: 500 Cycles




PANEL HOLE

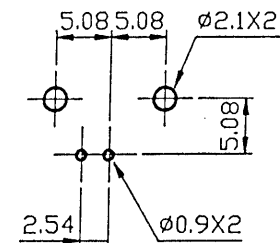


P.C.B. CONFIGURATION

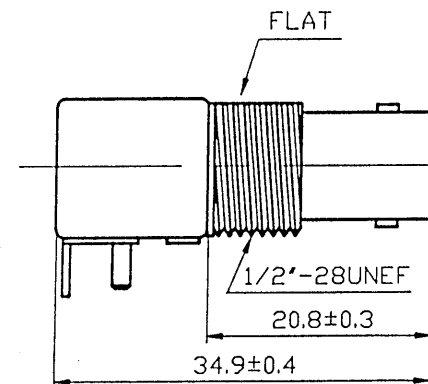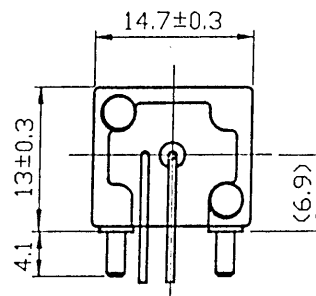

6	PIN	PHOSPHOR BRONZE		GOLD
5	INSULATION	POLYPROPYLENE		NONE
4	WASHER	BRASS	1	NICKEL
3	NUT	BRASS	1	NICKEL
2	BODY	ZINC	1	NICKEL
1	MOUNTING POST	BRASS	4	TIN
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

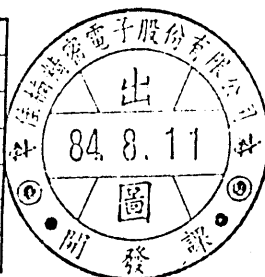

製圖	DRAW	TOLERANCE	品名	13-60-6 (50Ω)	DATE	84.08.10	版次	REV.
檢圖	CHECK	× × ±0.2	TITLE	13-60-6 (50Ω)	DATE	84.08.10	版次	A-0
認圖	APPROVAL	× × × ±0.05	單位	mm	DWG. NO.	13-0318		
	余賢德	ANGLE ±5°	比例	2:1				

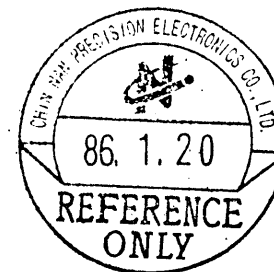

(251094)

佳楠精密電子股份有限公司
 CHIN NAN PRECISION ELECTRONICS CO., LTD.