


Product Dimensions

Style		MBA 0204	MBB 0207	MBE 0414
		UXA 0204	UXB 0207	
			CBB 0207	
DIN - Size		0204	0207	0414
CECC - Size		A	B	D
D	mm	max 1,6	max 2,5	max 4,0
L	mm	max 3,6	max 6,3	max 11,9
d	mm	0,5	0,6	0,8
l	mm	min 29,0	min 28,0	min 31,0
M	mm	min 5,0	min 7,5	min 15,0
Weight	g	0,13	0,22	0,75

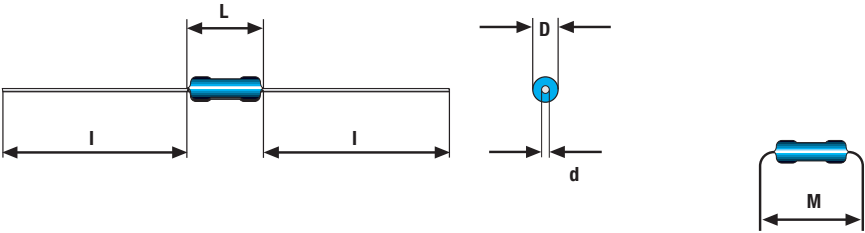


Coding

Style	MBA 0204	MBB 0207	MBE 0414	CBB 0207
Product Coding vs. Tolerance				
5 %	4 bands	4 bands	4 bands	5 bands
2 %	4 bands	–	–	
1 %	5 bands	5 bands	5 bands	
0,5 %	5 bands	5 bands	5 bands	
0,25 %	5 bands	5 bands	5 bands	
0,1 %	5 bands	5 bands	5 bands	
Jumpers are marked by a black colour band				
Colour Dot Markings				
–	–	–	–	brown dots
TC 50	none	none	none	
TC 25	yellow dots	yellow dots	yellow dots	
TC 15	orange dots	orange dots	orange dots	
TC 10	blue dots	blue dots	blue dots	
TC 05	violet dots	violet dots	violet dots	
HF	black dots	–	–	

According to IEC 60 062

Style	UXA 0204	UXB 0207
Value Coding	5 or 6 digits	5 or 6 digits
Tolerance Coding		
1 %	F	F
0,1 %	B	B
0,05 %	A	A
0,01 %	T	T
TC Coding		
0 ± 15 ppm/K	F	F
0 ± 10 ppm/K	B	B
0 ± 05 ppm/K	A	A
0 ± 02 ppm/K	T	T

Order Code Example

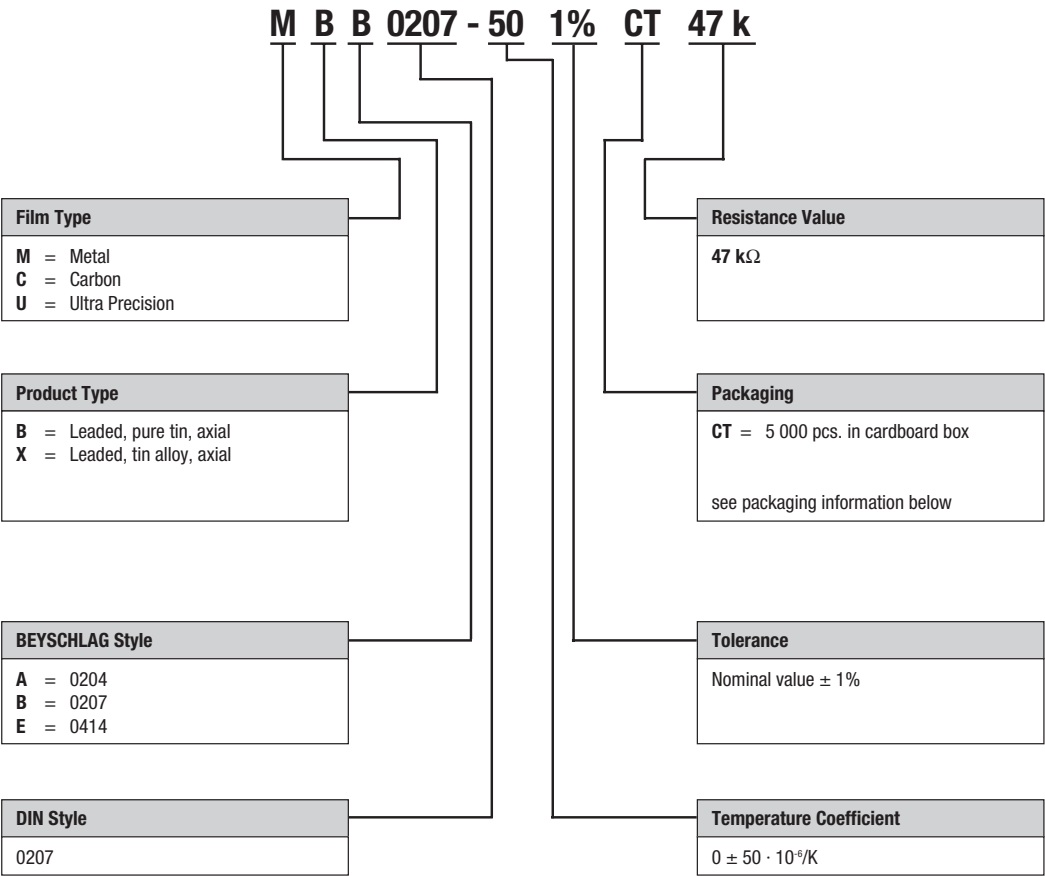

Jumpers are ordered by the resistance value 0 Ω, e.g. **MBB 0207 CT 0R0**.
For **CBB 0207** no temperature coefficient is specified.


Packaging Information

Style			MBA 0204	MBB 0207	MBE 0414	CBB 0207
			UXA 0204	UXB 0207		
Reel Pack	RP	pcs.	5 000	5 000	–	–
Cardboard Box	none	pcs.	1 000	1 000	1 000	1 000
Cardboard Box	CT	pcs.	5 000	5 000	–	5 000

Taping


Style		MBA 0204	MBB 0207	MBE 0414
		UXA 0204	UXB 0207	
			CBB 0207	
C	mm	max 1,0	max 1,1	max 1,3
g	mm	$65 \pm 2,0$	$65 \pm 2,0$	$75 \pm 2,0$
b	mm	$53 \pm 2,0$	$53 \pm 2,0$	$63 \pm 2,0$
f	mm	min 23,3	min 22,0	min 25,2
L	mm	max 3,6	max 6,3	max 11,9
E	mm	$6,0 \begin{smallmatrix} + 0,5 \\ 0 \end{smallmatrix}$		
S	mm	$5,0 \pm 0,5$		

According to IEC 60 286-1

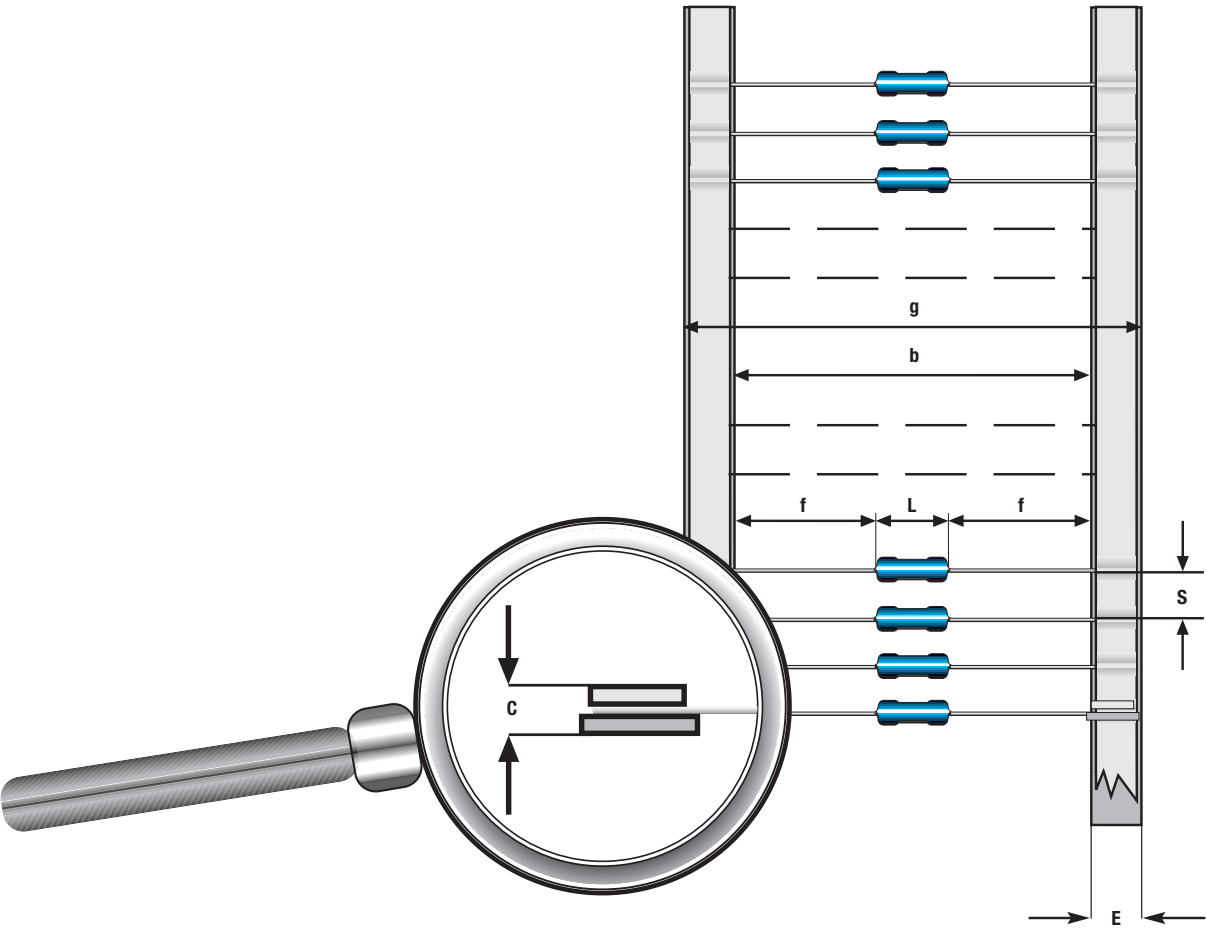

Cardboard Box

Style		MBA 0204	MBB 0207	MBE 0414
		UXA 0204	UXB 0207	
			CBB 0207	
Order Code : none				
L	mm	187	187	378
H	mm	30	40	88
B	mm	75	75	45
Weight	g	160	260	770
Order Code : CT				
L	mm	330	330	–
H	mm	55	85	–
B	mm	75	75	–
Weight	g	720	1 220	–

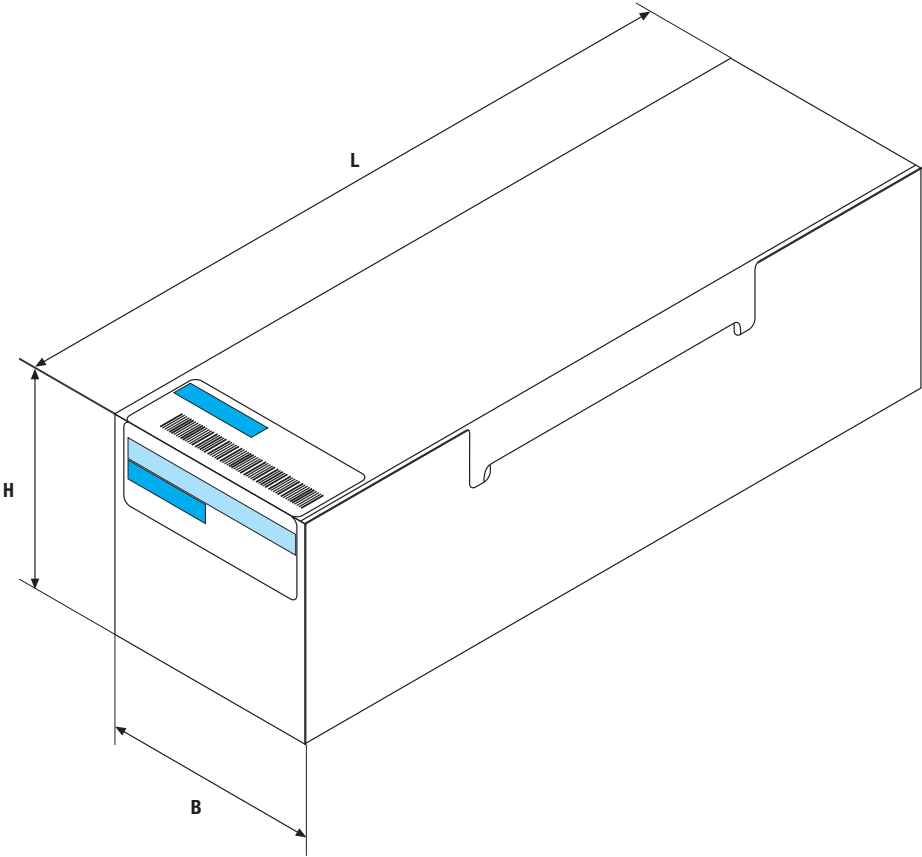

Reel

Style

MBA 0204

MBB 0207

UXA 0204

UXB 0207

CBB 0207

Order Code: RP

A

mm

80

D

mm

80

H

mm

70

B

mm

242

315

C

mm

26

Weight

g

1 000

1 630

According to IEC 60 286-1

