

#### Description

- Surface mount inductors, 4.0mm height, designed for higher speed switch mode applications requiring low voltage and high current
- 155°C maximum total operating temperature
- Design utilizes high temperature powder iron material with a non-organic binder to eliminate thermal aging
- Inductance offering expanded for applications requiring higher inductance.
- Inductance Range from 0.175 uH to 47.3 uH
- Current Range from 39.0 to 2.4 Amps
- Frequency Range 1kHz to 500kHz
- RoHS compliant (-R option)

#### Applications

- Next generation microprocessors
- High current DC-DC converters
- VRM, multi-phase buck regulator
- PC, Workstations, Routers
- Telecom soft switches, Base Stations

#### Environmental Data

- Storage temperature range: -40°C to +155°C
- Operating ambient temperature range: -40°C to +155°C (range is application specific)
- Infrared reflow temperature: +260°C for 10 seconds maximum



#### Packaging

- Supplied in tape and reel packaging, 800 parts per reel

OPTION CODE	
Option Code	Description
-R	RoHS compliant version


Part Number	Rated Inductance $\mu\text{H}$	OCL (1) nominal $\pm 20\%$ $\mu\text{H}$	I <sub>rms</sub> (2) Amperes (Typ.)	Isat (3) Amperes 15% rolloff	Isat (4) Amperes 30% rolloff	DCR (m $\Omega$ ) max. @ 20°C	Volts (5) $\mu\text{Sec}$ (V $\mu\text{S}$ ) (ref.)
HC8-R15	0.15	0.175	39.0	43	76	0.80	1.5
HC8-R39	0.39	0.390	28.3	26	45	1.55	2.5
HC8-R75	0.75	0.766	18.8	18.5	32.7	3.40	3.5
HC8-1R2	1.2	1.32	16.0	14.4	25.5	4.70	4.5
HC8-1R9	1.9	1.90	12.4	11.8	20.9	7.7	5.5
HC8-2R6	2.6	2.65	10.2	10.0	17.7	11.4	6.5
HC8-3R5	3.5	3.52	8.50	8.7	15.3	16.5	7.5
HC8-4R5	4.5	4.52	8.00	7.7	13.5	18.6	8.5
HC8-5R6	5.6	5.65	6.70	6.9	12.1	26.3	9.5
HC8-6R9	6.9	6.90	6.40	6.2	10.9	28.9	10.5
HC8-8R2	8.2	8.27	5.50	5.7	10.0	39.6	11.5
HC8-100	10.0	9.77	5.20	5.2	9.2	43.6	12.5
HC8-150	15.0	15.02	4.10	4.2	7.4	68.6	15.5
HC8-220	22.0	21.40	3.40	3.5	6.2	99.5	18.6
HC8-330	33.0	31.65	2.70	2.9	5.1	154	22.6
HC8-470	47.0	47.28	2.20	2.4	4.2	237	27.6

- 1) Test Parameters: 100KHz, 1.0V<sub>rms</sub>
- 2) I<sub>rms</sub> Amperes for approximately  $\Delta T$  of 40°C above 85°C ambient
- 3) Isat Amperes Peak for approximately 15% rolloff (@20°C)
- 4) Isat Amperes Peak for approximately 30% rolloff (@20°C)
- 5) Applied Volt-Time product (V- $\mu\text{S}$ ) across the inductor. This value represents the applied V- $\mu\text{S}$  at operating frequency necessary to generate additional core loss which contributes to the 40°C temperature rise. De-rating of the I<sub>rms</sub> is required to prevent excessive temperature rise. The 100% V- $\mu\text{S}$  rating is equivalent to a ripple current I<sub>p-p</sub> of 20% of Isat (30% rolloff option).


It is recommended that the temperature of the part not exceed 155°C under worst case operating conditions verified in the end application.

Part number definition:  
 First 3 characters = Product code and size.  
 Last 3 characters = Inductance in  $\mu\text{H}$ . R = decimal point.  
 If no R is present third character = # of zeros.  
 wwllly = (Date Code)  
 R = (Revision level)

#### Mechanical Diagrams

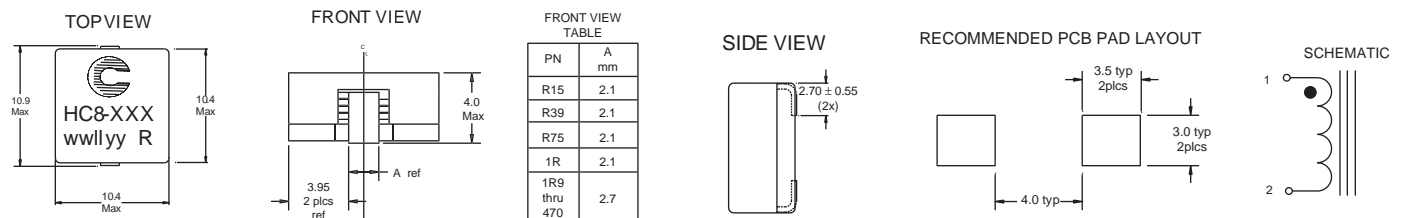


## Packaging Information

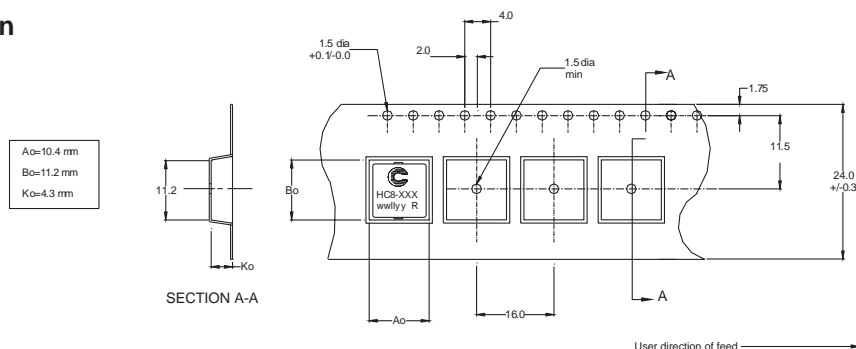

Dimensions in Millimeters

## Rolloff

### OCL vs Isat

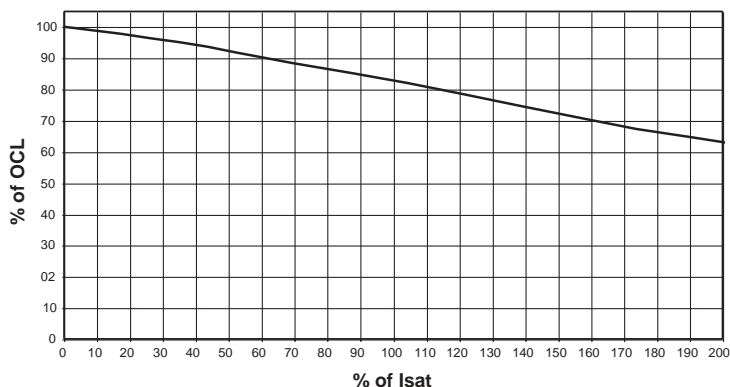

## Core Loss

## Irms DERATING WITH CORE LOSS

