

Description

- Four sizes of shielded drum core inductors
- Inductance range from 0.33uH to 1000uH
- Current range up to 56 Amps peak
- Frequency range up to 3MHz
- Magnetic shielding
- Secure mounting

Applications

- Computer, DVD players, and portable power devices
- LCD panels
- DC-DC converters
- Buck, boost, forward, and resonant converters
- Noise filtering and filter chokes

Environmental Data

- Storage temperature range: -40C to +125C
- Operating ambient temperature range: -40C to +85C (range is application specific). The internal "hot-spot" temperature defines the maximum allowable currents, which are limited to 130C, including ambient.
- Infrared reflow temperature: +240C for 30 seconds max.



Packaging

- Supplied in tape and reel packaging, 1350 (DR73), 1100 (DR74), 600 (DR125), and 350 (DR127) per reel

Part Number	Rated Inductance (μH)	OCL ⁽¹⁾ +/-20% (μH)	I _{rms} ⁽²⁾ Amperes	I _{sat} ⁽³⁾ Amperes Peak	DCR ⁽⁴⁾ (Ω) Typ.	Volt-uSec ⁽⁵⁾ Typ.
DR73-R33	0.33	0.306	6.21	14.4	0.0073	1.98
DR73-1R0	1.00	0.992	5.28	7.97	0.0102	3.56
DR73-1R5	1.50	1.482	4.67	6.52	0.0130	4.36
DR73-2R2	2.20	2.070	4.15	5.52	0.0165	5.15
DR73-3R3	3.30	3.540	3.31	4.22	0.0259	6.73
DR73-4R7	4.70	4.422	3.09	3.78	0.0297	7.52
DR73-6R8	6.80	6.480	2.55	3.12	0.0435	9.11
DR73-8R2	8.20	8.930	2.19	2.66	0.0592	10.7
DR73-100	10.0	10.30	2.08	2.47	0.0656	11.5
DR73-150	15.0	15.01	1.83	2.05	0.0844	13.9
DR73-220	22.0	22.65	1.62	1.67	0.107	17.0
DR73-330	33.0	34.41	1.31	1.35	0.166	21.0
DR73-470	47.0	48.62	1.08	1.14	0.241	24.9
DR73-680	68.0	68.91	0.89	0.96	0.358	29.7
DR73-820	82.0	80.37	0.86	0.89	0.384	32.1
DR73-101	100	101.4	0.73	0.79	0.527	36.0
DR73-151	150	150.9	0.58	0.65	0.851	44.0
DR73-221	220	223.3	0.52	0.53	1.05	53.5
DR73-331	330	325.5	0.42	0.44	1.59	64.5
DR73-471	470	465.8	0.35	0.37	2.36	77.2
DR73-681	680	676.5	0.29	0.31	3.47	93.1
DR73-821	820	821.7	0.27	0.28	3.93	103
DR73-102	1000	995.0	0.26	0.25	4.34	113
DR74-R33	0.33	0.294	6.26	18.4	0.0074	1.71
DR74-1R0	1.00	0.952	5.39	10.2	0.0099	3.08
DR74-1R5	1.50	1.422	4.94	8.35	0.0118	3.76
DR74-2R2	2.20	1.986	4.76	7.06	0.0126	4.45
DR74-3R3	3.30	3.396	3.94	5.40	0.0183	5.81
DR74-4R7	4.70	5.182	3.34	4.37	0.0254	7.18
DR74-6R8	6.80	7.344	2.60	3.67	0.0418	8.55
DR74-8R2	8.20	8.566	2.53	3.40	0.0441	9.23
DR74-100	10.0	9.882	2.41	3.17	0.0489	9.92
DR74-150	15.0	16.09	2.11	2.48	0.0637	12.7
DR74-220	22.0	21.73	1.75	2.13	0.0925	14.7

(1) Open Circuit Inductance Test Parameters: 100KHz, 0.25Vrms, 0.0Adc.

(2) RMS current for an approximate ΔT of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.

(3) Peak current for approximate 30% roll off at 20°C.

(4) DCR limits @ 20°C.

(5) Applied Volt-Time product (V-μS) across the inductor. This value represent the applied V-μS at 100KHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.

Part Number	Rated Inductance (µH)	OCL ⁽¹⁾ +/-20% (µH)	I _{rms} ⁽²⁾ Amperes	I _{sat} ⁽³⁾ Amperes Peak	DCR ⁽⁴⁾ (Ω) Typ.	Volt-µSec ⁽⁵⁾ Typ.
DR74-330	33.0	33.01	1.41	1.73	0.143	18.1
DR74-470	47.0	49.64	1.15	1.41	0.216	22.2
DR74-680	68.0	69.67	1.03	1.19	0.265	26.3
DR74-820	82.0	80.95	0.91	1.11	0.345	28.4
DR74-101	100	101.6	0.86	0.99	0.383	31.8
DR74-151	150	150.0	0.69	0.81	0.591	38.6
DR74-221	220	227.0	0.56	0.66	0.907	47.5
DR74-331	330	335.6	0.45	0.54	1.41	57.8
DR74-471	470	465.3	0.40	0.46	1.74	68.1
DR74-681	680	671.2	0.33	0.38	2.58	81.7
DR74-821	820	812.7	0.31	0.35	2.93	89.9
DR74-102	1000	1009	0.27	0.31	3.89	100
DR125-R47	0.47	0.456	17.6	33.0	0.0018	3.17
DR125-1R0	1.00	0.894	15.0	23.6	0.0024	4.43
DR125-1R5	1.50	1.478	13.8	18.3	0.0029	5.70
DR125-2R2	2.20	2.208	10.9	15.0	0.0045	6.97
DR125-3R3	3.30	3.084	9.26	12.7	0.0063	8.23
DR125-4R7	4.70	5.274	7.18	9.71	0.0105	10.8
DR125-6R8	6.80	6.588	6.64	8.68	0.0123	12.0
DR125-8R2	8.20	8.048	5.54	7.86	0.0176	13.3
DR125-100	10.0	9.654	5.35	7.17	0.0189	14.6
DR125-150	15.0	15.35	4.27	5.69	0.0298	18.4
DR125-220	22.0	22.36	3.70	4.71	0.0396	22.2
DR125-330	33.0	33.74	3.28	3.84	0.0505	27.2
DR125-470	47.0	47.47	2.71	3.24	0.0740	32.3
DR125-680	68.0	67.91	2.22	2.70	0.101	38.6
DR125-820	82.0	86.89	2.05	2.39	0.128	43.7
DR125-101	100	102.7	1.78	2.20	0.170	47.5
DR125-151	150	151.1	1.48	1.81	0.248	57.6
DR125-221	220	216.8	1.19	1.51	0.384	69.0
DR125-331	330	332.6	1.06	1.22	0.482	85.5
DR125-471	470	473.1	0.87	1.02	0.718	102
DR125-681	680	679.8	0.70	0.85	1.10	122
DR125-821	820	828.0	0.60	0.77	1.49	135
DR125-102	1000	1008	0.57	0.70	1.69	149
DR125-124	120000	120630	0.060	0.069	150	1521
DR127-R47	0.47	0.419	17.9	56.0	0.00195	3.50
DR127-1R0	1.00	0.821	15.5	40.0	0.00313	4.90
DR127-1R5	1.50	1.357	13.5	31.1	0.00341	6.30
DR127-2R2	2.20	2.027	12.5	25.5	0.00402	7.70
DR127-3R3	3.30	2.831	10.5	21.5	0.00567	9.10
DR127-4R7	4.70	4.841	8.25	16.5	0.00917	11.9
DR127-6R8	6.80	7.387	7.34	13.3	0.0116	14.7
DR127-8R2	8.20	8.861	6.32	12.2	0.0157	16.1
DR127-100	10.0	10.47	6.04	11.2	0.0172	17.5
DR127-150	15.0	14.09	5.03	9.66	0.0247	20.3
DR127-220	22.0	22.93	4.00	7.57	0.0391	25.9
DR127-330	33.0	33.92	3.23	6.22	0.0600	31.5
DR127-470	47.0	47.05	2.95	5.28	0.0719	37.1
DR127-680	68.0	66.48	2.44	4.44	0.105	44.1
DR127-820	82.0	79.75	2.09	4.06	0.143	48.3
DR127-101	100	99.31	1.96	3.64	0.163	53.9
DR127-151	150	144.9	1.59	3.01	0.247	65.1
DR127-221	220	221.5	1.29	2.43	0.376	80.5
DR127-331	330	323.6	1.04	2.01	0.574	97.3
DR127-471	470	467.1	0.85	1.68	0.861	117
DR127-681	680	676.7	0.76	1.39	1.08	141
DR127-821	820	818.1	0.65	1.27	1.47	155
DR127-102	1000	1005	0.61	1.14	1.66	172

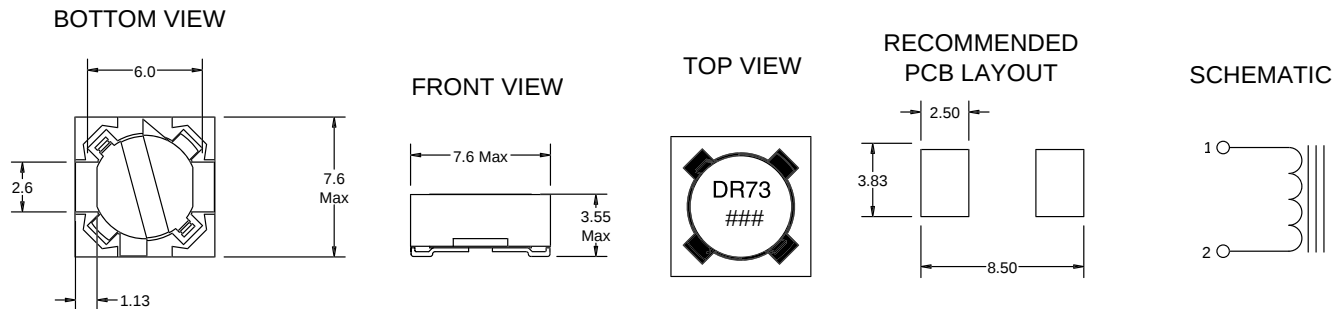
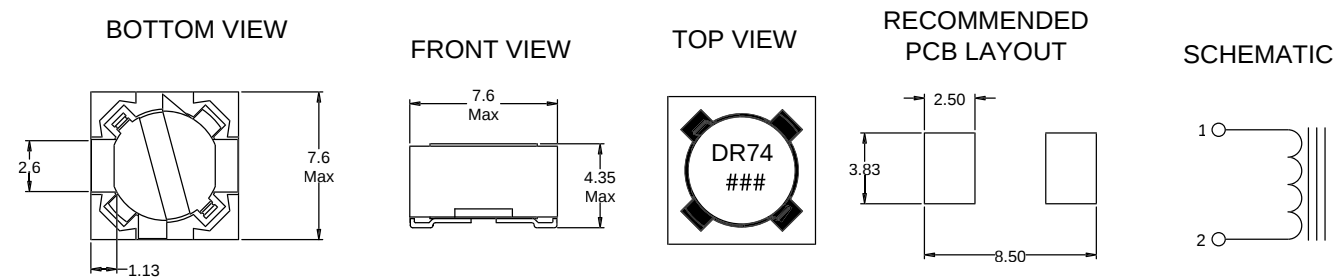
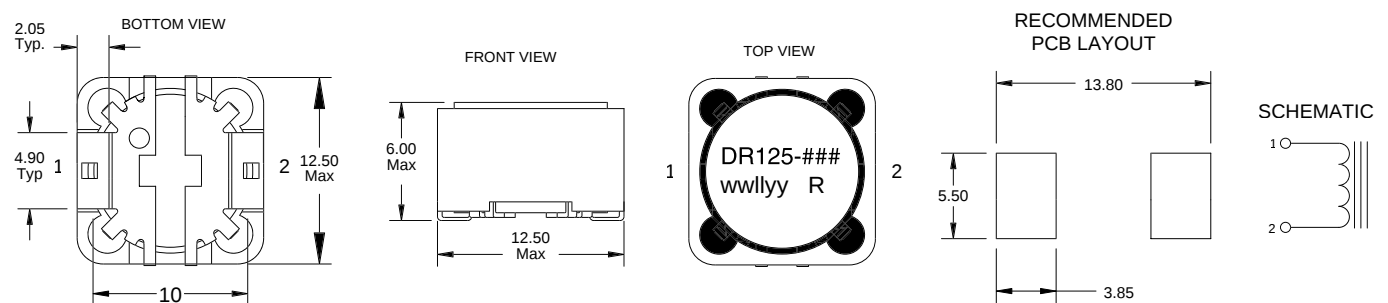
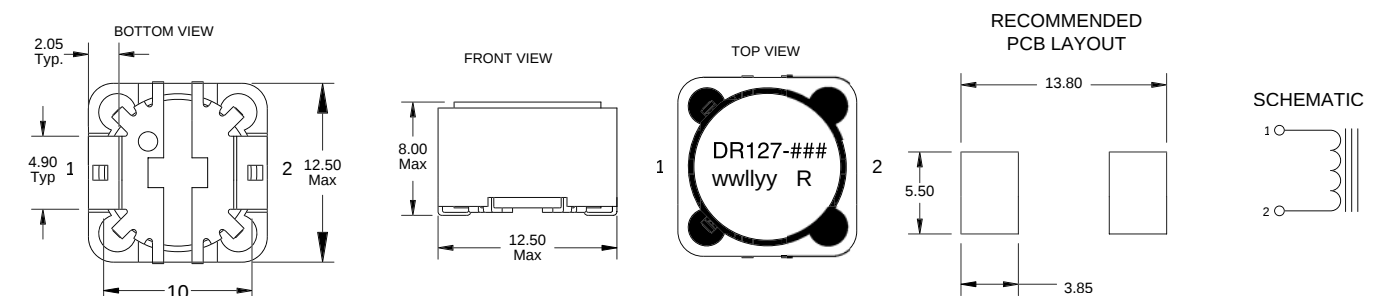
(1) Open Circuit Inductance Test Parameters: 100KHz, 0.25Vrms, 0.0Adc.

(2) RMS current for an approximate ΔT of 40°C without core loss. It is recommended that the temperature of the part not exceed 125°C.

(3) Peak current for approximate 30% roll off at 20°C.

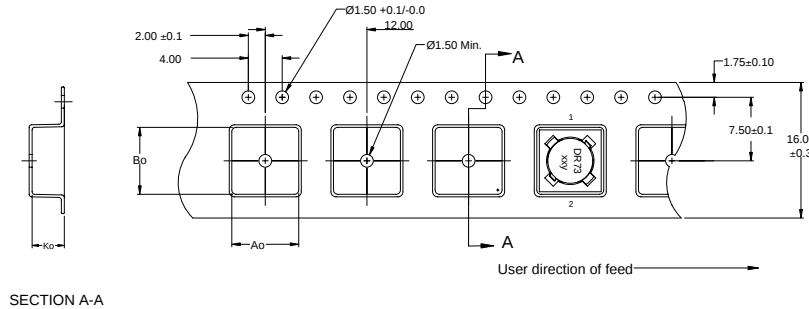
(4) DCR limits @ 20°C.

(5) Applied Volt-Time product (V-µs) across the inductor. This value represent the applied V-µs at 100KHz necessary to generate a core loss equal to 10% of the total losses for 40°C temperature rise.

Mechanical Diagrams
DR73 Series

DR74 Series

DR125 Series

DR127 Series


Dimensions in Millimeters.

= Inductance value per family chart
wwlyy = (date code) R = revision level

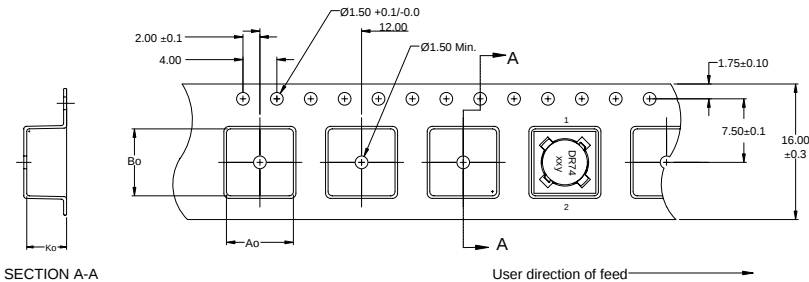
Packaging Information
DR73 Series


Ao=7.90mm
Bo=7.90mm
Ko=3.80mm

SECTION A-A


ACTUAL SIZE
DR73

Parts packaged on 13" Diameter reel,
1,350 parts per reel.

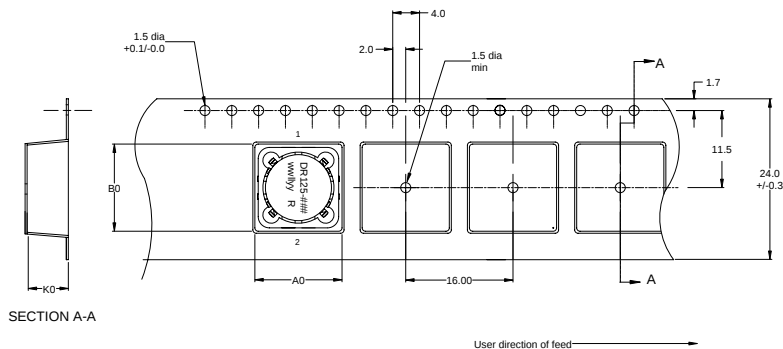
DR74 Series


Ao=7.90mm
Bo=7.90mm
Ko=4.70mm

SECTION A-A


ACTUAL SIZE
DR74

Parts packaged on 13" Diameter reel,
1,100 parts per reel.

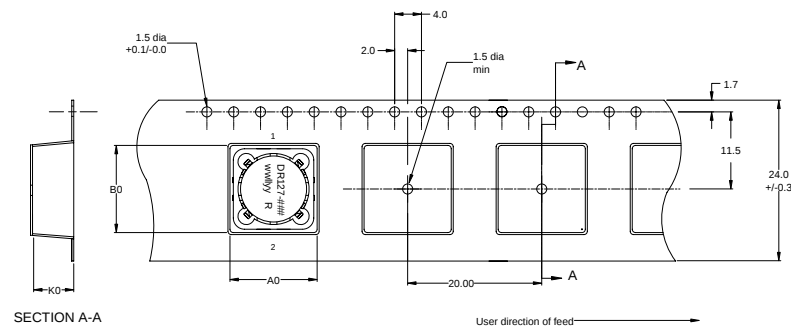
DR125 Series


Ao=13.0mm
Bo=13.0mm
Ko=6.30mm

SECTION A-A


ACTUAL SIZE
DR125

Parts packaged on 13" Diameter reel,
600 parts per reel.

DR127 Series


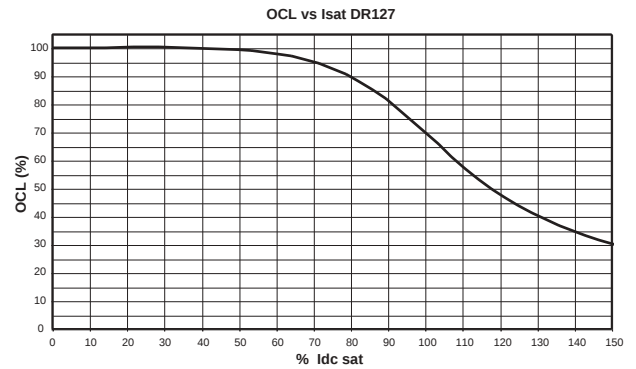
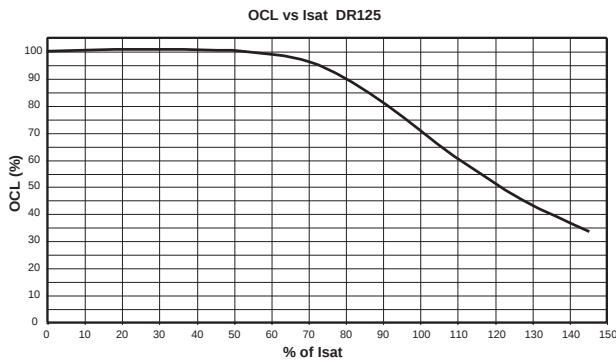
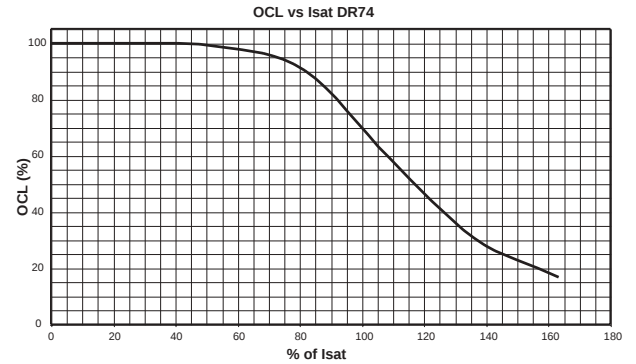
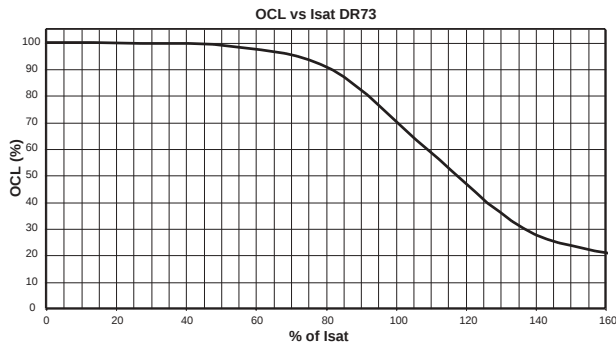
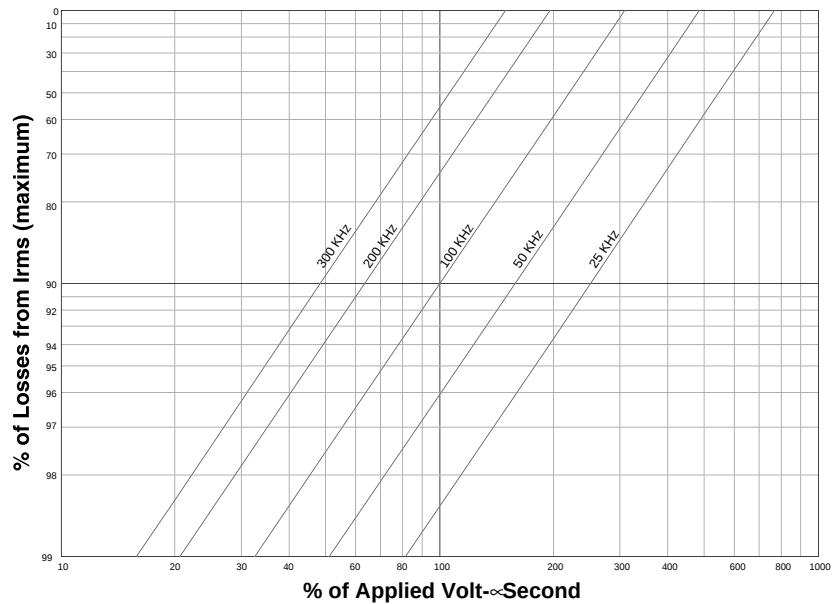
Ao=13.0mm
Bo=13.0mm
Ko=8.30mm

SECTION A-A


ACTUAL SIZE
DR127

Parts packaged on 13" Diameter reel,
350 parts per reel.

Dimensions are in millimeters.

Rolloff**Core Loss****Irms DERATING WITH CORE LOSS**



DR Series
High Power Density,
High Efficiency, Shielded Inductors



PM-4310 2/03

© Cooper Electronic
Technologies 2003

Visit us on the Web at www.cooperET.com

3601 Quantum Boulevard Boynton Beach, Florida 33426-8638

Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

For the very latest product data and news visit angliac.com