

FREQUENCY MIXERS

Surface Mount

LEVEL 7 150 kHz to 7 GHz



ASK-KK81



†JMS



†LRMS-J



†RMS

+7 dBm LO, up to +1 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION dB						LO-IF ISOLATION dB						IP3@ center band Typ. (dBm)	E factor	CASE STYLE	CONNECTION	PCB Lay-out PL	PRICE \$ Qty. (1-9)
	LO/RF f _L -f _U	IF	Mid-Band		Total Range	L	M	U	L	M	U													
			$\bar{x}$	σ								Max.	Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.						
ASK-1-KK81	1-600	DC-600	5.58	.06	7.0	8.5	50	30	35	25	30	20	45	35	30	20	25	15	14	0.7	KK81	w	082	6.95
† ASK-2-KK81	1-1000	DC-1000	6.79	.10	8.0	9.8	60	40	35	18	26	16	50	30	25	17	15	10	12	0.5	KK81	w	082	8.25
JMS-1	2-500	DC-500	5.75	.10	7.0	8.0	55	50	45	30	40	25	55	45	45	25	32	20	16	0.9	BH292	ht	052	4.95
JMS-2	20-1000	DC-1000	7.0	.15	8.4	9.5	63	40	50	28	35	20	56	30	47	22	37	20	17	1.0	BH292	ht	052	7.45
JMS-2W	5-1200	DC-500	6.8	.10	8.0	9.0	60	40	60	30	37	20	60	40	48	20	31	15	17	1.0	BH292	ht	052	7.95
JMS-11X	5-1900	5-1000	6.7	.15	8.2	9.8	58	45	35	20	27	18	56	45	37	20	27	20	9	0.2	BH292	hu	052	4.25***
◆ LRMS-1J	0.5-500	DC-500	5.94	.05	7.0	8.5	55	50	33	25	27	20	55	45	30	23	24	19	15	0.8	QQQ569	w	083	6.25
◆ LRMS-2J	5-1000	DC-1000	6.67	.26	8.0	9.5	60	40	40	20	25	18	55	30	30	20	20	12	16	0.9	QQQ569	w	083	6.95
◆ LRMS-5J	5-1500	DC-1000	5.92	.34	7.5	9.5	60	40	40	20	30	18	55	30	30	18	15	8	12	0.5	QQQ569	w	083	13.95
◆ LRMS-30J	200-3000	DC-1000	6.8	.30	9.0	9.8	30 (typ.)		17 (min.)				27 (typ.)		7 (min.)				14	0.7	QQQ569	w	083	7.95***
RMS-1	0.5-500	DC-500	5.94	.05	7.0	8.5	55	50	33	25	27	20	55	45	30	23	24	19	20	1.3	TT240	w	052	6.25
RMS-1W	2-750	DC-750	5.83	.21	7.5	8.5	70	45	45	28	38	22	60	45	40	25	30	20	17	1.0	TT240	w	052	6.75
RMS-2	5-1000	DC-1000	6.67	.26	8.0	9.5	60	40	40	20	25	18	55	30	30	20	20	12	17	1.0	TT240	w	052	6.95
RMS-2D	5-1000	DC-1000	6.81	.06	8.0	100	59	40	40	30	33	22	55	30	40	22	30	20	17	1.0	TT240	w	052	7.25
RMS-2U	10-1000	10-750	6.79	.16	8.0	9.5	55	40	40	30	30	25	55	30	35	25	30	22	10	0.3	TT240	w	052	11.45
RMS-5	5-1500	DC-1000	5.92	.34	7.5	9.5	60	40	40	20	30	18	55	30	30	18	15	8	13	0.6	TT240	w	052	13.95
⊙ RMS-11F	350-2000	DC-400	5.5	.20	7.0	9.2	37	26	36	20	32	20	22	14	29	20	28	20	12	0.5	TT240	w	052	4.95***
RMS-11X	5-1900	5-1000	7.1	.10	8.2	9.8	58	45	35	20	27	18	56	45	37	20	27	20	10	0.3	TT240	gk	052	3.95***
RMS-30	200-3000	DC-1000	6.5	.20	9.0	9.8	27 (typ.)		17 (min.)				20 (typ.)		7 (min.)				11	0.4	TT240	w	052	6.95***

E = [IP3(dBm) - LO Power(dBm)]/10

L=low range [f_L to $10f_L$]

M=mid range [$10f_L$ to $f_U/2$]
m = mid band [f_L to $f_U/2$]

U=upper range [$f_U/2$ to f_U]

NOTES

- ⌘ Average of conversion loss at center of mid-band frequency ($f_L + f_U/4$)
- σ Standard deviation
- ◆ Aqueous washable. For non-aqueous requirements, LRMS units available in case style QQQ130
- † Phase detection, positive polarity
- ⊗ Frequency ranges specified: m = 350-1000MHz, L = 350-750MHz, M = 750-1000MHz, U = 1000-2000MHz
- *** Price for quantities 10-49
- A. Environmental specifications and re-flow soldering information available in General Information Section.
- B. Units are non-hemetic unless otherwise noted. For details on case dimensions & finishes see "Case Styles & Outline Drawings".
- C. Prices and Specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. RF power, 50mW
 - 1b. Peak IF current, 40mA

NSN GUIDE

MCL NO.

LRMS-1
RMS-1
RMS-2
SCM1-2500NL
SCM1-1NL

NSN

5895-01-477-4173
5895-01-415-6798
5895-01-447-3489
6625-01-447-4768
5895-01-374-9561




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

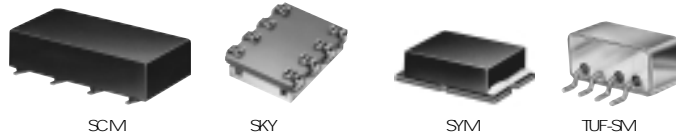

+7 dBm LO, up to +1 dBm RF


MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION dB					LO-IF ISOLATION dB					IP3@ center band Typ. (dBm)	E factor	CASE STYLE	CONNECTION	PCB Lay-out PL	PRICE \$ Qty. (1-9)		
	LO/RF f _L -f _U	IF	Mid-Band			Total Range Max.	L Typ.	M Min.	M Typ.	U Min.	U Typ.	L Typ.	M Min.	M Typ.	U Min.	U Typ.								
			x	m σ	Max.																			
SCM1	1-500	DC-500	5.72	.10	7.0	8.0	60	40	45	35	40	30	50	40	45	35	40	25	10	O3	YY101	d	O34	4.25
SCM2	5-1000	DC-500	5.76	.08	8.3	9.8	50	40	40	25	35	20	55	30	40	25	30	18	11	O4	YY101	k	132	5.45
SCM-2500	500-2500	DC-500	5.88	.08	6.9	10.0	35	22	35	22	35	22	18	12	18	12	18	12	13	O6	YY101	r	130	11.95
SKY-7G	2000-7000	DC-1000	7.0	.10	—	9.8	28 (typ.) 15 (min.)					20 (typ.) 7 (min.)					11	O4	BJ398	je	O66	16.95		
SKY-42	2000-4200	DC-1200	5.0	.30	—	8.5	31 (typ.) 20 (min.)					17 (typ.) 12 (min.)					9	O2	BJ398	je	O66	14.95		
SKY-60	2500-6000	DC-1500	6.2	.20	—	9.7	28 (typ.) 17 (min.)					14 (typ.) 8 (min.)					11	O4	BJ398	je	O66	14.95		
SYM2	2-1000	DC-1000	5.4	.10	7.2	9.5	70	45	50	30	40	25	63	40	48	24	37	20	17	1.0	TT166	x	O79	11.95
SYM11	1-2500	10-600	7.0	.30	9.0	10.5	63	40	40	24	34	20	61	40	35	20	28	15	10	O3	TT167	x	O79	9.95
SYM12	5-1200	DC-1000	6.5	.30	8.0	9.0	68	45	50	30	37	25	56	40	46	25	29	18	16	O9	TT167	x	O79	9.45
SYM-2500	1-2500	DC-500	6.5	.10	8.5	9.8	70	50	50	25	36	20	60	45	30	10	16	8	12	O5	TT167	x	O79	11.95
TUF-1SM	2-600	DC-600	5.85	.04	7.0	8.0	60	50	42	30	37	25	60	45	47	30	36	22	16	O9	NNN150	z	O81	5.25
TUF-2SM	50-1000	DC-1000	5.85	.07	7.5	9.0	58	40	47	30	42	25	50	35	44	20	29	18	16	O9	NNN150	z	O81	6.20
TUF-3SM	0.15-400	DC-400	4.7	.02	7.0	8.0	60	50	46	30	35	25	60	40	47	25	35	20	11	O4	NNN150	z	O81	7.05
TUF-5SM	20-1500	DC-1000	5.7	.04	9.0	9.0	54	40	42	30	39	25	40	25	32	18	23	8	12	O5	NNN150	z	O81	10.45

L=low range [f_L to $10f_L$]

M=mid range [$10f_L$ to $f_U/2$]

U=upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]

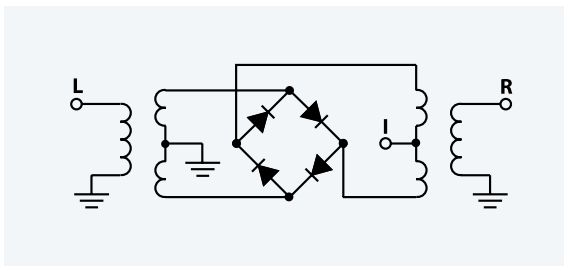

pin connections see case style outline drawings

PORT	d	k	r	w	x	z	gk	ht ¹	hu ²	hp	je
LO	8	8	1	1	2	4	1	6	6	5	1
RF	1	1	8	4	1	1	5	3	2	1	5
IF	34 [^]	3	3	5	3	2	4	2	3	7	7
GND EXT.	2567	2567	24567	236	456	3	236	1,45	1,45	23468	23468
CASE GND	—	—	—	—	—	3	—	—	—	—	—
NOT USED	—	4	—	—	—	—	—	—	—	—	—
DEMO BOARD	TB-170	TB-172	TB-171	TB-03	TB-12	TB-201		TB-03		TB-11	TB-11

[^] pins must be connected together externally

¹ pin connection physically same as w

² pin connection physically same as gk



The Design Engineers Search Engine
Provides Actual Data Instantly
At <http://www.minicircuits.com>

In Stock... Immediate Delivery
For Custom Versions Of Standard Models
Consult Our Applications Dept.



```
PC-Name: PC-TEAM1-004
Benutzername: skarzell
```

TT240^(inch)_{mm}[illegible]

Tolerance: .x $\pm$.1 .xx $\pm$.03 .xxx $\pm$.015 inch.


Notes:

- Material and Finish:
 - Case material: ceramic.


Termination Finish: For RoHS Models: - Gold Plate Over Nickel.

For Non-RoHS Models: - Tin/Lead Plate or Gold Plate Over Nickel. Board edges straight.

- Packaging

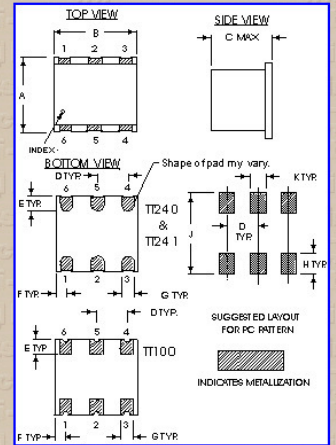

UNIT ORIENTATION



Packaging information:

Tape Width (mm): 16.0
Reel Size (inches): 13.0
Device Cavity Pitch (mm): 12.0
Devices Per Reel: 500

[Back](#)