

Size 0603 (EIA) and/or 1608 (IEC)
Rated inductance 1,0 to 220 nH
Rated current 70 to 500 mA



Construction

- Copper-plated ceramic core
- Laser-cut winding, epoxy-coated

Features

- Extremely close tolerance of dimensions
- High resonance frequency
- Free of polarization effect
- Close inductance tolerance
- High mechanical stability
- Suitable for reflow (IR and vapor phase) and wave soldering

Applications

Resonant circuits, impedance matching for

- Mobile phones
- DECT systems
- Keyless entry
- GPS (Global Positioning System)
- Video cameras

Terminals

- Electro-plated, 2 μm Ni, 10 μm Sn (lead-free)
- Base material Al_2O_3 ceramic with Cu layer

Marking

No marking on component

Minimum data on reel:

Manufacturer, part number, ordering code,
 L value and tolerance of L value,
quantity, date of packing

Delivery mode

8-mm cardboard tape, wound on 180-mm $\varnothing$ reel

Bulk case on request


For details on taping, packing and packing units [see page 151](#)




General technical data

Rated inductance L_R	Measured with impedance analyzer HP 4291A at frequency f_L
Q factor $Q_{\min}$, Q_{typ}	Measured with impedance analyzer HP 4291A, $Q_{\min}$ measured at frequency f_Q
Rated current I_R	Maximum permissible dc with a temperature increase of ≤ 15 K at rated temperature of 125°C
Self-resonance frequency $f_{\text{res, min}}$	Measured with network analyzer HP 8720
DC resistance R_{max}	Measured at 20°C ambient temperature, measuring current $< I_R$
Climatic category	In accordance with IEC 60068-1 55/125/56 ($-55^\circ\text{C}/+125^\circ\text{C}/56$ days damp heat test)
Solderability	In accordance with IEC 60062-2-58 (215 ± 3) $^\circ\text{C}$, ($3 \pm 0,3$) s Wetting of soldering area: ≥ 95 %
Resistance to soldering heat	In accordance with IEC 60068-2-20 260°C , 10 s $\Delta L/L \leq \pm 3$ %
Permissible PCB bending	2 mm (100 mm long standard PCB)
Weight	Approx. 4 mg

Dimensional drawing

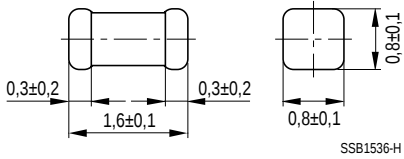

Layout recommendation

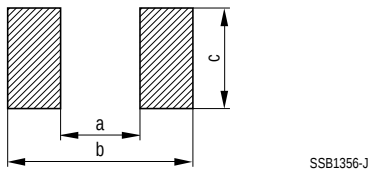

Dimensions (mm)

<i>a</i>	<i>b</i>	<i>c</i>
$0,9 \pm 0,1$	$2,3 \pm 0,3$	$0,8 \pm 0,1$

Characteristics and ordering codes

L_R nH	Tolerance	Q_{min}	Q_{typ} (at 800 MHz)	f_L, f_Q MHz	I_R mA	R_{max} Ω	$f_{res, min}$ MHz	Ordering code ¹⁾²⁾
1,0	$\pm 0,3$ nH	7	47	100	500	0,05	6000	B82496-C3109-+
1,2	$\triangleq A$	7	47	100	500	0,06	6000	B82496-C3129-+
1,5	$\pm 0,2$ nH	8	47	100	500	0,07	6000	B82496-C3159-+
1,8	$\triangleq Z$	8	45	100	500	0,08	6000	B82496-C3189-+
2,2		8	35	100	500	0,09	6000	B82496-C3229-+
2,7		8	35	100	500	0,10	6000	B82496-C3279-+
3,3		9	35	100	500	0,12	5500	B82496-C3339-+
3,9	± 5 %	9	36	100	450	0,15	5500	B82496-C3399-+
4,7	$\triangleq J$	9	36	100	450	0,17	4800	B82496-C3479-+
5,6	$\pm 0,2$ nH	9	36	100	430	0,18	4600	B82496-C3569-+
6,8	$\triangleq Z$	9	36	100	430	0,20	3550	B82496-C3689-+
8,2		9	36	100	400	0,28	3500	B82496-C3829-+
10	± 5 %	10	37	100	400	0,32	2800	B82496-C3100-+
12	$\triangleq J$	10	37	100	400	0,35	2800	B82496-C3120-+
15	± 2 %	10	38	100	350	0,41	2500	B82496-C3150-+
18	$\triangleq G$	10	39	100	350	0,45	2300	B82496-C3180-+
22		10	40	100	300	0,50	2000	B82496-C3220-+
27		10	41	100	300	0,55	2000	B82496-C3270-+
33		10	40	100	300	0,60	1800	B82496-C3330-+
39		11	39	100	300	0,80	1800	B82496-C3390-+
47		11	38	100	250	0,95	1800	B82496-C3470-+
56		12	35	100	250	1,2	1800	B82496-C3560-+
68		12	35	100	250	1,3	1500	B82496-C3680-+
82		12	33	100	250	1,5	1500	B82496-C3820-+
100		12	30	100	200	1,8	1300	B82496-C3101-+
120 ³⁾		5	25	25,2	130	3,0	1200	B82496-C3121-+
150 ³⁾		5	22	25,2	100	4,5	1100	B82496-C3151-+
180 ³⁾		4	20	25,2	80	6,5	1000	B82496-C3181-+
220 ³⁾		4	—	25,2	70	7,5	900	B82496-C3221-+

1) Replace the + by the code letter for the required inductance tolerance (see table).

2) Ordering code for cardboard tape/reel packing. For bulk case append code number »1«. Example: B82496-C3109-A1

3) In preparation