


SPECIAL FEATURES:

- * SINGLE & DUAL OUTPUT MODELS
- * 5 / 12 / 24V INPUT VERSIONS
- * UNREGULATED OUTPUTS
- * HIGH EFFICIENCY - UP TO 81%
- * WIDE TEMPERATURE RANGE: -40 / +85°C
- * ISOLATION UP TO 1,000VDC
- * 2 YEAR WARRANTY

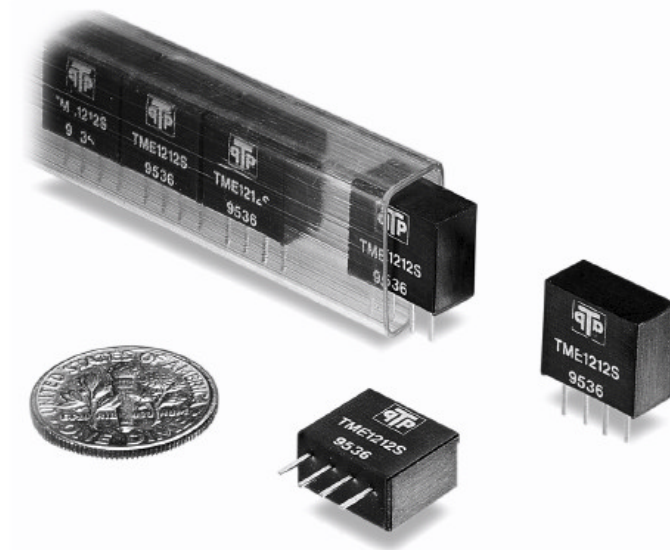

Operating Temperature Range: -40 / +85°C Maximum

Storage Temperature: -40 / +105°C

Efficiency: Up to 80%

Isolation: 1000vdc

Meantime Between Failures: Greater than 2,000,000 hours at 25C

EMI / RFI: Internal Capacitors

Line Regulation: $\pm 1.2\%$ Maximum

Load Regulation: <10% Maximum

Ripple: <150mv pk-pk maximim

Adjustment Range: Fixed

OverVoltage Protection: N/A

MODEL NUMBER:	INPUT RANGE:	OUTPUT VOLTAGE:	OUTPUT CURRENT:	EFFICIENCY:
TME0505S	4.5 - 5.5	5	0.200	70%
TME0509S	4.5 - 5.5	9	0.110	76%
TME0512S	4.5 - 5.5	12	0.080	77%
TME0515S	4.5 - 5.5	15	0.065	78%
TME1205S	10.8 - 13.2	5	0.200	71%
TME1209S	10.8 - 13.2	9	0.110	77%
TME1212S	10.8 - 13.2	12	0.080	79%
TME1215S	10.8 - 13.2	15	0.065	80%
TME2405S	21.6 - 26.4	5	0.200	70%
TME2409S	21.6 - 26.4	9	0.110	76%
TME2412S	21.6 - 26.4	12	0.080	79%
TME2415S	21.6 - 26.4	15	0.065	79%

