



AC-Capacitors, Suppression Capacitors Class X2 AC 300V (MKT)

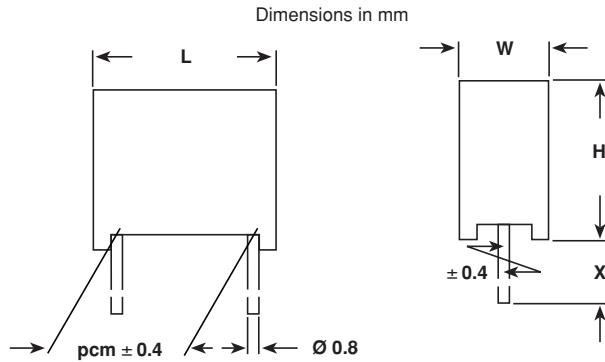

LEAD LENGTH X (mm)	ORDERING CODE**
4 ⁻¹	F1772-... - 3204 / 3264
6 ⁻¹	F1772-... - 3200 / 3260
15 ⁻¹	F1772-... - 3215 / 3265
30 ⁺⁵	F1772-... - 3230 / 3263

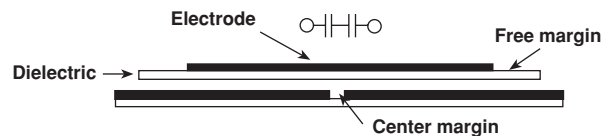

MAXIMUM PULSE RISE TIME: (d_U/d_t) in V/ μ s

RATED VOLTAGE	PITCH (mm)			
	15.0	22.5	27.5	37.5
AC 300V	200	150	100	100

RATED VOLTAGE:

AC 300V, 50/60Hz

PERMISSIBLE DC VOLTAGE:

DC 800V

TERMINALS:

Radial tinned copper wire



COATING:

Plastic case, epoxy resin sealed, flame retardant
UL 94V-0

CLIMATIC TESTING CLASS ACC. TO EN 60068-1:

40/100/56

CAPACITANCE RANGE:

E12 series 0.01 μ FX2 - 2.2 μ FX2

E12 values on request

FEATURES:

Product is completely lead (Pb)-free

Product is RoHS compliant

CAPACITANCE TOLERANCE:

Standard: $\pm 20\%$

DISSIPATION FACTOR $\tan\delta$:

< 1% measured at 1kHz

INSULATION RESISTANCE: FOR $C \leq 0.33\mu$ F:

30 G Ω average value

15 G Ω minimum value

TIME CONSTANT FOR $C > 0.33\mu$ F:

10 000 sec. average value

5 000 sec. minimum value

TEST VOLTAGE:

(Electrode/electrode): DC 2150V/2 sec.

REFERENCE STANDARDS:

EN 132 400, 1994

EN 60068-1

IEC 60384-14/2, 1993

UL 1283

UL 1414

CSA 22.2 No. 8-M 86

CSA 22.2 No. 1-M 90

DIELECTRIC:

Polyester film

ELECTRODES:


Metal evaporated

CONSTRUCTION:

Metallized film capacitor

Internal series connection

Between interconnected terminations and case (foil method):
AC 2500V for 2 sec. at 25°C.

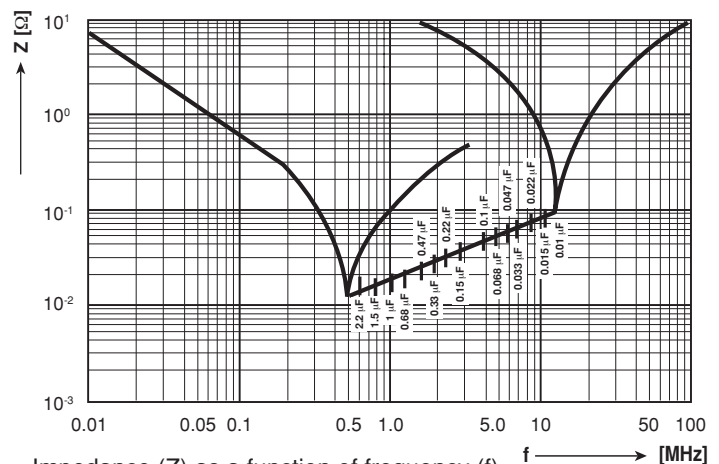

Impedance (Z) as a function of frequency (f)
at $T_a = 20^\circ\text{C}$ (average).

Measurement with lead length 6mm.

FURTHER TECHNICAL DATA:

See page 21 (Document No 26504)



APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A. (for AC 250V)	UL 1283 UL 1414	0.01 - 2.2 μ FX 0.01 - 1.0 μ FX	E 76297 E 100682	
Canada (for AC 250V)	C 22.2 No. 8-M 1986 C 22.2 No. 1-M 1994	0.01 - 2.2 μ FX 0.01 - 0.82 μ FX	LR 64546 LR 64546-8	
CB TEST-CERTIFICATE (for AC 300V)		0.01 - 2.2 μ FX2	DE 1-8791	
Germany	EN 132 400, 1999 IEC 60384-14, 2nd edition, 1995	0.01 - 2.2 μ FX2	40005120	
This approval mark together with the CB-Certificate replace all national approval marks of the following countries (they have already signed the CB-Agreement):				
Austria	Belgium	Denmark	Finland	Sweden
France	Germany	Ireland	Italy	Switzerland
Netherlands	Israel	Portugal	Spain	Great Britain
Japan	Norway	China	Poland	Czech. Republic
Singapore	Rep. of Korea	Hungary	Iceland	Slovenia

CAPACITANCE	TOL.	PITCH	BOX NO.	DIMENSIONS W x H x L (mm)	WEIGHT LEAD LENGTH 6-1mm (g)	QUANTITY PACKAGE LEAD LENGTH < = 6-1mm (pcs)*	ORDERING CODE**
	(%)	(mm)		(+ 0.2/- 0.4mm)			
0.01 μ FX2	± 20	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-310-32 ..
0.015 μ FX2	± 20	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-315-32 ..
0.022 μ FX2	± 20	15.0	05	5.3 x 10.3 x 17.8	1.4	750	F1772-322-32 ..
0.033 μ FX2	± 20	15.0	49	6.0 x 12.0 x 17.9	2.0	600	F1772-333-32 ..
0.047 μ FX2	± 20	15.0	49	6.0 x 12.0 x 17.9	2.1	600	F1772-347-32 ..
0.068 μ FX2	± 20	15.0	07	7.3 x 13.3 x 17.8	2.7	450	F1772-368-32 ..
0.1 μ FX2	± 20	15.0	08	8.3 x 14.3 x 17.8	4.1	325	F1772-410-32 ..
0.15 μ FX2	± 20	22.5	11	7.3 x 15.3 x 26.3	4.3	235	F1772-415-32 ..
0.15 μ FX2	± 20	15.0	35	10.3 x 17.3 x 17.8	4.3	225	F1772-415-326 .
0.22 μ FX2	± 20	22.5	12	8.3 x 16.3 x 26.3	6.8	200	F1772-422-32 ..
0.22 μ FX2	± 20	15.0	36	13.3 x 22.3 x 17.8	7.1	185	F1772-422-326 .
0.33 μ FX2	± 20	27.5	29	8.8 x 18.3 x 31.3	8.0	160	F1772-433-32 ..
0.33 μ FX2	± 20	22.5	13	10.3 x 18.3 x 26.3	6.7	170	F1772-433-326 .
0.47 μ FX2	± 20	27.5	14	11.0 x 20.3 x 31.3	10.0	125	F1772-447-32 ..
0.47 μ FX2	± 20	22.5	27	12.3 x 19.8 x 26.3	8.7	125	F1772-447-326 .
0.68 μ FX2	± 20	27.5	15	13.0 x 23.3 x 31.3	14.2	110	F1772-468-32 ..
0.68 μ FX2	± 20	22.5	38	15.3 x 26.3 x 26.3	14.3	110	F1772-468-326 .
1.0 μ FX2	± 20	27.5	17	16.3 x 29.3 x 31.3	22.5	85	F1772-510-32 ..
1.0 μ FX2	± 20	22.5	20	17.8 x 29.3 x 26.3	18.3	90	F1772-510-326 .
1.5 μ FX2	± 20	37.5	70	15.5 x 28.3 x 41.3	26.1	70	F1772-515-32 ..
1.5 μ FX2	± 20	27.5	40	17.8 x 32.8 x 31.3	24.4	80	F1772-515-326 .
2.2 μ FX2	± 20	37.5	20	17.8 x 32.3 x 41.3	33.4	60	F1772-522-32 ..

Inbuilt discharging resistor on request (with larger case dimensions).

* Further information about packaging quantities with different lead length and/or taped versions.

See page 16 (Document No 27608 Packing Quantities). Use Box No. as reference

** These capacitors can be delivered on continuous tape and reel - see page 14/15 (Document Number 27622).

The ordering code is: F1772- ... - 3290 at H = 16.5mm

F1772- ... - 3291 at H = 18.5mm

F1772- ... - 3960 at H = 16.5mm

F1772- ... - 3961 at H = 18.5mm



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.