





TECHNICAL SPECIFICATIONS:

I- MATERIAL :

HOUSING: POLYESTER GLASS FILLED UL 94VO COLOR BLACK
 TERMINAL : PHOSPHOR BRONZE PLATED WITH :
 0.00127/.000050 MIN. GOLD IN CONTACT AREA,
 0.00190/.000075 MIN. PURE TIN IN TAIL AREA,
 BOTH OVER 0.00127/.000050 MIN. NICKEL OVERALL
 SHIELD : BRASS PLATED WITH 0.0020/.000078 MIN. TIN

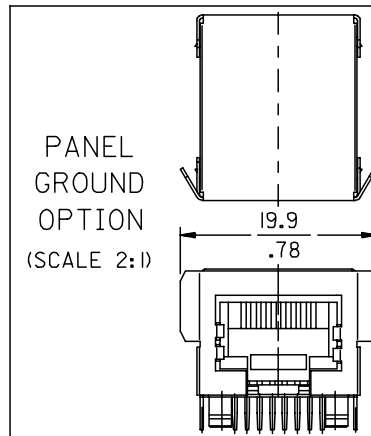

ENG. N°	FOOTPRINT VERSION	HOUSING SIZE	LOADED CKTS	PANEL GROUND	TOOLED	PACKAGING SPEC. NOTE 4
85505-0001	A	8	8	NO	YES	SHEET 1
85505-0002				YES	YES	SHEET 2

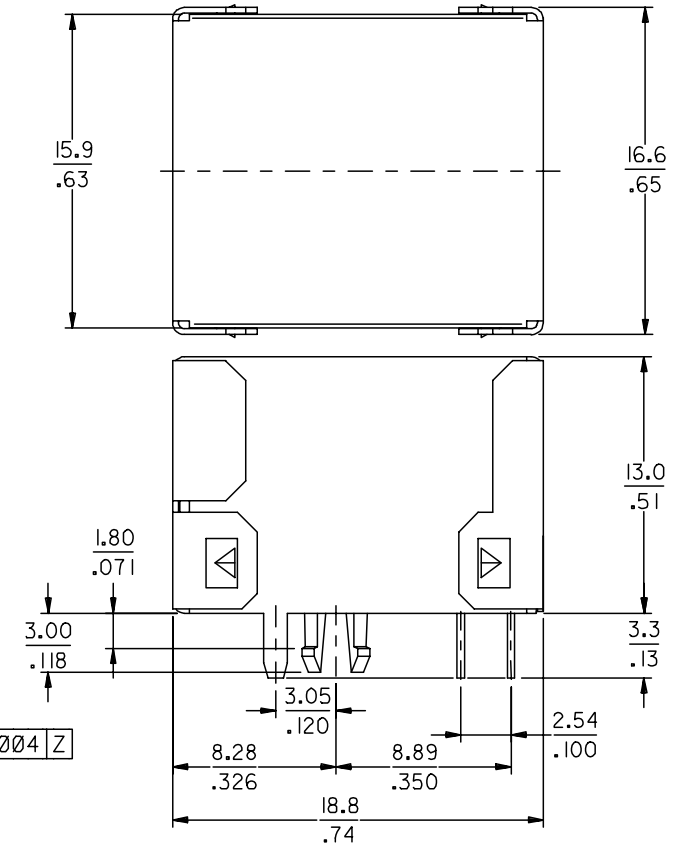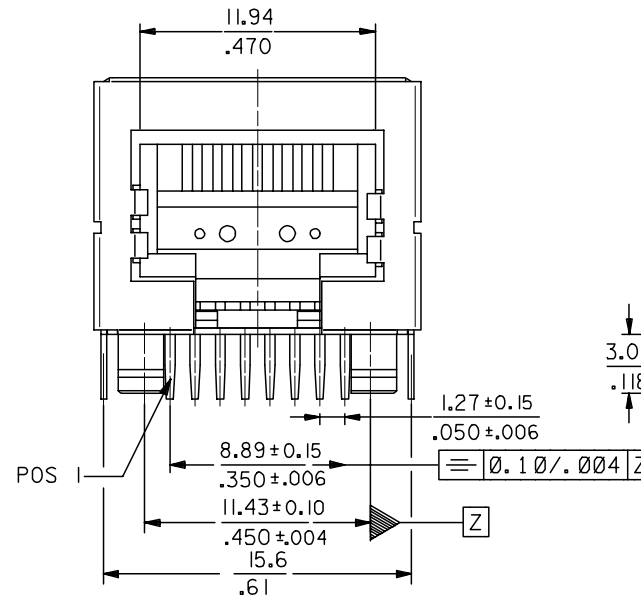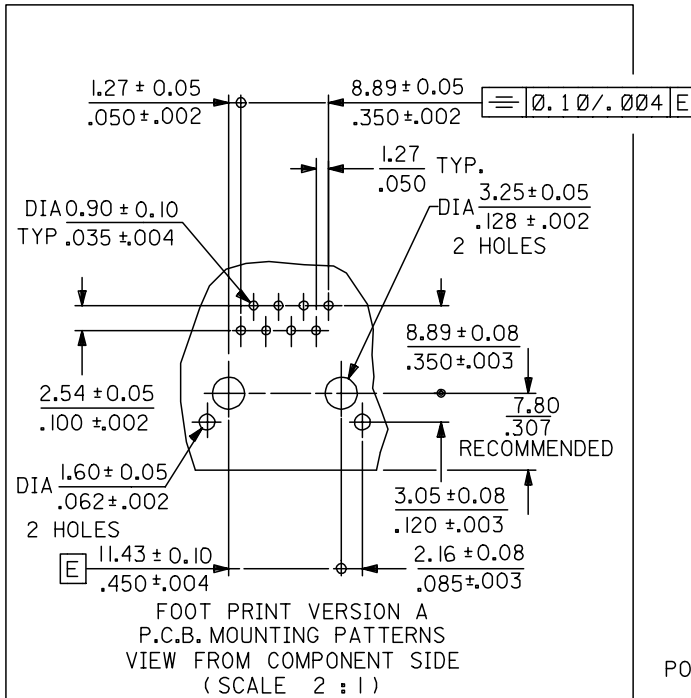

NOTES:

- JACK FOR MATING WITH SHIELDED PLUG MOLEX 95043 AND 85568 SERIES.
- PRODUCT SPECIFICATION: MOLEX PS-85505.
- APPLICATION SPECIFICATION: MOLEX AS-95001.
- PACKAGING SPECIFICATION: MOLEX PK-95122 SEE CHART.
- P.C. BOARD THICKNESS : 1.57/.062
- EXCEEDS CATEGORY 5E PERFORMANCE.

ENTER DESCRIPTION EC NO: MG2005-0136 DRAWN: SEBASTI 2004/10/13 CHKD: FCARABET 2004/10/14 APPR: KNOLLER 2004/10/15		DESCRIPTION	QUALITY SYMBOLS ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY HB	DATE 99/07/06	TITLE HIGH SPEED MODULAR JACK R/A FULLY SHIELDED THROUGH HOLE - VERSION A			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		4 PLACES	± ---	± ---	CHECKED BY ER	DATE 99/09/20					
		3 PLACES	± ---	± .010	APPROVED BY FR/MF	DATE 99/10/15					
		2 PLACES	± 0.25	± .014							
		1 PLACE	± 0.35	± ---	MOLEX INCORPORATED						
SIZE A3		ANGULAR ± 2 °				MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		SEE CHART				SD-85505-003		1 OF 2			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											