


A. C. Line Rated Disc Capacitors

X & Y EMI/RFI Filter Types Across-The-Line Line-By-Pass Antenna Coupling

Cera-Mite AC Line Rated Discs are rugged, high voltage capacitors specifically designed and tested for use on 125 Volt through 600 Volt AC power sources. Certified to meet demanding X & Y type worldwide safety agency requirements, they are applied in across-the-line, line-to-ground, and line-by-pass filtering applications. Cera-Mite offers the most complete selection in the industry—six product families—exactly tailored to your needs.

- Worldwide Safety Agency Recognition
 - Underwriters Laboratories - UL1414 & UL1283
 - Canadian Standards Association - CSA 22.2 No. 1 & No. 8
 - European EN132400 to IEC 384-14 Second Edition
- Required In AC Power Supply and Filter Applications
- Six Families Tailored To Specific Industry Requirements
- Complete Range of Capacitance Values



CERA-MITE AC LINE RATED CERAMIC CAPACITOR SPECIFICATIONS

Performance Data / Series:	440L	30LV	30LVS	25Y	125L	20VL
Application Voltage Range (Vrms 50/60 Hz) (Note 1)	250/500	300/400	250/400	250/400	250	250
Dielectric Strength (Vrms 50/60 Hz for 1 minute)	4000	2500	2500	2500	2000	1250
Dissipation Factor (Maximum)	2%					
Insulation Resistance (Minimum)	1000 ΩF					
Mechanical Data	Service Temperature 125°C Maximum; Coating Material per UL94V0					
Temperature Characteristics	Y5U	Y5U	Y5U	Y5S	Y5V	Y5V
See Part Number Detail for Temperature Characteristics						

SAFETY AGENCY RECOGNITION AND EMI / RFI FILTERING SUBCLASS

Series / Recognition / Voltage	440L	30LV	30LVS	25Y	125L	20VL
Underwriters Laboratories Inc.: (Note 2)						
UL 1414 Across-The-Line	Across-The-Line	Across-The-Line	—	—	—	—
UL 1414 Antenna Coupling	Antenna-Coupling	Antenna-Coupling	—	—	—	—
UL 1414 Line-By-Pass	Line-By-Pass	Line-By-Pass	Line-By-Pass	Line-By-Pass	Line-By-Pass	—
UL 1414 Rated Voltage	250 VAC	250 VAC	250 VAC	250 VAC	250 VAC	—
UL1283 Electromagnetic Interference Filters	EMI Filters	EMI Filters	EMI Filters	EMI Filters	—	EMI Filters
UL1283 Rated Voltage	600 VAC	250 VAC	250 VAC	250 VAC	—	250 VAC
Canadian Standards Association:						
CSA 22.2 No.1 Across-The-Line	Across-The-Line	Across-The-Line	—	—	—	—
CSA 22.2 No.1 Isolation	Isolation	Isolation	Isolation	Isolation	Isolation	—
CSA 22.2 No. 1 Rated Voltage	250 VAC	250 VAC	250 VAC	250 VAC	125/250 VAC	—
CSA 22.2 No. 8 Line-to-Ground Capacitors	—	Line-To-Ground	Line-To-Ground	Line-To-Ground	—	Line-To-Ground
For Use in Certified EMI Filters	—	Certified EMI Filters	Certified EMI Filters	Certified EMI Filters	—	Certified EMI Filters
CSA 22.2 No. 8 Rated Voltage	—	400 VAC	400 VAC	400 VAC	—	250 VAC
European CENELEC Electronic Components Committee (CECC) EN 132 400 to Publication IEC 384-14 Table II, Edition 2:						
IEC 384-14 Second Edition Subclass Y: (Note 3)	Y1	Y2	Y2	Y2	Y4	—
Subclass Y Voltage (Vrms 50-60 Hz)	500 VAC	300 VAC	250 VAC	250 VAC	125 VAC	—
Type of Insulation Bridged	Double or Reinforced	Basic or Supplementary	Basic or Supplementary	Basic or Supplementary	Basic or Supplementary	—
Peak Impulse Voltage Before Endurance Test	8 kV	5 kV	5 kV	5 kV	2.5 kV	—
IEC 384-14 Second Edition Subclass X: (Note 4)	X1	X1	X1	X1	X1	X2
Subclass X Voltage (Vrms 50-60 Hz)	400 VAC	400 VAC	400 VAC	400 VAC	400 VAC	400 VAC
Peak Impulse Voltage in Service Application	2.5 to 4.0 kV High Pulse	2.5 to 4.0 kV High Pulse	2.5 to 4.0 kV High Pulse	2.5 to 4.0 kV High Pulse	2.5 to 4.0 kV High Pulse	To 2.5 kV General Purpose
Damp Heat, Steady State Recognition	Code HKF -25°C / +125°C / 21 days					

Note 1

Voltage Ratings: All ratings are manufacturer's rating.
 • Part markings are governed by agency rules and customer requirements.
 • Parts are marked 250 VAC unless otherwise requested.

Note 2

UL1414 Across-The-Line, Antenna Coupling, and Line-By-Pass Capacitors:

- Across-The-Line—A capacitor connected either across a supply circuit or between one side of a supply circuit and a conductive part that may be connected to earth ground.
- Antenna-Coupling—A capacitor connected from an antenna terminal to circuits within an appliance.
- Line-By-Pass—A capacitor connected between one side of a supply circuit and an accessible conductive part.

Note 3

IEC 384-14 Subclass Y Capacitors:

- A capacitor of a type suitable for use in situations where failure of the capacitor could lead to danger of electric shock.
- Class Y capacitors are divided into sub-classes based on type of insulation bridged and voltage ranges.
- For definitions of basic, supplementary, double and reinforced insulation, see IEC Publication 536.
- Subclass Y capacitors may be used in applications which require a Subclass X rating.

Note 4

IEC 384-14 Subclass X Capacitors:

- A capacitor of a type suitable for use in situations where failure of the capacitor would not lead to danger of electric shock.

- Class X capacitors are divided into sub-classes according to the peak impulse test voltage superimposed on the main voltage.

Note 5

AC Leakage Current:

- For all Series (except 125L) - AC Leakage Current (mA) specified at 250 Vrms, 60 Hz.
- For 125L Series - AC Leakage Current (mA) specified at 125 Vrms, 60 Hz.

Note 6

Alternate Lead Spacings of 7.5mm and 10mm are available bulk or tape & reel.

- European Required Minimum Lead Clearance (Prevents Use of Inside Crimp): .315" (8mm) on 440L Series; .118" (3mm) on all other series.



Fig 5 Typical Filter Showing X & Y Types


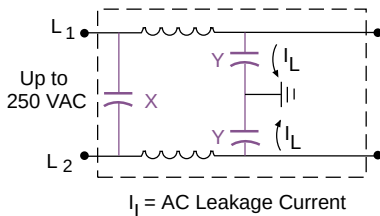


Fig 6

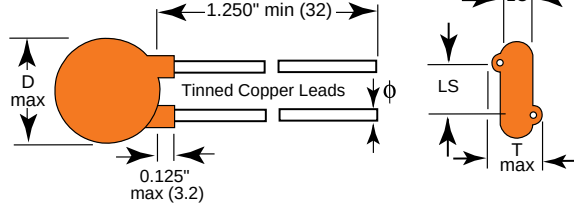

WIRE LEAD OFFSET

Series	"LO" typ. in	mm
440L	.158"	(4.0)
30LV	.132"	(3.4)
30LVS	.125"	(3.2)
25Y	.060"	(1.5)
125L	.110"	(2.8)
20VL	.077"	(2.0)

440L SERIES AC RATED CERAMIC DISC CAPACITORS

Rugged, High Dielectric Strength, Full UL Recognition, X1 & Y1 Applications

UL 1414Across-The-Line
Antenna Coupling
Line-By-Pass**UL 1283**

EMI Filters

CSA 22.2No. 1 - Across-The-Line
No. 1 - Isolation**IEC 384-14**2nd Edition
Y1 - 500 VAC
X1 - 400 VAC**30LV SERIES AC RATED CERAMIC DISC CAPACITORS**

Full UL 1414 Recognition, X1 & Y2 Applications

UL 1414Across-The-Line
Antenna Coupling
Line-By-Pass**UL 1283**

EMI Filters

CSA 22.2No. 1 - Across-The-Line
No. 1 - Isolation
No. 8 - EMI Filters**IEC 384-14**2nd Edition
Y2 - 300 VAC
X1 - 400 VAC

Value pF	Tol.	Cera-Mite Number	AC Leakage I _L mA	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
10	K	440LQ10	1.3 uA	COG	.330 (8.4)	.195 (5.0)	.375 (9.5)	20 .032 (.81)
15	K	440LQ15	2.0 uA	U2J	.330 (8.4)	.210 (5.3)	.375 (9.5)	20 .032 (.81)
22	K	440LQ22	3.0 uA	P3K	.330 (8.4)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
33	K	440LQ33	4.4 uA	R3L	.330 (8.4)	.200 (5.1)	.375 (9.5)	20 .032 (.81)
47	K	440LQ47	6.3 uA	R3L	.330 (8.4)	.180 (4.6)	.375 (9.5)	20 .032 (.81)
68	K	440LQ68	0.01	X7R	.330 (8.4)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
100	K	440LT10	0.02	X7R	.330 (8.4)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
150	K	440LT15	0.03	X7R	.330 (8.4)	.235 (6.0)	.375 (9.5)	20 .032 (.81)
220	K	440LT22	0.04	X7R	.330 (8.4)	.235 (6.0)	.375 (9.5)	20 .032 (.81)
330	K	440LT33	0.05	X7R	.330 (8.4)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
470	M	440LT47	0.07	Y5U	.330 (8.4)	.230 (5.8)	.375 (9.5)	20 .032 (.81)
560	M	440LT56	0.08	Y5U	.330 (8.4)	.230 (5.8)	.375 (9.5)	20 .032 (.81)
680	M	440LT68	0.10	Y5U	.330 (8.4)	.235 (6.0)	.375 (9.5)	20 .032 (.81)
1000	M	440LD10	0.15	Y5U	.365 (9.3)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
1500	M	440LD15	0.23	Y5U	.365 (9.3)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
2000	M	440LD20	0.30	Y5U	.400 (10.2)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
2200	M	440LD22	0.34	Y5U	.430 (10.9)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
2700	M	440LD27	0.41	Y5U	.460 (11.7)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
2800	M	440LD28	0.43	Y5U	.460 (11.7)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
3000	M	440LD30	0.46	Y5U	.490 (12.4)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
3200	M	440LD32	0.49	Y5U	.490 (12.4)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
3300	M	440LD33	0.50	Y5U	.490 (12.4)	.215 (5.5)	.375 (9.5)	20 .032 (.81)
3900	M	440LD39	0.59	Y5U	.530 (13.5)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
4000	M	440LD40	0.61	Y5U	.530 (13.5)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
4700	M	440LD47	0.71	Y5U	.620 (15.7)	.230 (5.8)	.375 (9.5)	20 .032 (.81)
5000	M	440LD50	0.76	Y5U	.620 (15.7)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
5500	M	440LD55	0.84	Y5U	.680 (17.3)	.230 (5.8)	.375 (9.5)	20 .032 (.81)
5600	M	440LD56	0.85	Y5U	.680 (17.3)	.230 (5.8)	.375 (9.5)	20 .032 (.81)
6800	M	440LD68	1.04	Y5U	.720 (18.3)	.235 (6.0)	.375 (9.5)	20 .032 (.81)
8000	M	440LD80	1.22	Y5U	.720 (18.3)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
9000	M	440LD90	1.37	Y5U	.790 (20.1)	.225 (5.7)	.375 (9.5)	20 .032 (.81)
.01μF	M	440LS10	1.52	Y5U	.850 (21.6)	.230 (5.8)	.375 (9.5)	20 .032 (.81)

Note 5

Note 6

Value pF	Tol.	Cera-Mite Number	AC Leakage I _L mA	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
10	K	30LVQ10	1.3 uA	COG	.330 (8.4)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
15	K	30LVQ15	2.0 uA	U2J	.330 (8.4)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
22	K	30LVQ22	3.0 uA	P3K	.330 (8.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
33	K	30LVQ33	4.4 uA	R3L	.330 (8.4)	.190 (4.8)	.250 (6.4)	22 .025 (.64)
47	K	30LVQ47	6.3 uA	R3L	.330 (8.4)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
68	K	30LVQ68	0.01	S3L	.330 (8.4)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
100	K	30LVT10	0.02	X7R	.330 (8.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
150	K	30LVT15	0.03	X7R	.330 (8.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
220	K	30LVT22	0.04	X7R	.330 (8.4)	.195 (5.0)	.250 (6.4)	22 .025 (.64)
330	K	30LVT33	0.05	X7R	.330 (8.4)	.195 (5.0)	.250 (6.4)	22 .025 (.64)
470	K	30LVT47	0.08	X7R	.330 (8.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
560	K	30LVT56	0.09	X7R	.330 (8.4)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
680	K	30LVT68	0.11	X7R	.330 (8.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
680	M	30LVT68	0.10	Y5U	.330 (8.4)	.220 (5.6)	.250 (6.4)	22 .025 (.64)
1000	K	30LVD10	0.16	X7R	.365 (9.3)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
1000	M	30LVD10	0.15	Y5U	.330 (8.4)	.215 (5.5)	.250 (6.4)	22 .025 (.64)
1500	K	30LVD15	0.24	X7R	.460 (11.7)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
1500	M	30LVD15	0.23	Y5U	.330 (8.4)	.195 (5.0)	.250 (6.4)	22 .025 (.64)
2000	M	30LVD20	0.31	Y5U	.400 (10.2)	.210 (5.3)	.250 (6.4)	22 .025 (.64)
2200	M	30LVD22	0.34	Y5U	.400 (10.2)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
2700	M	30LVD27	0.41	Y5U	.430 (10.9)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
2800	M	30LVD28	0.43	Y5U	.430 (10.9)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
3000	M	30LVD30	0.46	Y5U	.460 (11.7)	.205 (5.2)	.250 (6.4)	22 .025 (.64)
3200	M	30LVD32	0.49	Y5U	.460 (11.7)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
3300	M	30LVD33	0.50	Y5U	.460 (11.7)	.195 (5.0)	.250 (6.4)	22 .025 (.64)
3900	M	30LVD39	0.59	Y5U	.490 (12.4)	.200 (5.1)	.250 (6.4)	22 .025 (.64)
4000	M	30LVD40	0.61	Y5U	.530 (13.5)	.210 (5.3)	.250 (6.4)	22 .025 (.64)
4700	M	30LVD47	0.72	Y5U	.620 (15.7)	.220 (5.6)	.375 (9.5)	20 .032 (.81)
5000	M	30LVD50	0.76	Y5U	.620 (15.7)	.215 (5.5)	.375 (9.5)	20 .032 (.81)
5500	M	30LVD55	0.84	Y5U	.560 (14.2)	.195 (5.0)	.375 (9.5)	20 .032 (.81)
5600	M	30LVD56	0.85	Y5U	.560 (14.2)	.195 (5.0)	.375 (9.5)	20 .032 (.81)
6800	M	30LVD68	1.04	Y5U	.680 (17.3)	.205 (5.2)	.375 (9.5)	20 .032 (.81)
8000	M	30LVD80	1.22	Y5U	.680 (17.3)	.195 (5.0)	.375 (9.5)	20 .032 (.81)
9000	M	30LVD90	1.37	Y5U	.720 (18.3)	.200 (5.1)	.375 (9.5)	20 .032 (.81)
.01μF	M	30LVS10	1.52	Y5U	.720 (18.3)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
.015μF	M	30LVS15*	2.28	Y5U	.900 (22.9)	.200 (5.1)	.375 (9.5)	20 .032 (.81)


Note 5

Note 6

* 30LVS15 not available with UL 1414 recognition.

Fig 7 Optional 3-Leaded Style

An optional 3-leaded construction is available. It consists of a single capacitor with the two outside leads attached to one electrode, and the center lead attached to the other electrode. Used in feed-thru or line-to-ground applications, it allows a short ground lead for enhanced high frequency performance.

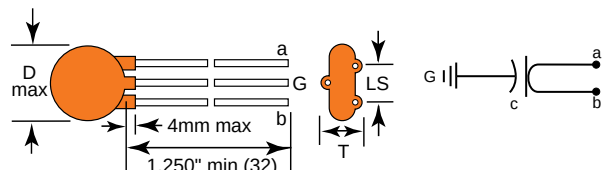

Agency Files/ Licenses	440L	30LV	30LVS	25Y	125L	20VL
Underwriters Laboratories Inc.						
UL 1414 Antenna-Coupling Components	E99264	E99264	—	—	—	—
UL 1414 Line-By-Pass Components	—	—	E99264	E99264	E99264	—
UL 1283 Electromagnetic Interference Filters	E128046	E99264	E128046	E99264	—	E128046
Canadian Standards Association:						
CSA 22.2 No.1 Across-The-Line, Isolation	LR62016	LR62016	—	—	—	—
CSA 22.2 No.1 Isolation	—	—	LR62016	LR62016	LR62016	—
CSA 22.2 No. 8 EMI Filters	—	LR62016	LR62016	LR62016	—	LR62016
European CENELEC Electronic Components Committee (CECC)						
Country Certifications:	Specification EN 132 400 to Publication IEC 384-14 Table 11, Edition 2 (1993)					
VDE	14239 - 4670	14239 - 4670	14239 - 4670	14239 - 4670	14239 - 4670	14239 - 4670
SEV	95,771173	95,771173	95,771173	95,771173	95,771173	95,771173
SEMKO	954311001	961416201	961416301	954311601	954310601	9543108801
NEMKO	P95104257	P96101228	P96101227	P95104253	P95104252	P95104254
DEMKO	304885	304886	304887	304888	304882	304884
FIMKO	187550 - 01	190061 - 01	190059 - 01	187547 - 01	187548 - 01	187549 - 01

Compact Size for EMI Filtering, X1 & Y2 Applications

UL 1283 EMI Filters

CSA 22.2
No. 1 - Isolation
No. 8 - EMI Filters

IEC 384-14
2nd Edition
Y2 - 250 VAC
X1 - 400 VAC

Value pF	Tol.	Cera-Mite Number	AC Leakage I _L mA	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
1000	M	30LVSD10	0.15	Y5U	.330 (8.4)	.195 (5.0)	.250 (6.4)	22 .025 (.64)
1500	M	30LVSD15	0.23	Y5U	.330 (8.4)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
2000	M	30LVSD20	0.31	Y5U	.330 (8.4)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
2200	M	30LVSD22	0.34	Y5U	.330 (8.4)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
2700	M	30LVSD27	0.41	Y5U	.365 (9.3)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
2800	M	30LVSD28	0.43	Y5U	.365 (9.3)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
3000	M	30LVSD30	0.46	Y5U	.400 (10.2)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
3200	M	30LVSD32	0.49	Y5U	.400 (10.2)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
3300	M	30LVSD33	0.50	Y5U	.400 (10.2)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
3900	M	30LVSD39	0.59	Y5U	.460 (11.7)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
4000	M	30LVSD40	0.61	Y5U	.490 (12.4)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
4700	M	30LVSD47	0.72	Y5U	.490 (12.4)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
4700	M	30LVSD47	0.72	Y5V	.430 (10.9)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
5000	M	30LVSD50	0.76	Y5U	.530 (13.5)	.180 (4.6)	.250 (6.4)	22 .025 (.64)
5500	M	30LVSD55	0.84	Y5U	.530 (13.5)	.185 (4.7)	.250 (6.4)	22 .025 (.64)
6800	M	30LVSD68	1.04	Y5U	.620 (15.7)	.200 (5.1)	.375 (9.5)	20 .032 (.81)
.010μF	M	30LVSS10	1.52	Y5U	.720 (18.3)	.200 (5.1)	.375 (9.5)	20 .032 (.81)
.010μF	M	30LVSVS10	1.52	Y5V	.560 (14.2)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
			Note 5				Note 6	

Temperature Stable Y5S (-30°C to +85°C ±22%), X1 & Y2 Applications

UL 1414
Line-Bv-Pass

UL 1283
EMI Filters

CSA 22.2
No. 1 - Isolation
No. 8 - EMI Filters

IEC 384-14
2nd Edition
Y2 - 250 VAC
X1 - 400 VAC

Value pF	Tol.	Cera-Mite Number	AC Leakage I _L mA	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
1000	M	25YD10	0.17	Y5S	.330 (8.4)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
1500	M	25YD15	0.25	Y5S	.400 (10.2)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
2000	M	25YD20	0.33	Y5S	.430 (10.9)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
2200	M	25YD22	0.36	Y5S	.460 (11.7)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
2700	M	25YD27	0.45	Y5S	.490 (12.4)	.170 (4.3)	.250 (6.4)	22 .025 (.64)
2800	M	25YD28	0.46	Y5S	.530 (13.5)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
3000	M	25YD30	0.50	Y5S	.530 (13.5)	.175 (4.4)	.250 (6.4)	22 .025 (.64)
3200	M	25YD32	0.53	Y5S	.560 (14.2)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
3300	M	25YD33	0.55	Y5S	.560 (14.2)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
3900	M	25YD39	0.64	Y5S	.620 (15.7)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
4000	M	25YD40	0.66	Y5S	.620 (15.7)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
4700	M	25YD47	0.78	Y5S	.680 (17.3)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
5000	M	25YD50	0.83	Y5S	.680 (17.3)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
5500	M	25YD55	0.91	Y5S	.720 (18.3)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
5600	M	25YD56	0.92	Y5S	.720 (18.3)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
6800	M	25YD68	1.12	Y5S	.790 (20.1)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
8000	M	25YD80	1.32	Y5S	.900 (22.9)	.200 (5.1)	.375 (9.5)	20 .032 (.81)
			Note 5				Note 6	

Economical, Line-by-Pass, X1 & Y4 Applications

CSA 22.2
No. 1 - Iso

IEC 384-14 2nd Edition
Y4 - 125 VAC
X1 - 400 VAC

Value pF	Tol.	Cera-Mite Number	AC Leakage I _L mA	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
1000	M	125LD10	0.07	Y5V	.330 (8.4)	.195 (5.0)	.250 (6.4)	20 .032 (.81)
1500	M	125LD15	0.11	Y5V	.330 (8.4)	.195 (5.0)	.250 (6.4)	20 .032 (.81)
2000	M	125LD20	0.15	Y5V	.330 (8.4)	.185 (4.7)	.250 (6.4)	20 .032 (.81)
2200	M	125LD22	0.17	Y5V	.330 (8.4)	.180 (4.6)	.250 (6.4)	20 .032 (.81)
3300	M	125LD33	0.25	Y5V	.365 (9.3)	.195 (5.0)	.250 (6.4)	20 .032 (.81)
4700	M	125LD47	0.36	Y5V	.400 (10.2)	.185 (4.7)	.250 (6.4)	20 .032 (.81)
5000	M	125LD50	0.38	Y5V	.430 (10.9)	.195 (5.0)	.375 (9.5)	20 .032 (.81)
6800	M	125LD68	0.52	Y5V	.490 (12.4)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
8200	M	125LD82	0.63	Y5V	.530 (13.5)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
.010μF	M	125LS10	0.76	Y5V	.560 (14.2)	.190 (4.8)	.375 (9.5)	20 .032 (.81)
.015	M	125LS15	1.14	Y5V	.720 (18.3)	.205 (5.2)	.375 (9.5)	20 .032 (.81)
.018	M	125LS18	1.37	Y5V	.790 (20.1)	.205 (5.2)	.375 (9.5)	20 .032 (.81)
.020	M	125LS20	1.52	Y5V	.620 (15.7)	.240 (6.1)	.375 (9.5)	22 .025 (.64)
.022	M	125LS22	1.67	Y5V	.900 (22.9)	.185 (4.7)	.375 (9.5)	20 .032 (.81)
.030	M	125LS30	2.28	Y5V	.720 (17.3)	.240 (6.1)	.375 (9.5)	22 .025 (.64)
.050μF	M	125LS50	3.80	Y5V	.900 (22.9)	.240 (6.1)	.375 (9.5)	22 .025 (.64)
			Note 5				Note 6	

High Cap Valve, Compact Size, X2 Applications

UL 1283 EMI Filters

CSA 22.2

IEC 384-14 2nd Edition
X2 - 400 VAC

Value μF Tol.		Cera-Mite Number	Temp Char.	D Diameter (in/mm)	T Thickness (in/mm)	LS Lead Space (in/mm)	φ Wire Size (AWG/in/mm)
.009	M	20VLD90	Y5V	.530 (13.5)	.150 (3.8)	.375 (9.5)	22 .025 (.64)
.010	M	20VLS10	Y5V	.620 (15.7)	.150 (3.8)	.375 (9.5)	22 .025 (.64)
.010	Z	20VLS50	Z5U	.530 (13.5)	.160 (4.1)	.250 (6.4)	22 .025 (.64)
.020	Z	20VLS20	Y5V	.720 (18.3)	.150 (3.8)	.375 (9.5)	22 .025 (.64)
.100	M	20VLP10 *	Y5V	.940 (23.9)	.240 (6.1)	.375 (9.5)	22 .025 (.64)
						Note 6	

* 20VLP10 not available with CSA 22.2 No. 8 recognition.