

DESCRIPTION

MICRO SIL is a single-in-line Reed Relay using only 15.2 x 3.9 mm of board space which is half the standard SIL requirement.



CHARACTERISTICS

- Contact Form 1A
- Internal magnetic shield

FEATURES


- Diode option available
- High coil resistance option

APPLICATIONS

- ATE systems
- Measurement equipment
- Telecommunications
- Security systems


PIN OUT

View from top of component
3.81mm [0.15"] pitch grid



DIMENSIONS

All dimensions in mm [inches]

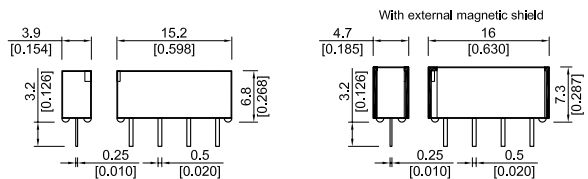

ORDER INFORMATION

SERIES	NOMINAL VOLTAGE	CONTACT FORM	SWITCH MODEL	PIN OUT	OPTIONS	HIGH RESISTANCE VERSION
MS -	XX	1A	71 -	75	X	XX
OPTIONS	05, 12				L, M, D, E	HR

Part Number Example

MS12 - 1A71 - 75L

12 is the nominal voltage
L is the option

OPTIONS

- L = No diode (with internal shield)
- M = No diode (with external shield)
- D = With diode and internal magnetic shield
- E = With diode and external magnetic shield
- HR = High resistance version (5 Volt option only)

MICRO SIL
Reed Relays

RELAY DATA

All data at 20 °C	Switch Model --> Contact Form -->	Contact 71 Form A			
Contact Ratings	Conditions	Min.	Typ.	Max.	Units
Contact Rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching Voltage	DC or peak AC			200	V
Switching Current	DC or peak AC			0.5	A
Carry Current	DC or peak AC			1.25	A
Static Contact Resistance	w/ 0.5V & 50mA			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5V & 50mA 1.5 ms after closure			200	mΩ
Insulation Resistance (100 Volts applied)	Across contacts	10 ¹⁰			Ω
	Contact to coil	10 ¹⁰			
Breakdown Voltage	Across contacts	225			VDC
	Contact to coil	1500			
Operate Time, incl. Bounce	Measured w/ 100% overdrive			0.5	ms
Release Time	No suppression			0.1	ms
Capacitance	Across contacts		0.2		pF
	Contact to coil		2.0		
Life Expectancies					
Switching 5 Volts@ 10mA	DC only & <10 pF stray cap.		1000		10 ⁶ Cycles
For other load requirements please see our life test section located on page 125.					
Environmental Data					
Shock Resistance	1/2 sine wave duration 11ms			50	g
Vibration Resistance	From 10 - 2000 Hz			20	g
Ambient Temperature	10 °C/ minute max. allowable	-20		65	°C
Storage Temperature	10 °C/ minute max. allowable	-25		85	°C
Soldering Temperature	5 sec. dwell			260	°C

COIL DATA

CONTACT FORM	SWITCH MODEL	COIL VOLTAGE		COIL RESISTANCE			PULL-IN VOLTAGE		DROP-OUT VOLTAGE		NOMINAL COIL POWER
All data at 20 °C *		VDC		Ω			VDC		VDC		mW
		Nom.	Max.	Min.	Typ.	Max.	Min.	Max.	Min.	Max.	Typ.
1A	71	5	7.5	252	280	308	0.85	3.5	0.75	3.4	90
		5 HR**	7.5	450	500	550	0.85	3.5	0.75	3.4	50
		12	16	630	700	770	1.9	8.4	1.8	8.3	205
* The pull-in / drop-out voltages and coil resistance will change at the rate of 0.4% per °C.											
** High Resistance version											