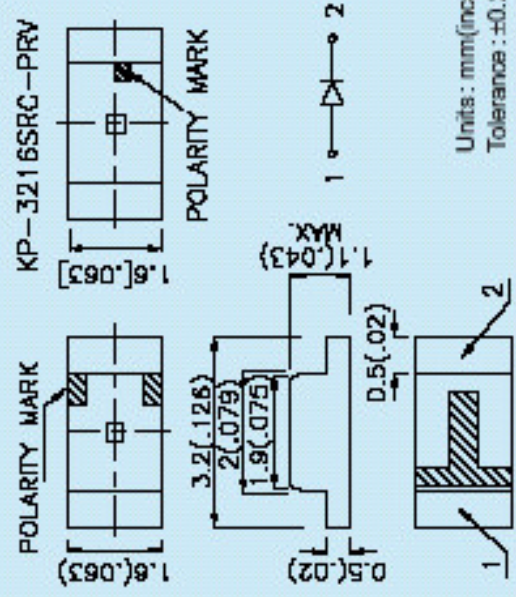


KP-3216		KPT-3216		KPC-3216		KPTR-3216	
							
Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle	Dimension
				Min.	Typ.		
KP-3216EC	GaAsP/GaP	625	water clear	4	12	120°	3.2mm x 1.6mm x 1.1mm (1206)  Units: mm(inch) Tolerance: ±0.2(0.008)
KP-3216SRC-PRV	GaAlAs	640	water clear	36	80	120°	
KP-3216SURC	InGaAlP	628	water clear	70	180	120°	
KP-3216SURCK	InGaAlP	635	water clear	50	150	120°	
KP-3216SEC	InGaAlP	601	water clear	70	200	120°	
KP-3216SECK	InGaAlP	601	water clear	50	160	120°	
KP-3216YC	GaAsP/GaP	588	water clear	2.6	8	120°	
KP-3216SYC	InGaAlP	588	water clear	36	100	120°	
KP-3216SYCK	InGaAlP	590	water clear	18	50	120°	
KP-3216SGC	GaP	568	water clear	4	15	120°	
KP-3216MGC	InGaAlP	568	water clear	18	70	120°	
KP-3216CGCK	InGaAlP	570	water clear	18	50	120°	
KP-3216MBC	GaN	466	water clear	4	10	120°	
KP-3216QBC-C	GaN	470	water clear	36	60	120°	
KP-3216PBC	InGaN	470	water clear	18	45	120°	